

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

CJL 301A2

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/009369

INTERNATIONAL APPLICATION NO.

PCT/US00/12795

INTERNATIONAL FILING DATE

10 May 2000

PRIORITY DATE CLAIMED

10 May 1999 & 25 Feb 2000

TITLE OF INVENTION

MODULAR BUILDING SYSTEM

APPLICANT(S) FOR DO/EO/US


CROWELL, James H.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

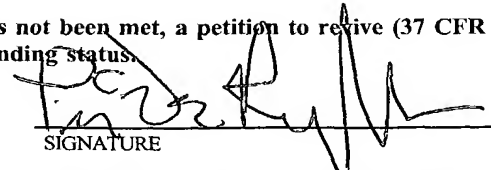U.S. APPLICATION NO. (if known) 10/009369 INTERNATIONAL APPLICATION NO. PCT/US00/12795		ATTORNEY'S DOCKET NUMBER CJL 301A2		
21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =			CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).			\$ 710.00 \$ -----	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	79 - 20 =	59	x \$18.00	\$ 1062.00
Independent claims	7 - 3 =	4	x \$84.00	\$ 336.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$ 280.00
TOTAL OF ABOVE CALCULATIONS =				\$ 2388.00
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.			+ \$ 1194.00	
SUBTOTAL =				\$ 1194.00
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$ -----	
TOTAL NATIONAL FEE =				\$ 1194.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +			\$ -----	
TOTAL FEES ENCLOSED =				\$ 1194.00
				Amount to be refunded: \$
				charged: \$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1194.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>11-1540</u> . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.				
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.				
SEND ALL CORRESPONDENCE TO: Pierre C. Van Rysselberghe, Esq. Kolisch Hartwell Dickinson McCormack & Heuser 520 SW Yamhill Street, Suite 200 Portland, Oregon 97204 (503) 224-6655				
				SIGNATURE  Pierre C. Van Rysselberghe NAME 33,557 REGISTRATION NUMBER

152/PAT

MODULAR BUILDING SYSTEMCross-Reference to Related Application(s)

This application claims the benefit of prior-filed U.S. provisional applications Serial No. 60/133,306, filed May 10, 1999, entitled "Polytech Systems Construction Method", and Serial No. _____, filed February __, 2000, entitled "Insulated Shallow Foundation System". The entire contents of these two provisional applications are hereby fully incorporated by reference into the disclosure of this case.

Background and Summary of the Invention

10 This invention pertains generally to a unique modular building system, and to buildings which can be constructed from the modular elements of that system. In particular, the invention relates to such a system which includes a relatively small number of different parts, many of which are preferably formed of an extrusion-molded polymeric plastic material. Such extrusion-formation of these system parts is
15 especially promoted by the fact that the proposed structural elements in this system, or at least most of them, are slender elongate elements which have uniform cross sections throughout their entire respective lengths. Certain ones of the building components, or elements, of the present invention are employable interchangeably and differentially in different specific operational settings in a building constructed in
20 accordance with the invention, including in settings with one another wherein they are joined to form and coact as structural frame components, such as columns, beams, rafters, etc. These special invention components thus lead to an overall system which requires only a modest inventory of differentiated parts, and which, nevertheless, produces a system offering a large range of operational versatility in terms of the
25 constructions of different kinds of final overall buildings.

In general terms, the system of the present invention includes, in an assembled overall building, a skeletal framework structure formed of long slender parts, and of cooperative assemblies of plural, selected ones of such parts, that act, *inter alia*, as horizontal foundation components, as upright columns, as horizontal beams, as
30 inclined rafters, as perimetral boundary frame elements for and in different kinds of

25 Panels which are assembled to span different generally planar spaces that are defined, and which exist, between different stretches or groups of elongate framework parts, are floatingly (for permitted relative-motion purposes) and reversibly, though captively, disposed in such spaces. Importantly, and as distinguished from related prior art structures, such floating but captured dispositions
30 for such panels promotes, in an overall building constructed with components made in accordance with this invention, a significant relative-motion response capability in

that building with respect to both different kinds of externally applied loads, and to the effects on materials of changes in ambient temperature.

The facts that substantially all of the fundamental building elements of the system can be formed, and preferably are formed, by an extrusion-molded polymer material, and that a high degree of interchangeability and multiple-use possibility
5 attaches to these elements, lead to a system which not only is relatively simple in fundamental construction, but also one which, from many points of view, is very inexpensive, and can lead to the constructions of buildings which also are relatively and strikingly inexpensive.

10 The fundamental modular building components in the system of this invention are, because of the presences of the above-mentioned slide/snap-together connector elements, easily and quickly assembled in varieties of different ways to form myriad types of buildings without the need for additional fasteners. Because of these novel connector elements, a building formed in accordance with the system of the invention
15 can be assembled, on site, by relatively unskilled labor (as was earlier mentioned), and in a very short period of time in relation to conventional building approaches.

Very interestingly, when components constructed in accordance with this invention are fitted together (interconnected) on a job site to create a building, the interconnected components effectively snap and slide together into final, properly
20 structurally and soundly connected relationship. Ultimately in a completed building, the components in each pair of adjacent components are permitted certain limited ranges of unrestrained relative motion with respect to one another.

One important consequence of this condition is that a building constructed in accordance with this invention is internally shiftable and changeable in configuration.
25 Such a building can effectively change its size both in an enlargement sense and in a shrinkage sense in response to an applied external load, and to other phenomena, such as ambient temperature changes. These operational and performance qualities thus produce a building structure which reacts and responds in very unique ways regarding external phenomena of the types just generally mentioned.

30 Thus, and with very few exceptions, all interconnections created in a building so constructed are intentionally established through clearly load-bearing-capable,

though relative-motion-permitting, interlock connections — a feature sharply distinguishing this system from prior art systems wherein interconnected components (or elements) are, for the most part, fixedly anchored to one another against any permitted relative motion. These connections offer substantial structural integrity in the sense of vigorously resisting accidental disconnection.

Not only do the components of the present system thus create a unique shiftable-configuration overall building, but also they create a building which, in response to an applied external load, adaptively self-selects a most-appropriate load-bearing path through the system, which path is uniquely and directly related to the nature, size and point of application of such a load. For example, differently directed loads applied to the very same point of application in a building constructed in accordance with this invention will seek different load-bearing paths through the structure. This unique behavior is especially promoted by the ubiquitous relative-motion interconnection characteristic of the building, and by the natural, resulting selective “bottoming-out” (ending of relative-motion capability) between relevant, adjacent, affected components that define the resulting load-bearing path. The building thus “chooses” different, most-appropriate load-reaction paths “on the fly”, so-to-speak, as loads are exerted on the building.

A number of important consequences flow from this path-choosing capability. One is that the most appropriate load-reaction path required for a given applied load will substantially always be selected. Since such a path is basically selected through a particular combination of (but not all) interconnected building elements, there are always other elements not required for use in such a load-reaction path. These other elements are therefore effectively unloaded by that load, and thus are in “dwell” periods regarding load transmission. Accordingly, over time, each component in a building constructed in accordance with the system of this invention is called upon perhaps only infrequently to carry a load, and thus potentially has a significantly longer effective operational life-span than would a comparable component in a more conventional structure where rigid interconnection is “the rule of the day”.

When deformation-creating loads are applied to a building constructed with components offered by the system of this invention, various interlock connections

Delivery structures (fluid conduits, wires, etc.) employed for conducting and conveying conventional utilities which may be furnished in a particular building such as water, electricity, gas, heating and cooling, fire suppression, television, cable and telephone lines, and so on, are accommodated by self-establishing and pre-configured ways and chases provided, by intentional design, within the various building components. Such ways and chases are pre-designed, according to the invention, into, and with respect to, these building components, and they effectively come together into an organized whole automatically as interconnecting components are brought together to form a building. These utility-accommodating passages form a logical vertical and horizontal utility distribution network throughout a building, and this network is constructed in a manner which makes the ways and chases readily accessible both during initial building construction, and later on if and when utility routing changes are desired. Preferably, and at appropriate locations within a building

constructed in accordance with the invention, different required utilities are distributed in what is referred to herein as a manifold-delivery way.

Void spaces intentionally provided in wall panel structures, and in columns and regions of joinder between two adjacent panels, allow for the ready flow of air, and drainage of water. Draining water both from such wall, column and joinder regions, as well as any water that requires drainage from within a building's floor structure, flows by design downwardly into passages made directly accessible in the foundation structure, thus to allow for confident, automatic water discharge from regions in a building where it could eventually (or even in a short period of time) cause serious problems.

The various different building structures whose assemblies are made possible by the system of present invention can uniquely include a number of additional, very interesting features. For example, the novel foundation structure proposed by the invention is one which can be equipped with appropriately controllable vents or ports that allow for the flow of air under flooring in the system, and for the containment (in large reservoirs) of stored water which may be employed for fire-suppression purposes, for heat-sinking and temperature-stability purposes, and for anchor-weighting of a building which may, for example, sit directly on top of the ground.

A structure constructed in accordance with the system of this invention also allows for easy incorporation into a building of various moveable structures, such as moveable panels/screens which can control the amount of light admitted at different locations, and for other purposes. Buildings can, because of convenient system modularity and versatility, be differently rendered in different climates to achieve maximum environmental (such as solar) efficiency. Walls within the overall building (internal walls), as well as external walls, can easily be removed, added, repositioned, etc. substantially without any destructive consequences, and freely at will over time. The respective placements or positions of certain panels can be changed as desired. For example, a panel containing a window and/or a door may readily be positionally switched with another kind of panel.

According to a preferred embodiment of a foundation structure constructed in accordance with this invention, the same takes the form of a two-component

organization including a central solid core, preferably formed of poured concrete, and rigid-plate jacketing structure, preferably formed with several components created out of molded and extruded polymeric material. This jacketing structure coacts with the core to transmit overhead superstructure loads to the ground. Such two-component foundation structure preferably has a lateral outward flare, or splay, progressing downwardly through it from the region of the superstructure to the ground. With such a flare, and because of the presence of the lateral jacketing structure, this kind of foundation structure delivers load to the ground in a unique fashion. Specifically, such a foundation employs and permits various respective and differentiated reactions to loads that need to be transmitted to the ground, all as determined by the direction and character of such a load, and all in relation to the cooperative but differentiated handling of loads, on the one hand by the core, and on the other hand by the jacketing structure. A foundation structure constructed in this fashion itself offers a degree of variable selection of the most efficient and effective path through the foundation for the transmission of loads to the ground.

The use of polymer plastics to form substantially all of the fundamental building components proposed in accordance with this invention results in a created building construction which is especially resistant to decay, to other deterioration, to insect invasion, and to other invasive and lifetime-shortening problems that are associated with many of the usual materials found in a conventional building structure.

As was mentioned earlier, building assembly (construction) in the field is characterized by quick and easy slide/snap-together interfitting of components. Such activity, as has already been stated, requires no specialized tools or costly labor. It also avoids conventional time-consuming on-site fabrication procedures, such as the cutting and fitting of parts.

Components that are shipped to a job site for assembly into a building can be shipped very handily in "disassembled", low-volume-occupying space, and thus can be transported effectively as a pile or collection of components stacked, for example, in conventional load containers.

Many other features and advantages that are realized and offered by the system of the present invention will become apparent as the description which now follows is read in conjunction with the accompanying drawings.

Description of the Drawings

5 Fig. 1 is a simplified, fragmentary top-perspective view of a building constructed with modular building components formed in accordance with the present invention. Only certain selected parts and regions of this building are shown in this figure (others being removed/omitted) in order to use this figure generally and effectively to offer a general overview of an organization of structural components
10 illustrating the versatility of the invention.

Fig. 2 is another fragmentary view of the building of Fig. 1, illustrating reactive load-handling responses produced by that building in relation to the application of two different specifically applied "overhead" external (on the roof structure) loads.

15 Fig. 3 is a simplified, block/schematic, story-telling view illustrating how building components constructed according to the present invention, incorporated into the building of Figs. 1 and 2, respond to create different, specific, load-bearing paths through the building between the point of external load application and the ground.

20 Fig. 4 is a simplified, block/schematic, story-telling view illustrating, under two different conditions of external load application, unique configurational-change, and size-change, responses that are offered by the building of Figs. 1 and 2 in accordance with the performance of parts made according to the present invention.

Fig. 5 is a fragmentary, elevational cross section taken generally along the line
25 5-5 in Fig. 1, illustrating the organization of certain components visible in a transverse vertical plane intersecting the building of Figs. 1 and 2.

Fig. 6 is an isolated and detached perspective view of three different illustrative kinds of panel structures which are constructed in accordance with the present invention -- which panel structures may form part of the building shown in
30 Figs. 1, 2 and 5.

Fig. 15 is a somewhat enlarged, fragmentary, cross-sectional view, taken
30 generally along the line 15-15 in Fig. 14.

intersection is one that permits relative sliding motion (of the stress-relief kind generally required by temperature changes) between such a wall and roof structure.

Fig. 22 is an enlarged, fragmentary, cross-sectional view, also taken generally in the region embraced by curved arrows 19(20,22)-19(20,22) in Fig. 5, and looking
5 into a plane which extends through that region with a disposition that is substantially normal to the plane of Fig. 5.

Figs. 23, 24 and 25 are fragmentary, cross-sectional views generally illustrating a typical region of intersection and interconnection between a rafter, roof structure and a wall structure.

10 Figs. 26A, 26B are simplified and isolated views illustrating, respectively, a plan view and an elevation view of the point of connection existing at the region of joiner between two building end wall panels in the building of Figs. 1, 2, 5 and 7, and at the location generally of the floor structure and the underlying supporting foundation structure.

15 Fig. 27 is an enlarged, fragmentary view illustrating a portion of one style of a roof panel employed in the building structure depicted so far, such panel being characterized by two different kinds of panel subsections that are joined within the illustrated overall panel.

Fig. 28 is a view taken generally in the region of curved arrows 28-28 in Fig. 7
20 illustrating details of construction of one embodiment of ridge structure, including optional panel, screen, etc. motion structure, constructed in accordance with the invention, and present in the building of Figs. 1, 2, 5 and 7.

Figs. 29, 30 are isolated and functionally related fragmentary details
25 illustrating other component structure which is associated with the motion structure that is pictured in Fig. 28.

Fig. 31 is a fragmentary cross-section taken generally along the line 31-31 in Fig. 28.

Figs. 32, 33 are isolated and fragmentary details illustrating other components in the motion structure generally otherwise pictured in previously-mentioned Figs.
30 28, 29 and 30.

Fig. 34 and 35 are enlarged, fragmentary views illustrating, respectively, a vertical section and a horizontal plan view of portions of a water-reservoir system constructed according to one modification of a system implemented in accordance with the present invention.

5 Figs. 36, 37 individually, and Figs. 38, 39 collectively, illustrate several different alternative embodiments of foundation structure for a building which is otherwise like the building pictured in Figs. 1, 2, 5 and 7. These different embodiments deal specifically with different specific ground-contacting, and structure-elevating, approaches to building construction.

10 Figs. 40-42, inclusive, are fragmentary details, each very much like the detail pictured in previously-discussed Fig. 18, showing three different modifications of connector elements that can be employed in interconnect structure prepared in accordance with the features of the present invention.

15 Figs. 43, 44 are, respectively, vertical-plane and horizontal-plane sectional views illustrating components in vertical wall structure employed to create motions in shutters or screen modifications that are employable in a building constructed with the system of the present invention. Fig. 44 is taken generally along the line 44-44 in Fig. 43.

20 Figs. 45-48, inclusive, are different fragmentary views generally illustrating certain components constructed in accordance with the present invention, and usable in a modified form of building construction which also employs certain otherwise conventional building materials. These views generally show and suggest how various such other materials can integrate easily into a building constructed in accordance with the invention.

25 Figs. 49, 50A, 50B and 51 are simplified, and in certain instances exploded and fragmented, views of the construction of a panel structure which can be built substantially completely by extrusion molding, and as a whole (a singularity), in accordance with the present invention.

30 Fig. 52 is a fragmentary, enlarged detail illustrating a novel power- conductor bundle arrangement employed according to the present invention in a building such as the building illustrated in Figs. 1, 2, 5 and 7.

Detailed Description of, and Best Mode
for Carrying Out, the Invention

Turning attention now to a detailed description of the present invention, the same is specifically illustrated and especially described herein in conjunction with the several numbered drawings views which have just been identified above. As will be appreciated by those generally skilled in the arts which are relevant to the field of the present invention, these drawings, or at least many of them, have been prepared substantially at the level of conventional architectural/engineering building drawings, with clearly sufficient detail to inform such people exactly how the pictured structures are formed and inter-related. Not all of the details thus specifically presented in these more detailed drawings views need necessarily be described with any elaboration in order for one to understand the elements and principles of the present invention, and accordingly, and in order to maximize clarity and minimize having to deal with unnecessary excess information, such additional details pictured in the drawings are not specifically talked about in the text which now follows. Also, where the same or different particular drawings views illustrate constructional features of the present invention which appear at several locations in the drawings, while these locations are selectively pointed out herein, unnecessary repetitive detailed description for each has been intentionally omitted, also with the intention of promoting clarity in the exposition of this invention.

As an additional matter accompanying the specification, claims, text and abstract in this application is a section identified as an Appendix which contains a collection of unnumbered architectural/engineering drawings views, some of which have been employed in an extracted and focused fashion to create the specifically numbered drawings views mentioned above. These Appendix drawings provide an additional rich and fully expressive collection of material further aiding in disclosing the character and scope of the present invention. These drawings, just as is true with certain ones of the numbered drawings views herein, are in a conventional form, and are easily read and understood by persons in the category mentioned above as being those generally skilled in the fields of art associated with the instant invention.

Pictured in Fig. 1 in the drawings is an overall building 100 which has been constructed utilizing components constructed in accordance with the present invention. Building 100 includes a foundation structure 102, a floor structure 104 resting on the foundation structure, outside end wall and side wall structures, such as those shown at 106, 108, respectively, rising upwardly from the foundation and floor structures, upright outside end wall, corner and side wall columns, such as those shown respectively at 110, 112, 114, roof panel structure 116, roof-supporting elongate rafter structure 118, roof ridge beam structure 120, and interior wall panel structure, such as that shown generally at 122, extending generally between floor structure 104 and roof panel structure 116.

In general terms, the various building structural elements or components progressing from the floor structure upwardly to and including the ridge beam structure are collectively referred to herein as superstructure, and these are, of course, supported, at least in part, on foundation structure 102. In the particular building, building structure 100, illustrated in Fig. 1, foundation structure 102 resides in a category referred to herein as a ground-contacting, ground-penetrating structure which is embedded into the ground in such a fashion that, essentially, the bottom expanse of building 100 immediately underneath the floor structure rests, as will soon be described, on the underlying ground which may be prepared, for leveling and adequate support purposes, with a particulate material such as sand and/or gravel. Embedment, thus, of foundation structure 102 is illustrated and suggested by the fragmentary showing at the lower side of Fig. 1 of the underlying ground, pictured generally at 124.

Briefly mentioning at this point several other things which are illustrated in Fig. 1, toward the left side of Fig. 1 there are shown two double-ended crossed arrows 126, 128, and a pair of double-ended curved arrows 130, 132. Toward the lower side of Fig. 1 are shown two differently directed double-ended straight arrows 134, 136, and a double-ended curved arrow 138. Toward the upper right corner of Fig. 1 there are shown three orthogonally intersecting double-ended straight arrows 140, 142, 144. On the left side of the roof structure pictured in Fig. 1, appear two orthogonally intersecting arrows 141, 143. As will become more fully apparent in the description

text given below, these arrows will be understood to be illustrative of relative-motion and related configurational-change activities that are permitted to occur in building 100.

Specifically, these several straight and curved arrows are employed herein to
5 explain and describe certain relative-motion and configurational-change behaviors that are uniquely exhibited by the system of the present invention in the form, as now being described, of building 100 under circumstances when that building is subjected to various potentially deformation-creating forces, such as wind forces, earthquake forces, ambient temperature changes, falling and otherwise impacting objects, and
10 other kinds of circumstances. These relative-motion and configurational-change capabilities are furnished as a consequence of the unique manners in which all of the several basic component parts of the system of this invention which make up building 100 join with one another in the final overall building structure.

Illustrated near the right side of Fig. 1, and pictured fragmentarily and
15 specifically in a lower corner region of building 100 by dashed lines which intersect at enlarged dots, there is shown a portion of one of the several different utility distribution structures that are furnished in building 100 in the manner which is referred to herein as a manifold distribution manner. As an illustration, these several dashed lines might, for example, reflect the positions of manifold delivery conduits
20 associated with a fresh water delivery systems. As will become apparent from the description which follows below, and from a review of the various drawings presented in the specification, void spaces that are present in various ones of the several building components that make up a building like building 100 afford adequate and versatile space for the incorporation of such manifold structure.

Turning now for a moment to Figs. 2, 3 and 4, these three views further
25 illustrate load-response characteristics of a building such as building 100. Fig. 2 specifically illustrates building 100 in a somewhat more completed form, and demonstrates certain kinds of load responses which are performed by this building as a consequence of two differently applied roof loads pictured generally at 146, 148 in
30 Fig. 2. These roof loads cause bowing deflection of the related underlying roof panels,

and delivery of loads to the ground along different paths through the structure of building 100. Such paths are pictured in Fig. 2 by arrays of arrows.

Fig. 3 illustrates in an exaggerated and story-telling way how the components, or certain ones of the components, in building 100 coact according to the invention to define different load-reaction paths through the building between a single point of overhead external load application with respect to which two differently directed loads, labeled L_1 , L_2 , are applied. Load L_1 in Fig. 3 is reacted to by relative motion activities in a certain collection of parts and components in building 100 to create what can be thought of as a stacked collection of building components with respect to which bottoming out has occurred, i.e., relative motion has reached the limits of possibility, to establish a load-transfer path P_1 between load L_1 and ground point G_1 . The "stacked" components are represented by the small rectangles aligned along path P_1 .

Reaction to load L_2 takes place through another "stacked collection" of interengaged components in building 100 to define another load-reaction path P_2 which extends through building 100 from the point of application of load L_2 to a different ground point, designated G_2 in Fig. 3. Building 100 thus effectively chooses, on the fly, the most appropriate load-reaction path to employ for handling each one of loads L_1 and L_2 , and effectively requires only the best suited limited number of building components to transfer these loads. Other components in the building are effectively unloaded specifically by these loads, and thus are in the mentioned dwell periods respecting times of load transmission experienced throughout the life of building 100 by the various elemental building components in the building.

Fig. 4 is also a schematic story-telling view illustrating another response characteristic of building 100 promoted by the features of the present invention. Here, two differently located loads L_1 , L_2 are pictured applying loads, respectively, to the upper portion and to the right-side portion of the building as such is pictured in simplified block form in Fig. 4. Upper load L_1 is represented by a dashed-line arrow, and load L_2 by a dash-dot line arrow.

The building in an unresponsive state with respect to either one of loads L_1 , L_2 is represented by the rectangular solid outline presented for the building

schematically in Fig. 4. Response by the building to load L_1 is pictured in a highly exaggerated fashion by the dashed-line distortion shown at 100_{L1}. Similarly, distortion and load-response reaction of the building under the influence of load L_2 is pictured by the dash-dot line designated 100_{L2}.

5 These two exaggerated, but accurately otherwise, representative pictures of building distortion show that building 100 reacts variously to an applied load, such as loads L_1 , L_2 by changing its overall configuration, and where appropriate, by shrinking and/or enlarging in overall size in various regions of the building. These responses are uniquely promoted by the relative-motion interconnect structures
10 featured as an important contribution of the system of the present invention.

Continuing now with a focus directed toward Figs. 5-13, inclusive, the section view presented in Fig. 5 of building 100 further shows the organization in that building of foundation 102, floor structure 104 (exploded vertically), an outside wall column structure 114, an outside wall panel structure 108, an inclined rafter structure
15 118, and a roof panel structure 116. An inside wall panel structure is shown generally at 122.

Also generally illustrated in Fig. 5, and pointed to very generally by arrows 123, is an exploded representation of various components in utilities distribution structures in the categories mentioned earlier, which structures are threaded through
20 appropriate accommodating spaces in the various building components in building 100 such as the floor structure, the wall structure, the column structure and the rafter structure.

Fig. 6 pictures, in perspective, three isolated different panel structures constructed in accordance with this invention, generally aligned in side-by-side
25 horizontal relationship, and including a door panel structure 150, a solid, non-light-passing panel structure 152, and a transparent light-passing panel structure 154. Particularly relevant to the present invention in relation to these three panel structures is that each of these panel structures is formed around its perimeter by a bounding frame or framework, such as the frame shown generally at 156 surrounding the
30 central spanner portion of panel structure 154. As will be more fully explained shortly, this perimeter frame structure is constructed from elongate, extrusion-molded

polymer components that are built strictly in accordance with the present invention, and that are appropriately interconnected to create a completely encircling panel frame structure.

Fig. 7 is a partially disassembled exploded view which further pictures certain components also pictured in the section view of Fig. 5. Thus, in Fig. 7, the following previously-mentioned structural components are illustrated: foundation structure 102, column 114, and rafter 118. An internal cave beam structure is shown disposed beneath rafter 118 at 156, and the ridge region in building 100 is resident generally within the area embraced by the two curved arrows labeled 28-28 in Fig. 7.

Referring now very specifically to Figs. 7, 8 and 10-13, collectively, foundation structure 102 takes the form of a two-component foundation structure built in accordance with a preferred embodiment of the present invention. Specifically, foundation structure 102 effectively supports the superstructure in building 100 so that it rests both on this foundation structure and on the underlying ground 124. The components that make up what can be thought of as the outside structural portions of foundation structure 102 are formed of molded polymeric material, and are interconnected with one another in a manner shortly to be described to form a perimeter frame that rests solidly on and within the underlying ground to support building 100.

Foundation structure 102 includes a plurality of groupings of laterally spaced outer jacketing lateral structures, such as those shown at 158 that are formed with generally parallel, spaced, rigidly connected angular planar plate portions such as the three plate portions shown at 158a, 158b, 158c that are disposed relative to one another in a somewhat flattened Z-shaped configuration. Preferably, these structures that are numbered generally 158 include substantially matching counterpart upper and lower portions that are brought together to form the overall shape, and this construction is shown especially in Fig. 11 in the drawings. The upper and lower components which collectively form these now-being-described parts of the foundation structure are suitably joined to one another in any appropriate manner.

As can be seen especially in the exploded illustration presented in Fig. 13, these angular lateral structures form the opposite outer jacketing sides of the overall

foundation structure, and they are joined to one another preferably in a telescopic fashion by appropriate linear and angular telescopic connectors, such as the two shown at 160, 162 in Fig. 13. Within the overall foundation structure, these several components, whose respective constructions are quite self-evident as pictured in Fig. 13, are suitably anchored relative to one another by any appropriate joining mechanism, such as by locking pins like those shown generally at 164 in Fig. 13.

Along the sides and ends of the foundation structure with the components therein just described in their appropriate positions relative to one another, open spaces, such as that generally pointed to at 166, expose the regions between Z-shaped side components, thus enabling these components to accommodate the pouring of what will become a solid core material in the foundation, such as concrete. After pouring and curing of such concrete, the foundation structure essentially becomes a two-component structure including a core and lateral jacketing structure, which jacketing structure splays outwardly progressing downwardly through the foundation structure to transfer loads to the ground differentially through each of these two basic component contributors in the foundation structure. Significantly aiding in speeding up the process of construction of a building made in accordance with the present invention, it will be apparent that the lateral perimetral jacketing structures just described can easily and quickly be put into place on or within the appropriate ground site. Concrete can then poured into the spaces just mentioned, with the lateral jacketing structure acting effectively as a form for pouring, and permitting other important construction activities, such as the back-filling of earth in and around the foundation, to take place immediately, inasmuch as these foundation components which will become permanent parts of the ending foundation fully protect the curing concrete core material.

Elongate bolts, such as those shown at 168, 170 in Figs. 7, 10 and 12, extend vertically through suitable accommodating bores provided in selected ones of similarly shaped, related angular foundation components and downwardly into the region where concrete is poured, to become securely anchored in the foundation when poured concrete has in fact cured. These bolts, through the adding of appropriate sets of nuts along their lengths allow for very easy and convenient and

accurate permanent leveling of the overall foundation structure on the selected building site.

Shown generally at 172 in Figs. 10, 12 and 13 are shelf-like holders that are carried as shown on the just-mentioned bolts to hold conventional reinforcing rebars within the concrete core – such rebars being shown generally at 174 in Fig. 12.

Cured concrete in foundation structure 102 is shown generally at 176.

Disposed according to one unique feature of the present invention at the lower end of bolt 170 in Figs. 7, 10 and 12 is a moderately broad adaptive foot, also referred to herein as an octopus 178. Octopus 178 is formed with downwardly extending elastomer tentacles that can be driven downwardly against a projecting underlying structure, such as the rock shown at 180 in Fig. 12, to accommodate free positioning of the overall foundation structure even where it directly overlies such a protruding structure. In Fig. 12, octopus 178 is shown in a condition thus engaging the top projecting surface of rock 180. The presence of the mentioned elastomeric downwardly extending tentacles in the octopus accommodate confident stabilizing of bolts, such as bolt 170, in a vertical sense during pouring and curing of the concrete core material in the foundation.

Appropriately and preferably positioned within the otherwise void spaces that exist in the regions laterally bounded by portions 158b in the Z-shaped foundation structures mentioned earlier, are elongate runs of any suitable thermal insulating material, such as the blocks of insulating material shown generally at 182 in Figs. 7, 8 and 11.

Fig. 9, with respect to foundation structure 102, illustrates how radon evacuation and water drainage can be provided in and with respect to the foundation structure. Specifically, indicated generally at 184 in Fig. 9 is an appropriate radon venting structure organization, and at 186 is water drainage structure. These structures may conveniently and appropriately be positioned at several different selected locations around the foundation structure.

Considering now Figs. 14-16, inclusive, here one can see how a preferred embodiment of foundation and ground-supported floor structure in building 100 are constructed. While there are many different ways in which a floor structure which is

usable according to the teachings of the present invention, in building 100 floor structure 104 is, as a whole, an expansive layered structure that is made up of a plurality of generally rectangular flooring tiles which are themselves layered structures. A description generally of one only of these tiles will serve to describe this
5 floor structure.

In the particular embodiment now being described in which the superstructure in building 100 rests at least in part on the underlying ground, lying immediately beneath floor structure 104, as a thin, distributed web of material, is a blanket 188 taking the form of a metallic foil outer material which contains inside it an insulating
10 material. This blanket simply lies by gravity on the space over the ground spanned by foundation structure 102, and specifically and preferably lies on an underlying ground surface which has been prepared for the appropriate grade by spreading and grading thereon of a particulate material such as sand or gravel. The specific material employed in blanket 188 takes the form of a commercially available insulating
15 material which is often used in the walls of buildings, in space suits, and in other applications. Disposed immediately above blanket 188 are polymer-extruded shaped components, such as component 190, which are preferably formed by extrusion molding. Disposed above these floor base components, and also preferably formed by molding, are overlying structures such as the one shown generally at 192 which are
20 configured internally with void spaces that are useful to create ways and chases for the feeding of various utility structures in different directions for routing in building 100. The exact internal configurations of structures 192 may be made differently to suit different applications, and accordingly, the precise details of construction here are not further elaborated, inasmuch as they do not form a portion of the present
25 invention.

In Fig. 14, shown generally at 194 are appropriate elongate runs of manifold-like utility feed structure required in building 100, such as feed structure for water, gas, high and low voltage electricity, telephone, cable, fire suppression and other things.

30 Immediately overlying structures 192 are tiles, such as the one shown at 196, which, in the particular building construction now being described, constitute the

interior finished floor. In building 100, tiles 196 are formed of a conventionally available, so-called phase-change material which is effective to evenize the temperature inside building 100.

Focussing attention specifically on Figs. 15 and 16, one can see that the lateral
5 edges of tile structures 192 in the overall floor structure are formed with the special angular configuration pictured generally at 192a in Figs. 15 and 16. Where the edges of the tile come essentially to the outside wall portion of building 100, these configured edge structures interlock with a molded extruded structure such as the one pictured at 198 in Fig. 15, each of which has the cross-sectional configuration clearly
10 pictured in Fig. 15. Interconnection here, which is a reversible interconnection according to the invention between the outer edge of tile 192 and a structural member 198, is pictured at 200 in Fig. 15.

Where adjacent floor tile components meet within the interior of the building, such a meeting being generally pictured fragmentarily in Fig. 16, tile units 192 are
15 interlocked with one another as is pictured generally at 202 in Fig. 16. Completing a description of what is shown in Figs. 15 and 16, where previously mentioned wall panel structure 108 comes down to the foundation structure in the building, one of the outer defining frame members in that wall panel structure, shown at 204 in Fig. 15, which frame structure is made in accordance with the invention of an extrusion-
20 molded polymeric material, the cross section of this part, clearly illustrated in Fig. 16, interlocks sturdily yet reversibly as shown generally at 206 with the immediately underlying confronting portions of the edge of tile 192 and member 198. Generally speaking, the type of interconnect connection which has just been mentioned at 206 in Fig. 15 is formed by confronting and mating connector elements having the
25 respective cross-sectional shapes pictured in Fig. 18 in the drawings. While this arrangement of interconnecting connector components is pictured with one particular orientation in Fig. 15, and in a different particular orientation in Fig. 18, it will be apparent to those skilled in the art that this type of interconnect connection will be used at many points of component interconnection sites throughout the structure of
30 building 100. A review of the drawing figures so far described, coupled with reviews of various drawing figures not yet specifically described, will show those skilled in

the art clearly how and where such interconnect structures are distributed within building 100.

Looking again fairly specifically at Figs. 15 and 16, one will note that, in the regions of connections previously identified with the reference numeral 202, the
5 matingly interconnecting extruded components there pictured form an elongate, bounded void space within which various utility components, such as pipes and wires if desired, can be contained.

Still remaining with Figs. 15 and 16, illustrated near the left sides of those two figures by elongate dashed lines which terminate with an arrow head, paths for water
10 drainage that are provided both from upright wall and column structure and from horizontal floor structure downwardly into and through the foundation structure are illustrated. These drainage paths, which paths can also accommodate the normal flow of air, play an important role in minimizing the possibility in building 100 of an accumulation of water that can cause damage.

15 Focussing attention just for a minute again on the nature of the interconnection pictured especially in Fig. 18, one can see that this interconnection is designed in such a fashion that it will permit relative rotation, as for example within the plane of Fig. 18, between the associated integral components in the system, and additionally, can accommodate, within limited ranges, translational motion in all orthogonal
20 directions. It is this feature of all the interconnect structures that form part of the present invention which produces the capability of interconnected components to move relative to one another by certain limited amounts, to accommodate the handling of matters such as externally applied loads and environmental temperature changes experienced by building 100.

25 Considering now together Figs. 17, 19 and 20, and especially considering what is shown in Fig. 17 as being a view initially taken vertically along the axis of previously-mentioned column structure 114, that column structure includes what can be thought of as a central, elongate, extrusion-molded component which is given the reference numeral herein 208. Figure 17 clearly shows the preferred cross section for
30 this member, and one will notice that distributed at various locations on and about the outside of the perimeter of the cross section in this member are extending, integral

connector elements like those pictured in previously-discussed Fig. 18. The outside portion of member 208 is capped by another extrusion-molded member 210, and the inner side of the column member is joined with another elongate, extrusion-molded member 212. Each of members 210, 212 is formed in accordance with the teachings
5 of this invention to have the cross-sectional shapes clearly evidenced in Fig. 17, and when they are put into operative positions relative to member 208, they latch releasably and interconnect with that member as is shown in Fig. 17. Each of these connections, just as was true in the case of previously-mentioned connection 206, is characterized by offering limited ranges of relative angular and/or translational
10 motion between components 208, 210, 212.

The right side of previously-mentioned wall panel structure 108 in Fig. 17 is effectively joined to column structure 114 through its right-side perimetral frame member 204 which is the same in cross-sectional configuration as was pictured for this kind of member at 204 in Fig. 15.

15 Shown on the right side of Fig. 17 is another panel structure 214 which is different in specific internal construction relative to panel structure 108, but which also includes a perimeter frame formed effectively of previously-mentioned members 204. The connection between column structure 114 and panel structure 214 are also clearly evident in Fig. 17.

20 Just as was true with respect to the operative interconnections established between components 208, 210, 212 as these are seen in Fig. 17, the connections which effectively exist through molded, elongate components formed in accordance with this invention that snap together to unite column structure 114 with panel structures 108, 214, permit the same general kinds of limited, but nevertheless
25 consciously permitted, relative angular and/or translational motions in the assembled structure.

Fig. 19 illustrates the location of a horizontal beam such as previously-mentioned beam 156 shown in Fig. 7. The cross-sectional configuration of beam 156 is displayed clearly in Fig. 19, and through an appropriately joined underside elongate
30 element 216, this beam joins with the upper perimeter frame member 204 in panel structure 108. An upper flange shown in Fig. 19 in beam 156 slidably engages the

between relevant components in a building, and which also furnish the desired limited-range capability for angular and/or translational relative motion.

Fig. 21 illustrates the confronting condition which exists along the upper edges of internal wall structures in building 100. Specifically, shown at 218 in Fig. 21 is a plastic-molded configured member which is snap fit to the upper frame member, like previously-mentioned frame members 204, in the associated wall, to extend upwardly and provide for sliding engagement with the underside of the immediate overlying roof structure. Member 218 is appropriately formed with an upwardly facing elongate socket, such as that pictured generally at 218a in Fig. 21. This socket receives an appropriate cushioning element pictured generally at 220 in Fig. 21. It should be understood that the specific kind of snap-fit interconnection which exists between member 218 and the associated underlying wall panel is not specifically illustrated in Fig. 21, but would take the form generally of interconnections of the sort pictured for example in Fig. 17 at the lower side of that figure.

In Fig. 22 we see a fragmentary vertical cross section through column structure 108 and other related, interconnected structures. Anchored in any suitable fashion, as by chemical bonding, in the upper reaches of the central stem portion of column 108 is a specially configured capping member 222 which joins as shown snappingly and in an interlocked condition with previously-mentioned rafter structure 118. Other components shown in Fig. 22 are several of those other components described in the descriptions just above with respect to Figs. 17, 19, 20 and 21.

Turning attention now to Figs. 23-25, inclusive, here what is pictured are several related views, sectional details, illustrating a region of interconnection between rafter structure 118, and a pair of laterally adjacent wall panels that reside immediately beneath this rafter. The two wall panels involved in these views are numbered 224, 226. The upper sides of these panels are appropriately angled, as the panels are viewed from the side, in order that they will match the angular configuration within the building at the location wherein they are installed. Accordingly, perimeter frame members 204, at the upper reaches of these wall panel structures, are appropriately angularly cut at their ends as are the upper ends of the laterally-defining panel frame members, so that these panel frame members come

together to form a matching coherent perimeter frame relative to the specific regions where they are intended to be used in building 100.

Referring especially to Fig. 25, yet another elongate, extrusion-molded polymer plastic component made in accordance with the invention, which component
5 is employed at various appropriate locations to define part of a spanning interconnection between adjacent wall panels, is shown in two locations at 228 in Fig. 25. Components 228 which, as was just mentioned, are employed at various other locations distributed throughout the building 100, coact with the other components which they interconnect, and specifically components 204, as pictured in Fig. 25 to
10 permit the same kind of limited-range relative motion discussed earlier.

Completing the description of interconnect structures pictured in Figs. 23-25, inclusive, shown at 230 in Figs. 23 and 24 are two independent molded plastic connectors having the cross-sectional configuration clearly pictured in Fig. 23, and operating to perform internal interconnections between upper panel frame members
15 204 and the inside of portions in rafter structure 118.

Pictured at 232 in Fig. 25 is another independent-molded plastic interconnect member which, as such is seen in Fig. 25, spans the space between wall panel structures 222, 226 to interconnect these two panel structures via internal engagement within what can be thought of as the exposed interiors of the two confronting panel
20 frame members 204 that are clearly pictured in Fig. 25.

Finally, shown at two locations in Fig. 23 are additional independent interconnect members formed in accordance with the present invention, and these members, as such are shown in Fig. 23, interconnect connector elements exposed in the confronting portions of panel frame members 204 and rafter 118 as shown.

25 Digressing for a moment to another sort of structure which is present in building 100, indicated generally at 236 within the structure (interior) of rafter 118, are fluid flow components which make up a portion of a fire-suppression system which is conveniently routed through the structural elements of the present invention and within the confines of building 100.

30 Still referring to the structures of connectors 230, 232, one will note on looking at them in the drawings that they are formed effectively which would end up

to be accommodating clearance passageways toward their opposite ends which allow for the separation and routing of, for example, conduits carrying water and conductors carrying electricity. This important approach which leads to internal separation of such two potentially dangerously conflicting structures is made present
5 throughout building 100 as accommodated by the unique cross sections of the various modular building elements formed in accordance with the invention.

Generally in the region of the location of capping structure 244, and if desired, appropriate openable and closeable vents or ports may be provided which will act with venturi behavior in building 100 to promote effective air flow into and through
10 the building.

Figs. 26A, 26B illustrate, in plan and in elevation views respectively, and isolated from other structures, is an anchoring plate which is employed at the opposite gable ends of building 100, and immediately beneath the regions of joinder between adjacent outside end wall panels, to anchor the assemblage of these panels suitably to
15 the underlying structure in foundation 102, without requiring a full column.

Turning attention now to Fig. 27, here there is shown in isolated fragmentary form a portion of previously-mentioned roof panel structure 116. This panel structure, as such is illustrated herein, is formed to have two different types of panel areas. Fig. 27 specifically illustrates how these two different panel areas, generally shown by
20 arrows 116a, 116b in Fig. 27, are interconnected according to the use of extrusion molded components formed in conjunction with implementation of the present invention.

The exact natures of these two different characteristics in a single roof panel are completely a matter of choice, and Fig. 27 is simply provided as a general
25 illustration of how such differentiated panel characteristics can be created in a single spanner panel constructed in accordance with this invention.

Focussing attention now specifically on Figs. 28-33, inclusive, here one finds a plurality of largely, self-explanatory views that illustrate one modification of ridge structure formed in accordance with the present invention, and included in building
30 100 generally in the region previously mentioned, and contained within curved arrows 28-28 in Fig. 7. What is specifically pictured in these several views is a ridge

structure which has been equipped, in accordance with an optional feature that happens to be included within building 100 to produce motorized motion and transport of various kinds of sliding panels and/or screens in the roof structure of building 100. All of the details of all of the componentry pictured in these figures are
5 not specifically discussed herein, inasmuch as these views are, as was just mentioned, quite self-explanatory.

Assuming that the view presented in Fig. 28 is taken in the plane containing previously discussed rafter structure 118, one can see that this rafter structure (shown on the left side of Fig. 28) extends toward the ridge area in building 100 where it
10 confronts a similarly extending rafter structure 119 that extends toward the ridge region of the building from the right side of Fig. 28. The confronting ends of these two rafter structures are anchored as by bolting to a pair of plates shown at 240 in Fig. 28, which plates are angularly disposed relative to one another as is shown, and form part of previously mentioned roof ridge beam structure 120. Appropriate ridge
15 capping structure 244 extends over the ridge area along the length of the building.

Appropriately disposed within the upper reaches of the void space defined within the interior of ridge beam 120, and pointed to generally by arrow 246 in Fig. 28, is a motorized rotary take-up and pay-out drum and line structure, including lines that are shown extending toward opposite lateral sides of the building, generally
20 at 248, 250. This line structure is connected to appropriately mounted roof panel structures that are designed for sliding motion back and forth within the roof structure. There are various and many ways in which such slidable and movable roof panel structure components can be fabricated, and accordingly, and since the details of these constructions form no particular part of the present invention, these details
25 are omitted from illustration and discussion specifically herein.

Still with reference to Fig. 28, and now including additional reference specifically also to Figs. 29, 30, pictured generally at 247 in Fig. 28 is a motorized rotary take-up and pay-out drum and line structure which is employed in building 100 to control the motions of two laterally-disposed screens that are provided as an option
30 in building 100. In many ways, this motorized structure is similar to the one previously and briefly discussed just above. Figs. 29 and 30 show, respectively, a

spring-loaded take-up and pay-out drum structure that is located basically at the left side of the building structure as such is pictured in Fig. 28, and specifically at the location of previously-mentioned eave beam 156. This structure functions to react against turning operation of a motorized structure 247 in Fig. 28.

5 Fig. 30 is a fragmentary view illustrating guideways that are provided on opposite sides of previously-mentioned rafter 118 to guide the sliding back-and-forth motions of two screens which, in Fig. 30, are shown at 249, 251.

Fig. 31 which is taken, as was mentioned, cross-sectionally along line 31-31 in Fig. 28, shows the interconnections between the various components which rise
10 towards the ridge structure on the left side of Fig. 28, and illustrates a large collection of the same kind of relative motion interconnect structures previously described hereinabove. In addition, Fig. 31 offers a clear illustration of the defining operative boundary between non-moving roof structure, shown generally at 253 in Fig. 31, and slidably moveable roof structure shown at 255 in Fig. 31, all relative to previously-
15 mentioned rafter 118.

Looking again for a moment to Fig. 31, indicated generally at 257 is an extrusion-molded component prepared in accordance with the present invention which acts as a way or guide for sliding movement of sliding roof structure 255. Pictured at 259 in Fig. 31 is an optional elongate internal reinforcing stiffener,
20 preferably made of a suitable metal material, fitted within a region in rafter 118.

Returning for a moment to previously-mentioned lines 248, 250, these lines extend toward adjustable connector structures, pictured in two different appropriately usable forms in Figs. 32, 33 especially for line 248. As can be seen from looking at Figs. 32, 33, one can discern how it is possible to adjust the anchored outer ends of
25 lines 248, 250 relative to the associated moving roof panel structures.

Turning attention now briefly to Figs. 34, 35, here illustrated fragmentarily in cross-sectional elevation and plan views, respectively, and looking generally into the region underlying floor structure 104, is what is referred to herein as water reservoir structure including water-containing bladders 256, 258. These bladders are
30 appropriately fit into suitable accommodating spaces provided effectively either

within or underneath floor structure 104, and appropriate routed interconnect plumbing for these bladders is generally pictured at 260 in Fig. 35.

The exact constructions, configurations, locations and interconnections provided for such a water reservoir structure are, in their various possible details, no specific part of the present invention, can be constructed and rendered in a number of different ways at the choice of a building designer and in relation to a specific application, and accordingly, need not be, and are not, discussed in detail herein. Suffice it to say that such a water reservoir structure creates the opportunity to have a large volume of contained water located in a building, such as building 100, adjacent the floor and foundation in the building to function for various different purposes. Mentioned earlier herein are three of these purposes. One of them is to provide a water reservoir system which can couple through suitable appropriate fluid conduits that are extended within the confines of the building components of this system toward overhead plumbing, such as that which is pictured in Fig. 24 at 236, to furnish an integrated fire-suppression system. Another use is to furnish such a system through which appropriate heated pipes can be conducted to utilize stored water as a heat sink for the purpose of controlling environmental temperature within the confines of a building like building 100. Yet a further purpose is associated with furnishing substantial weight in an overall building structure to help anchor it against catastrophic motion relative to the underlying ground in a circumstance, for example, of a severe storm or a condition such as a hurricane or tornado, and especially with respect to a building which is supported on top of the ground, and without the presence of any ground-penetrating foundation structure, such as the ground-penetrating foundation structure 102 that has been discussed so far herein.

Figs. 36-39, inclusive, illustrate other kinds of appropriate foundation structures, including a pair of such foundation structures with respect to which the weighting possibilities of a water reservoir system may be especially useful.

Fig. 36 illustrates a non-ground penetrating and substantially ground-resting foundation structure 270 which is shown resting directly on the upper surface of ground 124.

Figs. 43 and 44 illustrate in elevational-section and plan-section views, respectively, fragments of modified portions of a building structure wherein motion structure is provided within an upright wall panel structure. The motorized portion of such a modification is pointed to generally at 278 in Fig. 43. Fig. 44 shows yet another type of elongate extrusion molded polymer plastic component 280 which is formed in accordance with the present invention, and is snap fit into place in the region intermediate a pair of upright wall panel structures to provide connection channels 280a, 280b, wherein appropriate guides or slide-accommodating tracks, for

example, moveable screens can be driven by the motorized structure pictured at 278 in Fig. 43.

Fig. 45 illustrates in fragmentary cross section how several kinds of specifically cross-sectionally configured members constructed in accordance with this invention can be used to receive specially formed exterior building skin structure 5 made in panels, such as the panels shown generally at 290 in Fig. 45.

Figs. 46, 47 illustrate the use of molded interconnect structures formed in accordance with the present invention adapted to receive, at different locations within a building such as building 100, conventional wall material, such as sheetrock material generally pictured at 292, 294 in Figs. 46, 47 respectively.

Fig. 48 is a fragmentary section taken in the region where two wall panel structures, for example, are joined through interconnect structure of the type described earlier herein, on the outside of which there are provided structural- tape- attached sheets of conventional sheetrock or wallboard, pictured at 296 in Fig. 48.

15 Figs. 50a, 50b illustrate, in different drawing scales, constructions of extrusion molded spanning panel structures that can be formed in accordance with the present invention, and Figs. 51, 49, in conjunction with these two other figures, picture how an overall panel structure including opposite facial spaced skin structures can be created.

Fig. 52 is a fragmentary view of a novel power-supplying cable bundle proposed for incorporation into a building in accordance with the present invention. In this bundle, there is provided but one single neutral line, one single ground line, and an appropriate plurality of higher-voltage lines.

It should now be apparent that a novel modular building system is proposed and has been illustrated and described with respect to the present invention. All of the important structural and other features offered by this system have been discussed very fully earlier in this specification, and are clearly contributions to the relevant art which promote the constructing of very versatile, easily and quickly installed, highly-efficient building structures.

at least certain ones of said interconnect structures, when (1) in operative conditions interconnecting adjacent building components that are distributed substantially throughout such an overall building, and (2) when responding to the influence of ambient temperature change, and/or to an externally applied load, intentionally accommodating limited ranges of relative angular and/or translational motion between such interconnected adjacent components as a specific reaction to such a change and/or load, with such relative motion occurring within such ranges, and being characterized (1) by dwell periods of load-transmission between different pairs of adjacent interconnected components, (2) by changes in actual relative positions between interconnected elements as a whole, and (3) by effective, reversible, bidirectional enlargement and shrinking of the building as a whole.

2. A modular building system comprising plural, interconnectable, modular building components, and interconnect structures, including relative-motion-accommodating interconnect structures, operatively interconnecting selected ones of said building components into a ground-supported, overall building which can be characterized as a matrix of space-defining, potentially load-bearing components,
5 said relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to externally applied loads, and via the relative- motion accommodation accorded to selected, interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground,
10 said interconnect structures creating such differing paths in direct relation to the type, level and direction of externally applied loads, and so as to establish each such created path through a specific collection of building components and interconnect structures that are distributed between the point of load application and the ground, and between which, along said path, relative motion in response to a load has come to a stop.

3. A modular building system comprising
building components organized to form a ground-supported, overall building,
and

5 interconnect structures operatively associated with, and interconnecting, said
building components, operable, with the application of an external load, and in direct
response to the specific and instantaneous characteristics of such a load, to create a
related, specific, load-bearing path through the building between the point of load
application and the ground.

10

4. A modular building system comprising
building components organized to form an overall building, at least some of
which components are intended to carry (through the building) loads that are related
to different externally applied loads, and

15 interconnect structures operatively interconnecting said components, and
capable of defining variably, and for different specific externally applied loads, which
ones of said components will form parts in a reaction, load-bearing path between the
point of external load application and the ground,

20 said interconnect structures thus effectively holding to a minimum the overall
time (during the life of a building) that certain ones of said components and
interconnect structure operate as parts of such a reaction path.

5. The system of claims 1, 2, 3 or 4, wherein at least certain ones of said
25 building components and interconnect structures are relatively positionally
interchangeable in a building.

6. The system of claims 1, 2, 3 or 4, wherein selected ones of said building components and interconnect structures include internal way/chase structure adapted to receive selected utility-carrying structures, such as for water, electricity, gas, heating, waste products, telephone, cable, etc.

5

7. The system of claims 1, 2, 3 or 4, wherein at least certain ones of said building components and interconnect structure include pre-established, integral, interengageable connector elements.

10

8. The system of claims 1, 2, 3 or 4, wherein at least certain ones of said building components and interconnect structures are formed of a polymeric material.

15

9. The system of claim 8, wherein at least some of said at least certain ones of said building components and interconnect structures are formed by extrusion.

20

10. The system of claim 6, wherein, within the confines of selected building components and interconnect structures, utilities are distributed outwardly therefrom generally in a manifold fashion.

25

11. The system of claims 1, 2, 3 or 4, wherein the overall building includes air-flow venturi structure which communicates between the inside and the outside of the building.

18. A modular building system in operative condition comprising
a skeletal frame structure, and
panel structures floatingly connected to said frame structure in such a manner
that the transmission of certain loads between selected ones of said panel structures
5 and said frame structure is adaptive and intermittent, and comes about in direct
response to the nature and direction of an externally applied load.

19. A modular building system, in operative, assembled condition forming
10 an overall building comprising
a freely selected, operatively interconnected arrangement of plural, elongate
frame elements, which elements generally define plural, substantially planar spaces
that are at least partially perimetally bounded by an interconnected plurality of said
elements, each adjacent pair of interconnected frame elements being interconnected
15 in a manner which permits, within preselected bounding ranges, unrestrained overall
relative motion, and

plural, freely selected, generally planar spanner elements floatingly disposed
in generally captured, but nevertheless range-bounded, relatively moveable,
conditions within selected ones of said spaces.

20

20. The system of claim 19, wherein interconnected frame elements, and
captured spanner elements, interact with one another (where connectively adjacent)
through connections which are formed generally by elongate, slidingly and
25 operatively interengaged, elongate, confronting, receptive-channel and received-
flange structures.

26. The system of claims 1, 2, 3 or 4 which further includes ground-engaging foundation structure with elongate stretches possessing vertically adjustable components employable for leveling the foundation structure as a whole.




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : E04B 1/343		A1	(11) International Publication Number: WO 00/68523
			(43) International Publication Date: 16 November 2000 (16.11.00)
(21) International Application Number: PCT/US00/12795		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 10 May 2000 (10.05.00)			
(30) Priority Data: 60/133,306 10 May 1999 (10.05.99) US Not furnished 25 February 2000 (25.02.00) US			
(71)(72) Applicant and Inventor: CROWELL, James, H. [US/US]; 4629 S.W. Lakeview Blvd., Lake Oswego, OR 97035 (US).			
(74) Agents: KOLISCH, J., Pierre et al.; Kolisch Hartwell Dickinson McCormack & Heuser, 520 S.W. Yamhill Street, Suite 200, Portland, OR 97204 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: MODULAR BUILDING SYSTEM

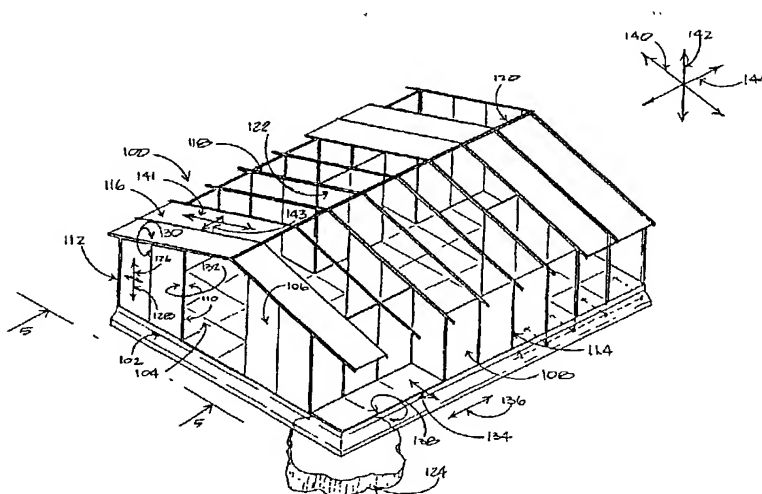

(57) Abstract

A modular building system (100) including preformed extrusion-molded polymeric material (116). Parts include integral connector elements (160, 162) which can be slidably and snappingly reversibly interconnected to form the basic frame (102) and panel structures (108) of an overall building. The interconnected region permits limited ranges of angular as well as translational relative motion between adjacent, connected elements. Parts are assembled simply and quickly in the field, without requiring skilled labor or specialized tools, to form a functionally solid and stable building which responds to loads and temperature changes with yieldable, accommodating deformations that minimize the likelihood of building structural damage, and effectively transmit necessary loads to the ground via load-transfer paths through the building.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

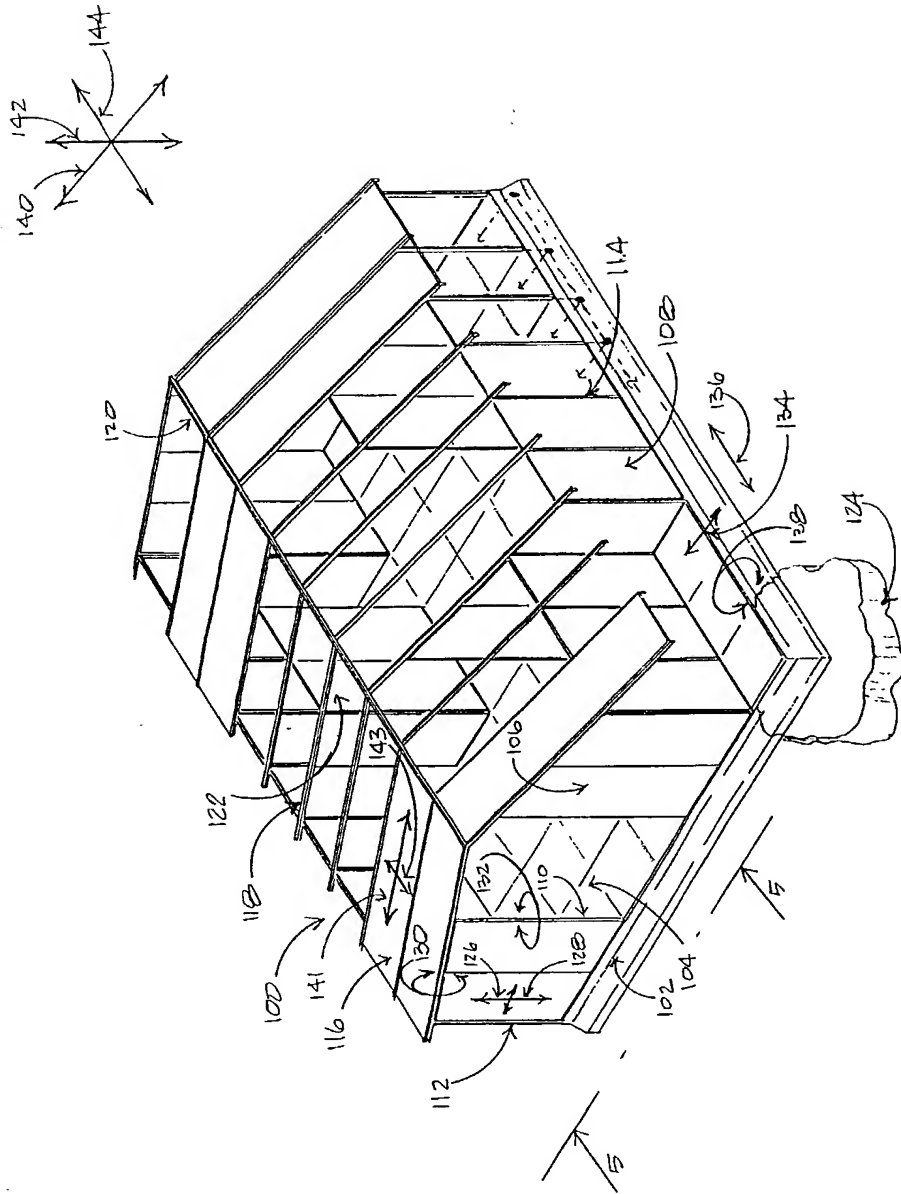
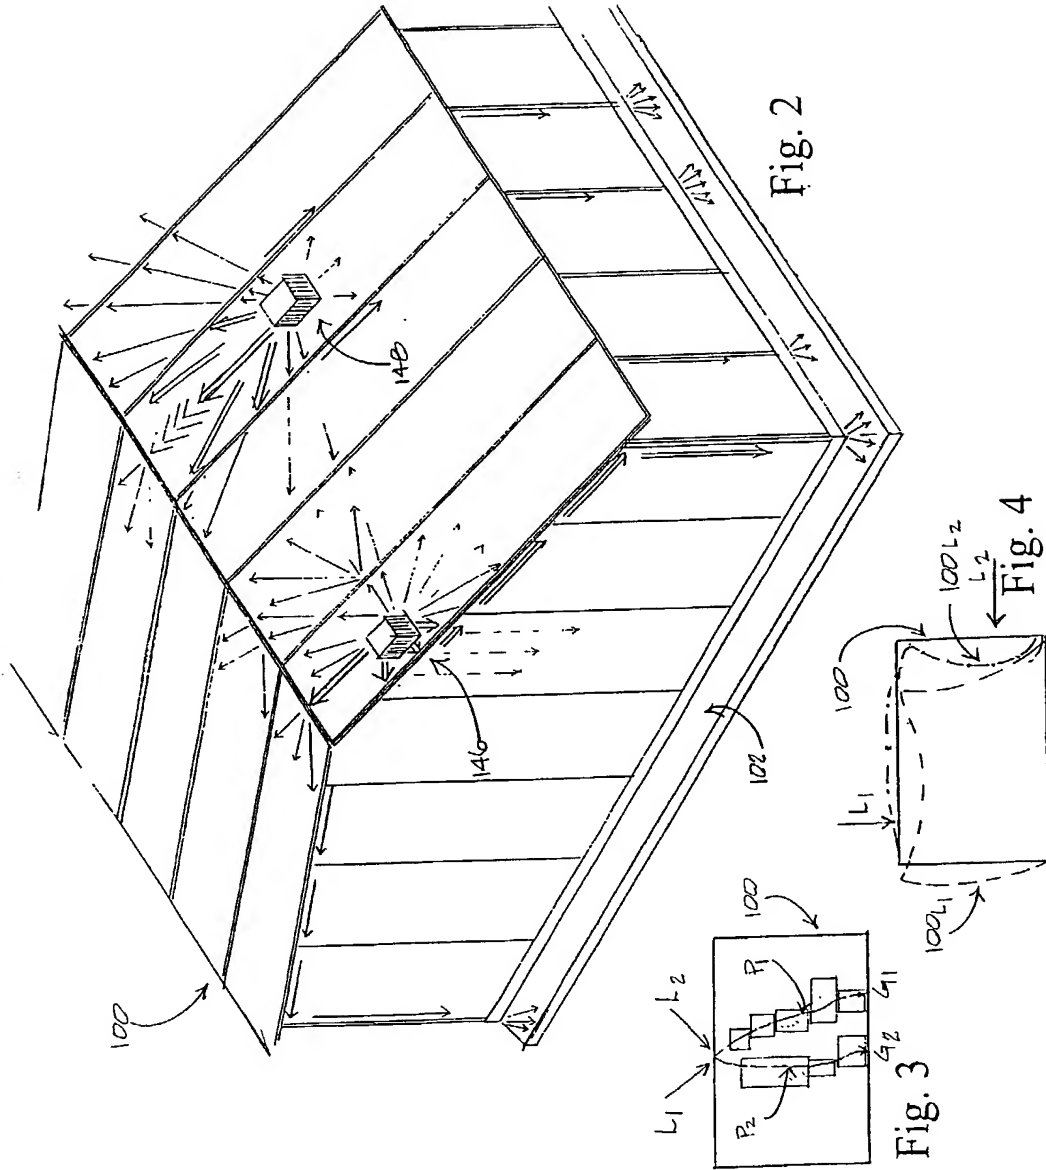


Fig. 1



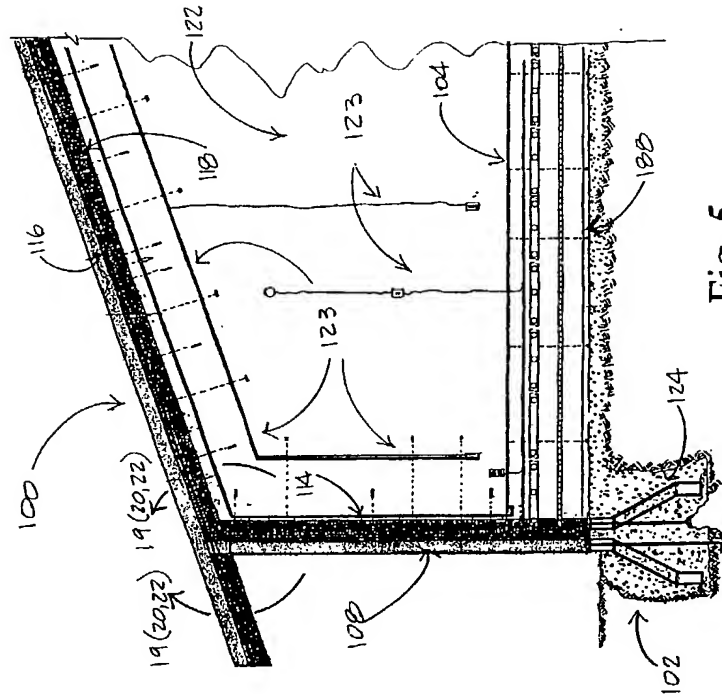


Fig. 5

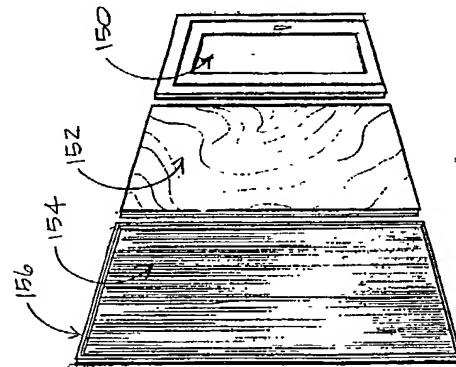
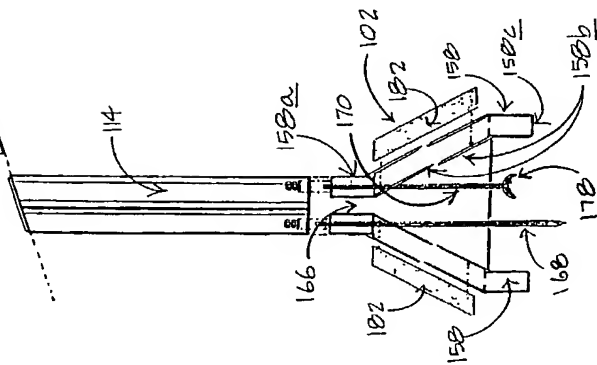
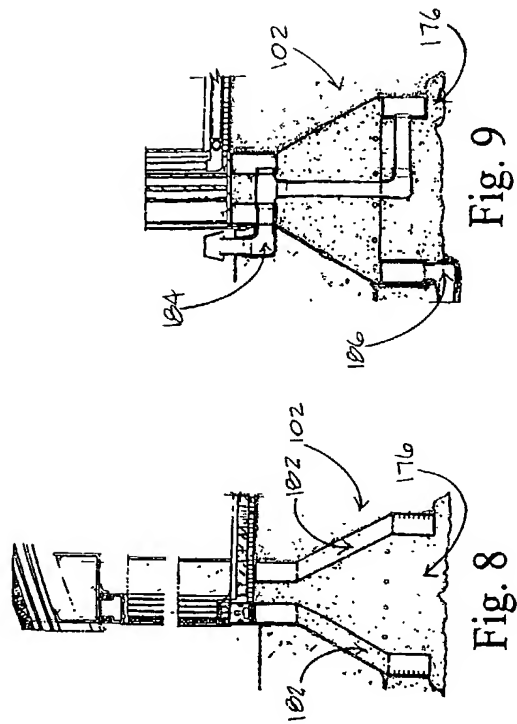
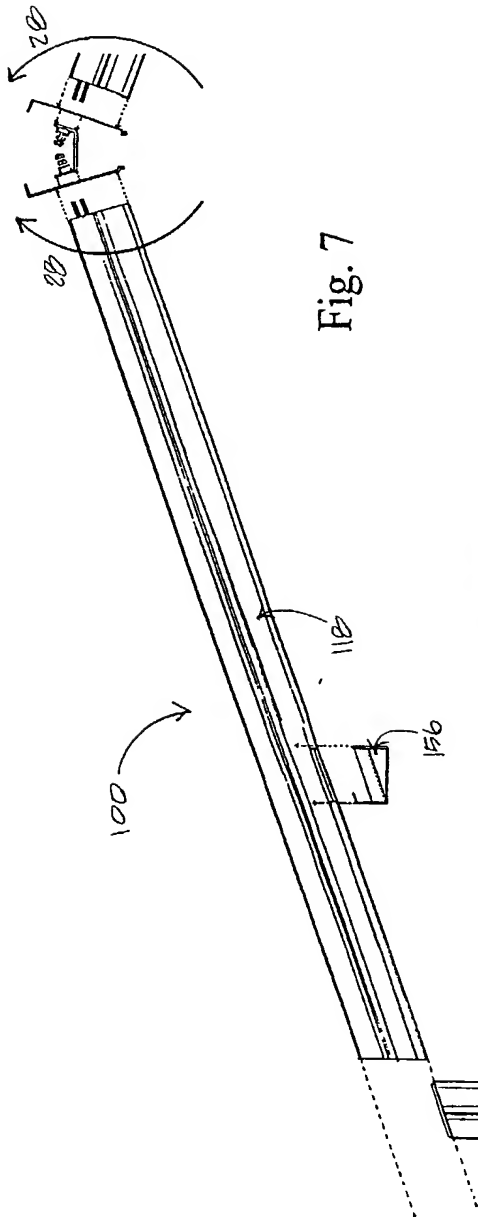


Fig. 6



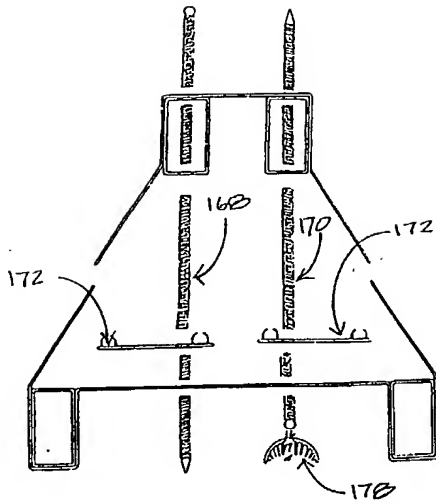


Fig. 10

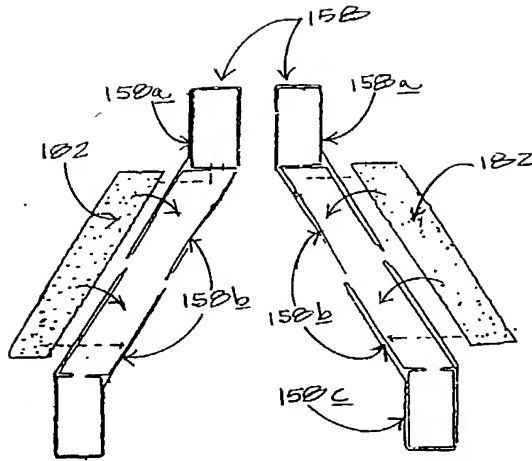


Fig. 11

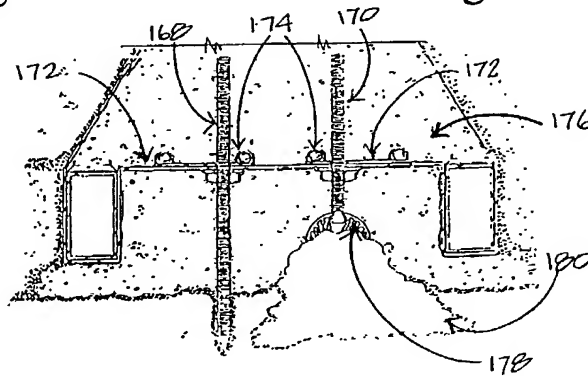


Fig. 12

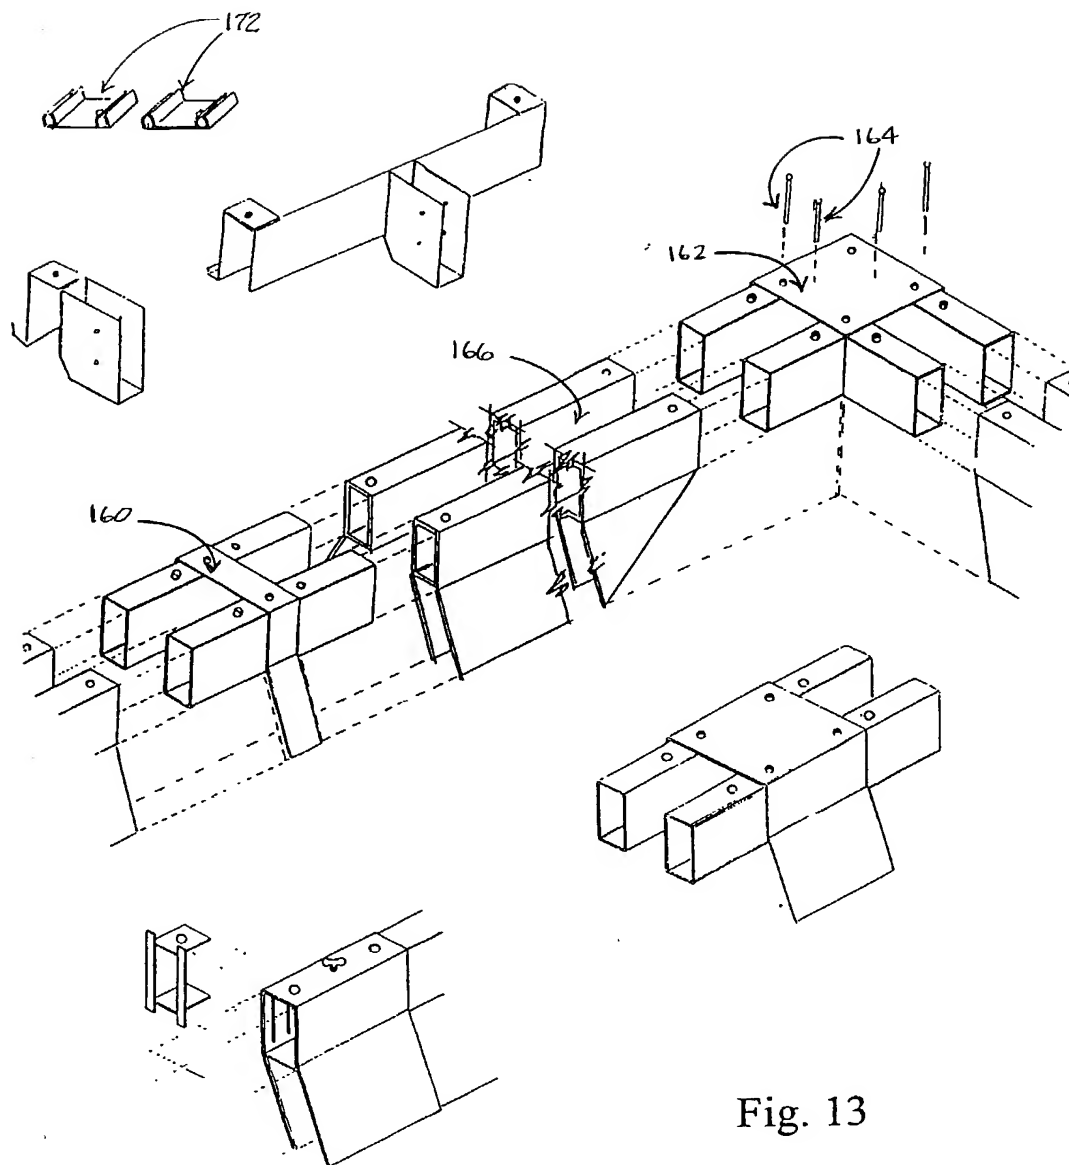


Fig. 13

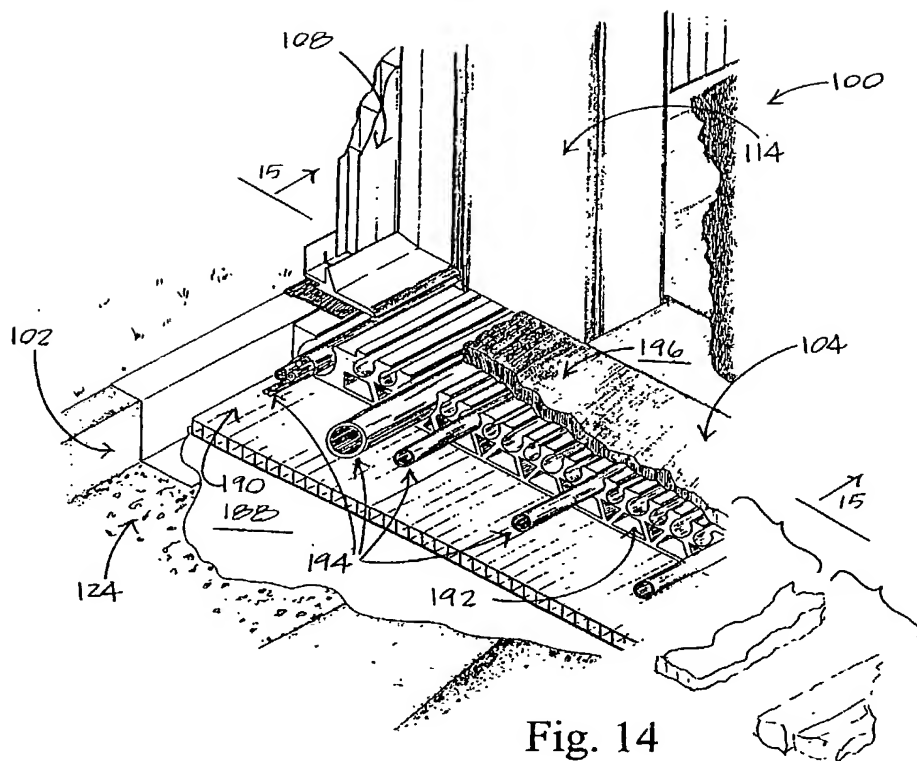


Fig. 14

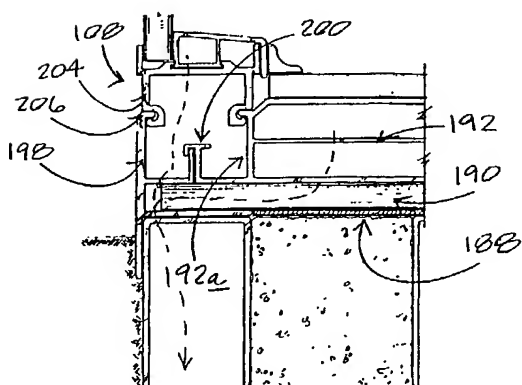


Fig. 15

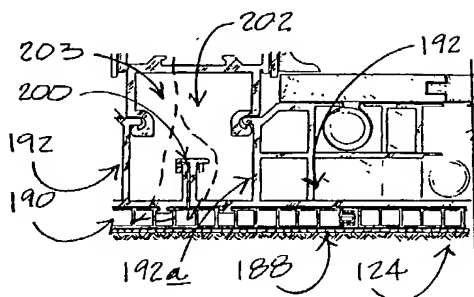


Fig. 16

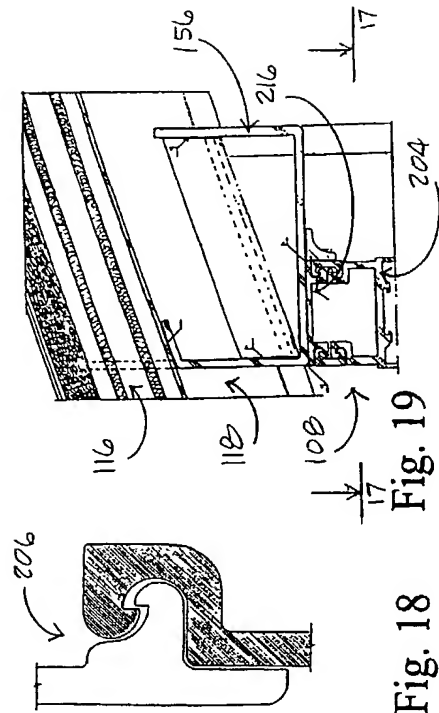


Fig. 18

Fig. 17

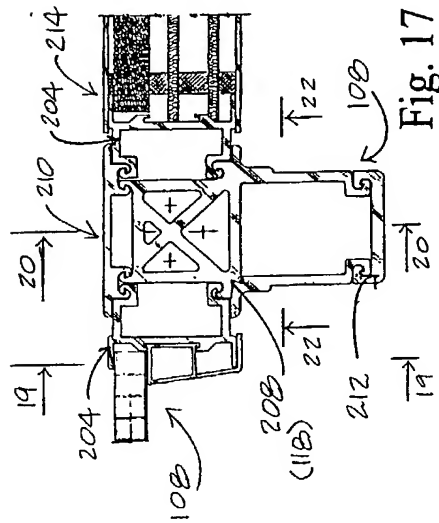


Fig. 19

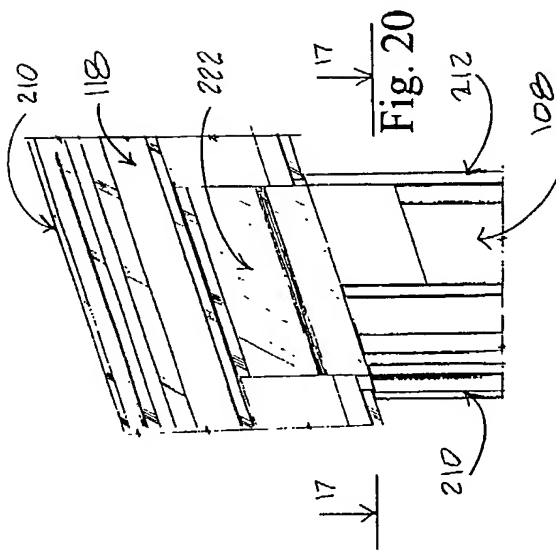


Fig. 20

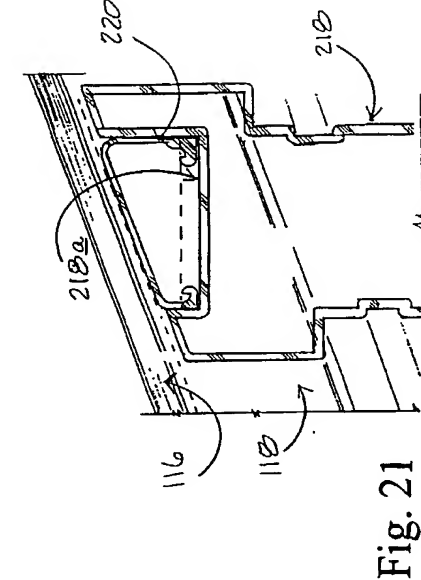
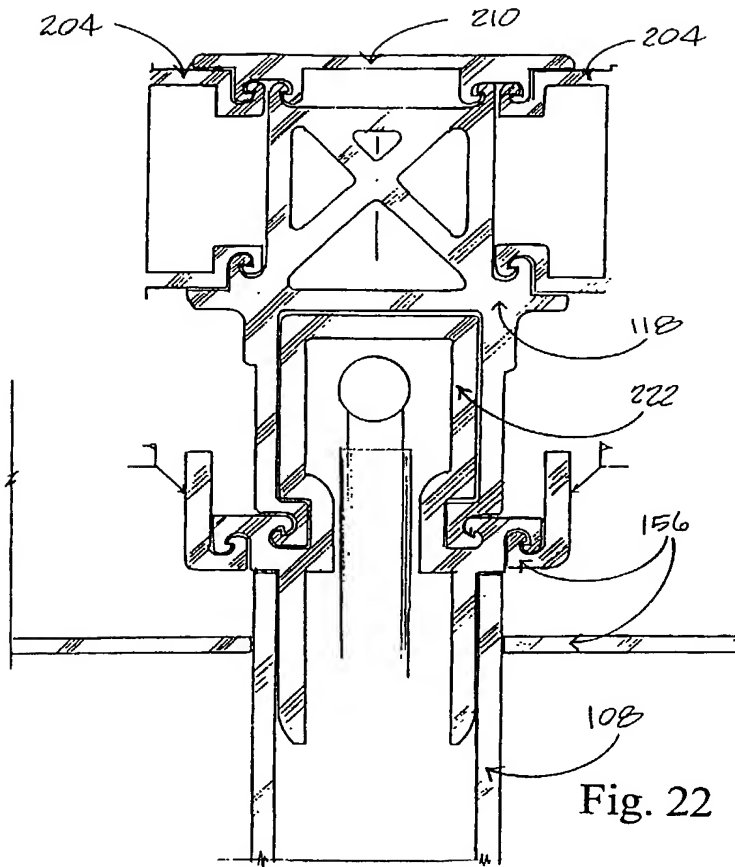


Fig. 21



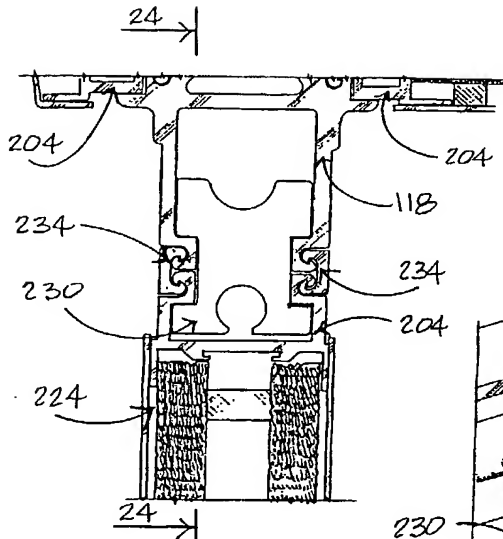


Fig. 23

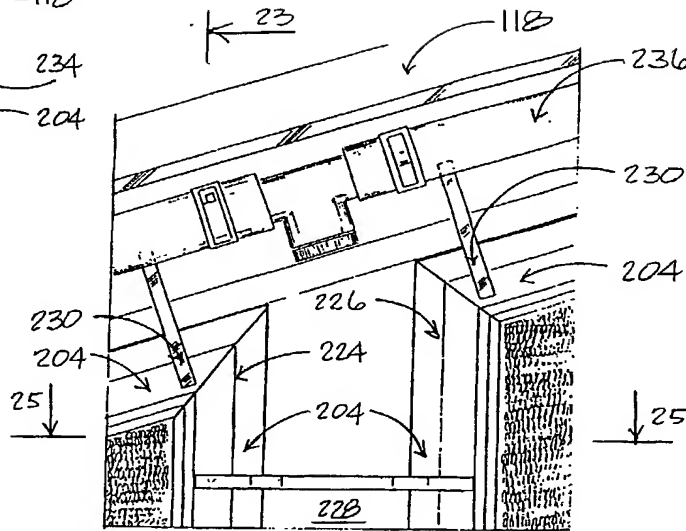


Fig. 24




Fig. 26a



Fig. 26b

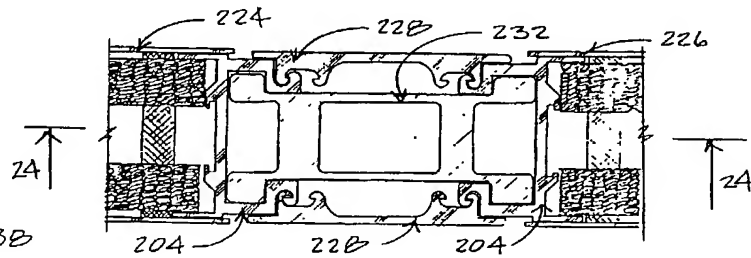


Fig. 25

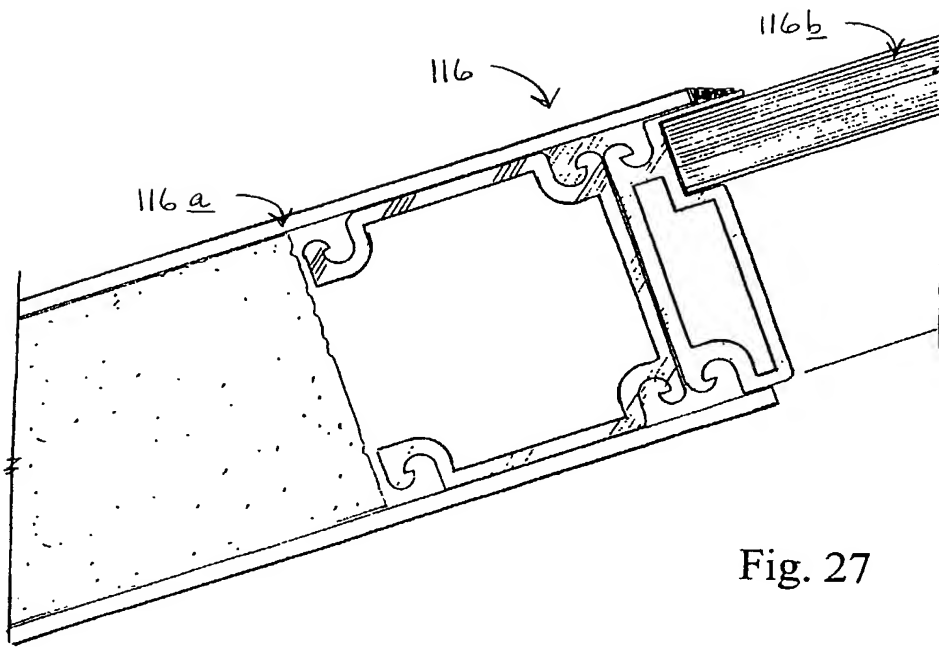

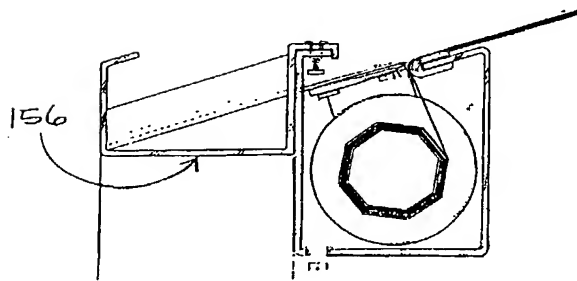
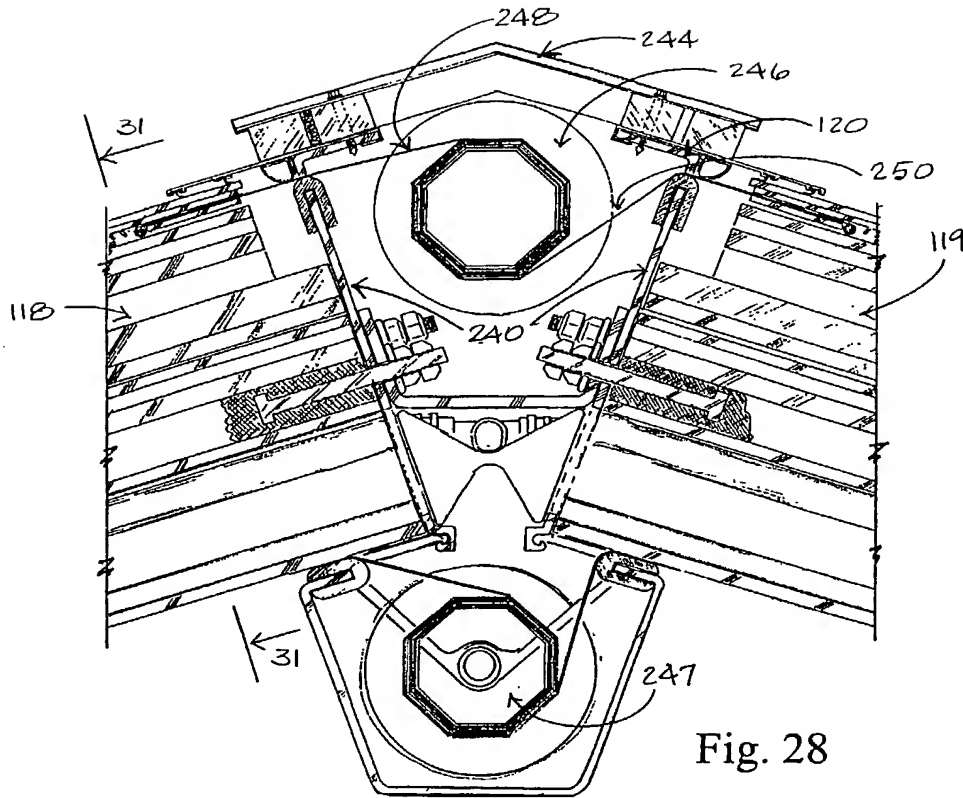


Fig. 27



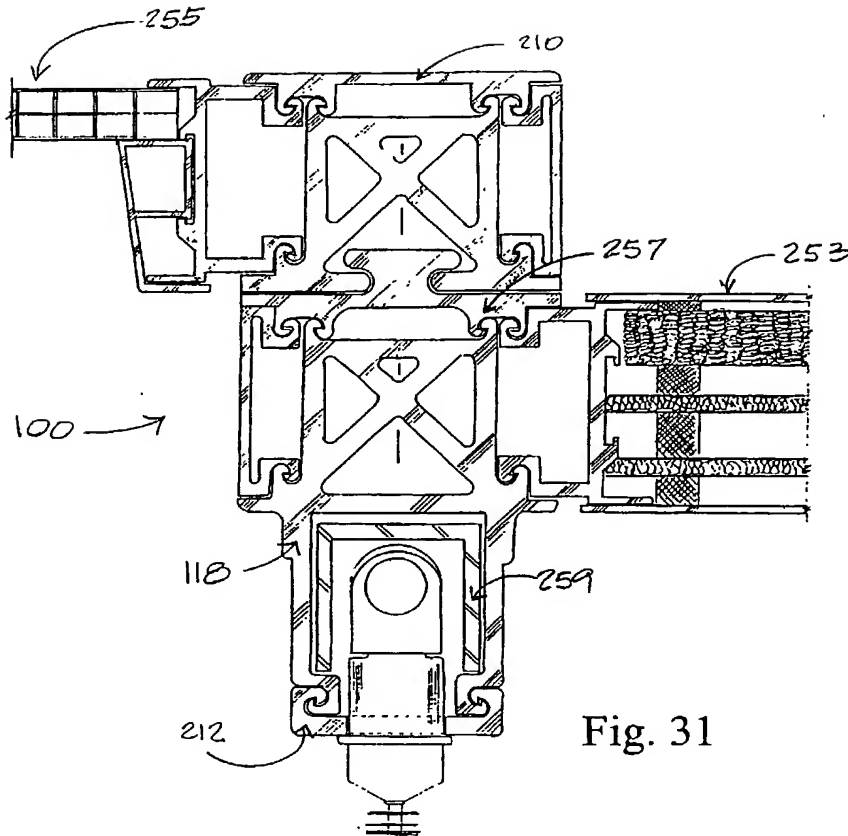


Fig. 31




Fig. 32


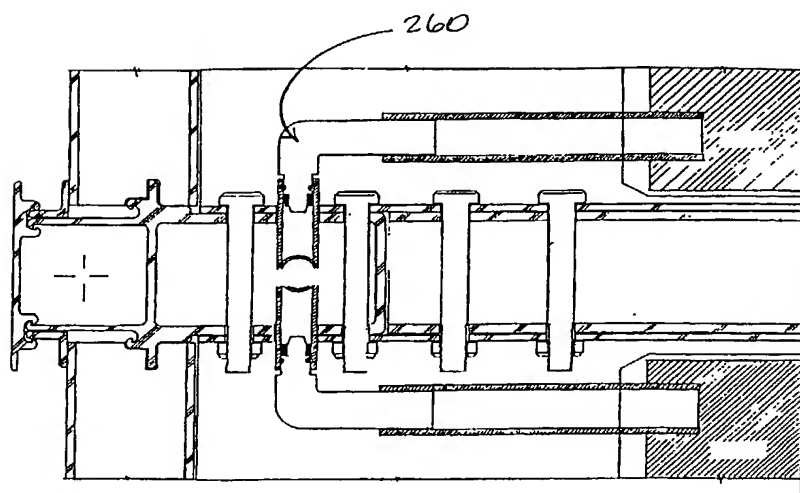
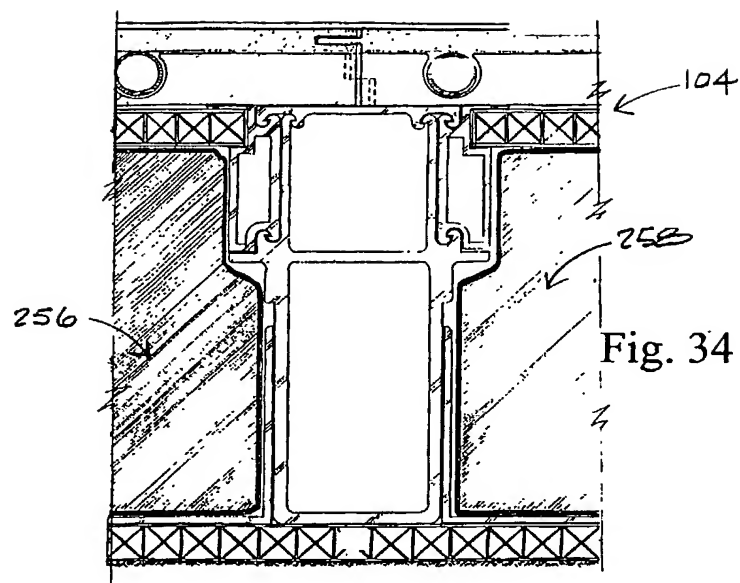


Fig. 33



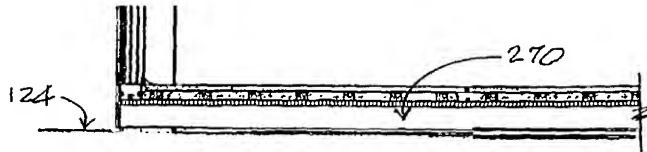


Fig. 36

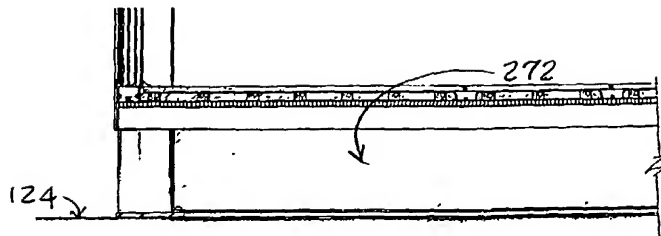


Fig. 37

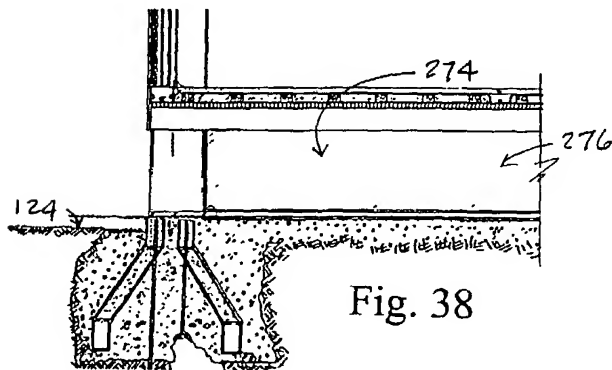


Fig. 38




Fig. 39

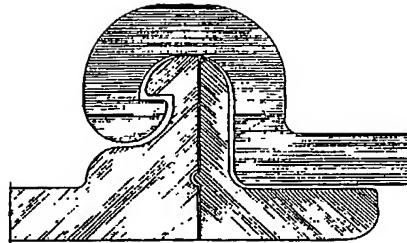


Fig. 42

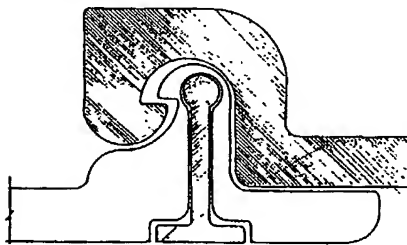


Fig. 41

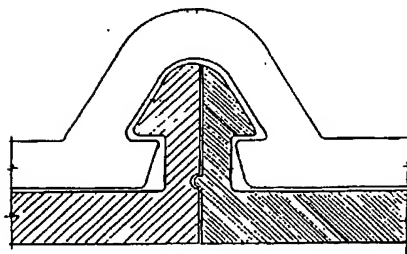


Fig. 40

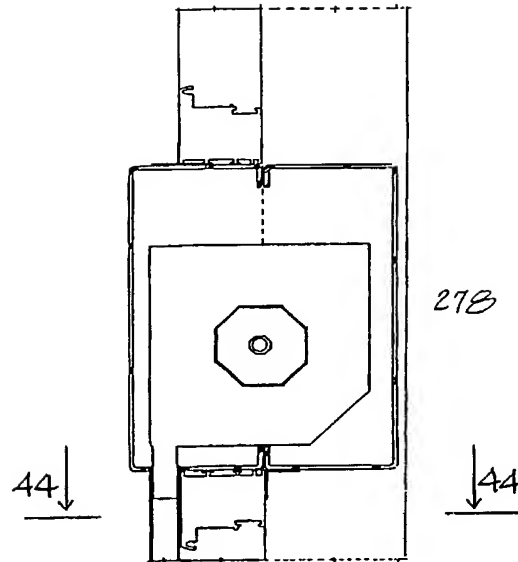


Fig. 43

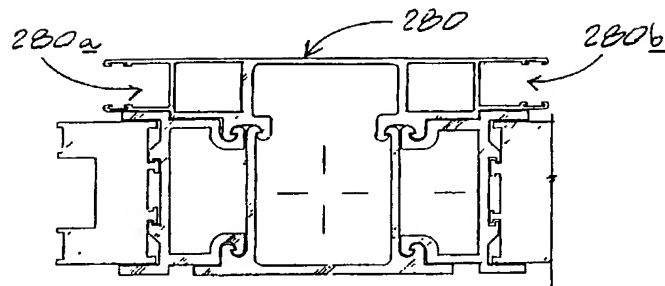


Fig. 44

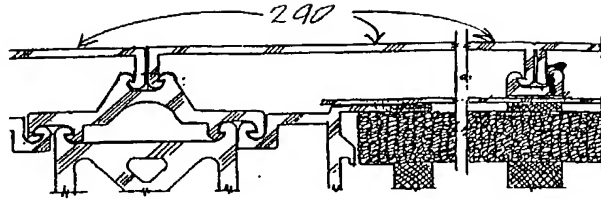


Fig. 45

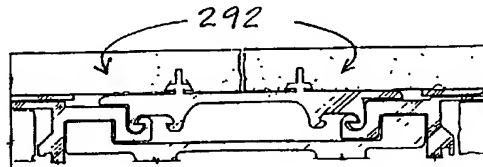


Fig. 46

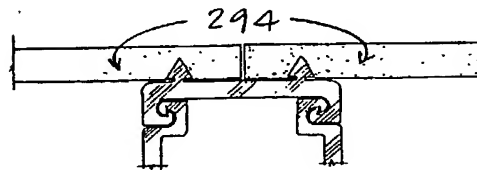


Fig. 47

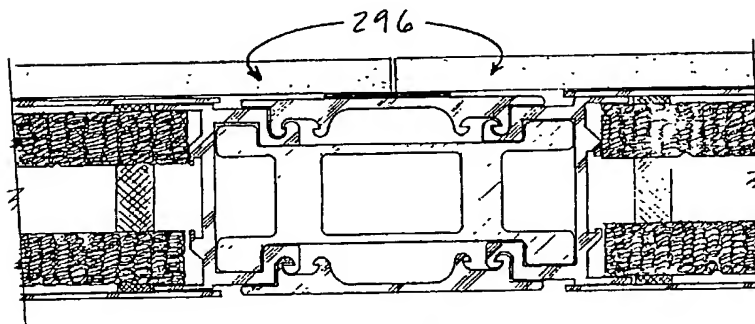


Fig. 48




Fig. 50a




Fig. 50b




Fig. 51

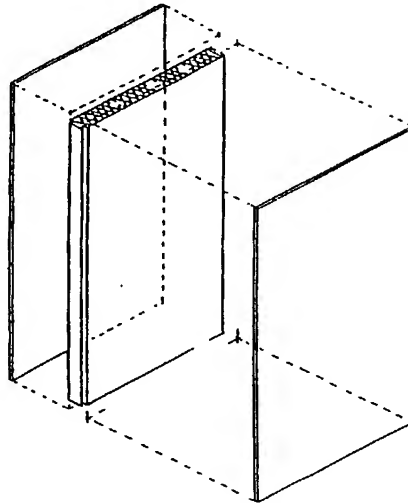



Fig. 49



Fig. 52


WO 00/68523


PCT/US00/12795

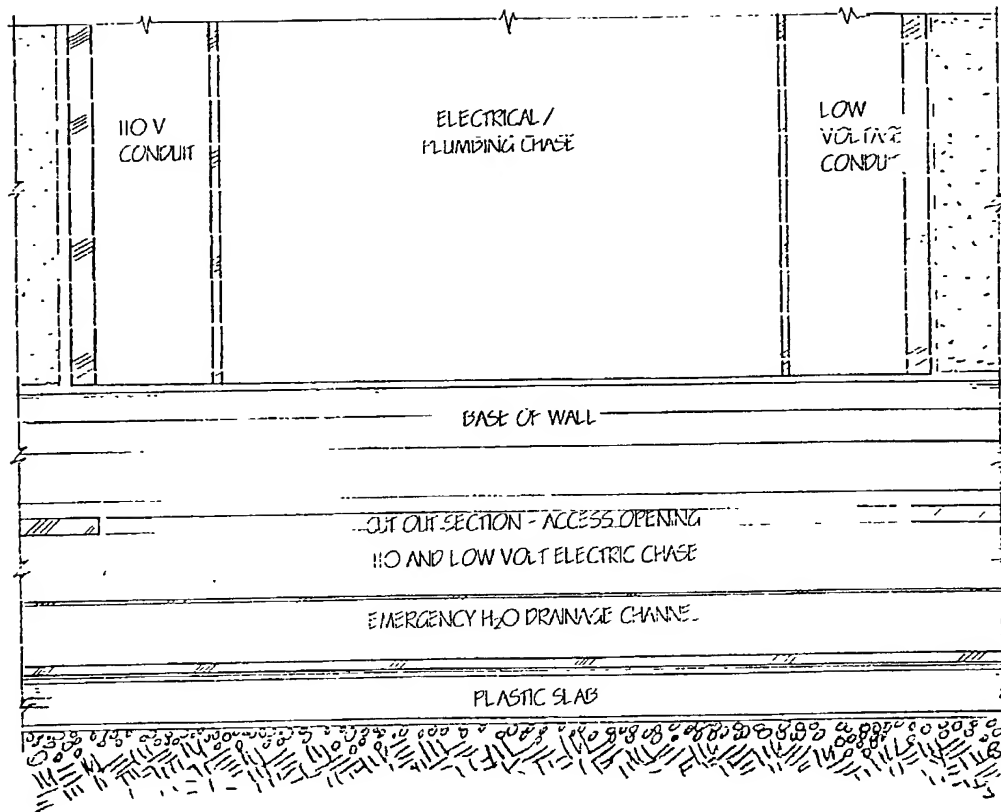

WO 00/68523

PCT/US00/12795

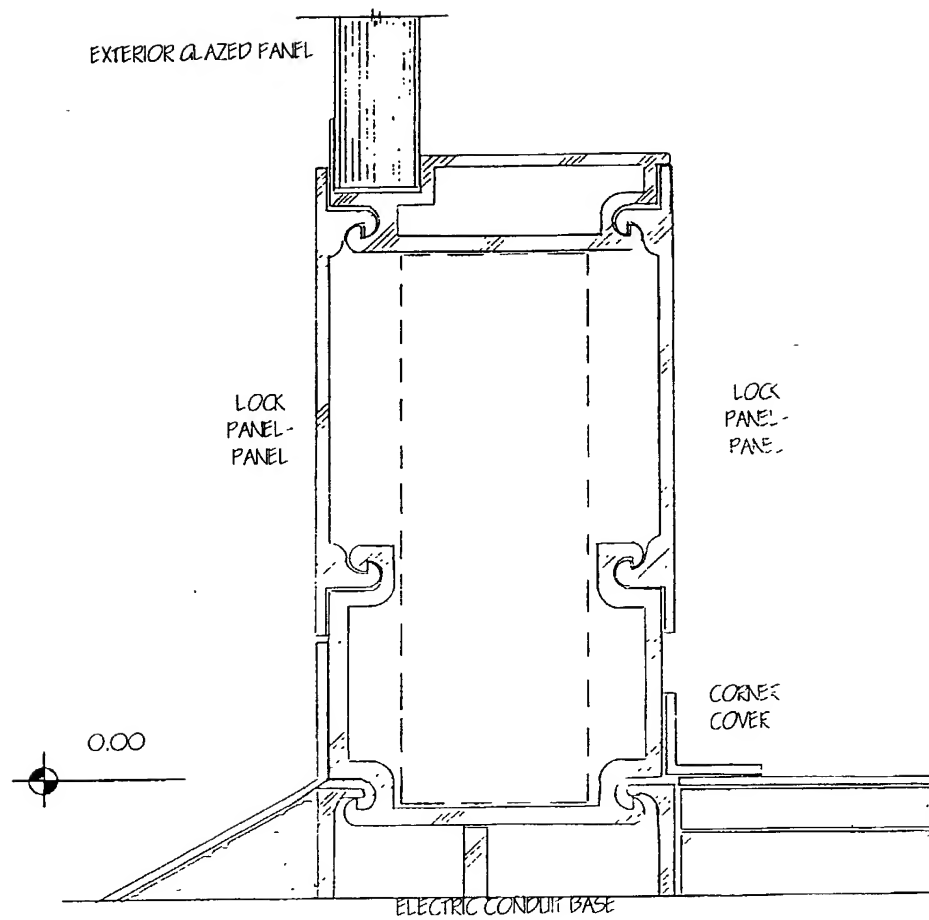


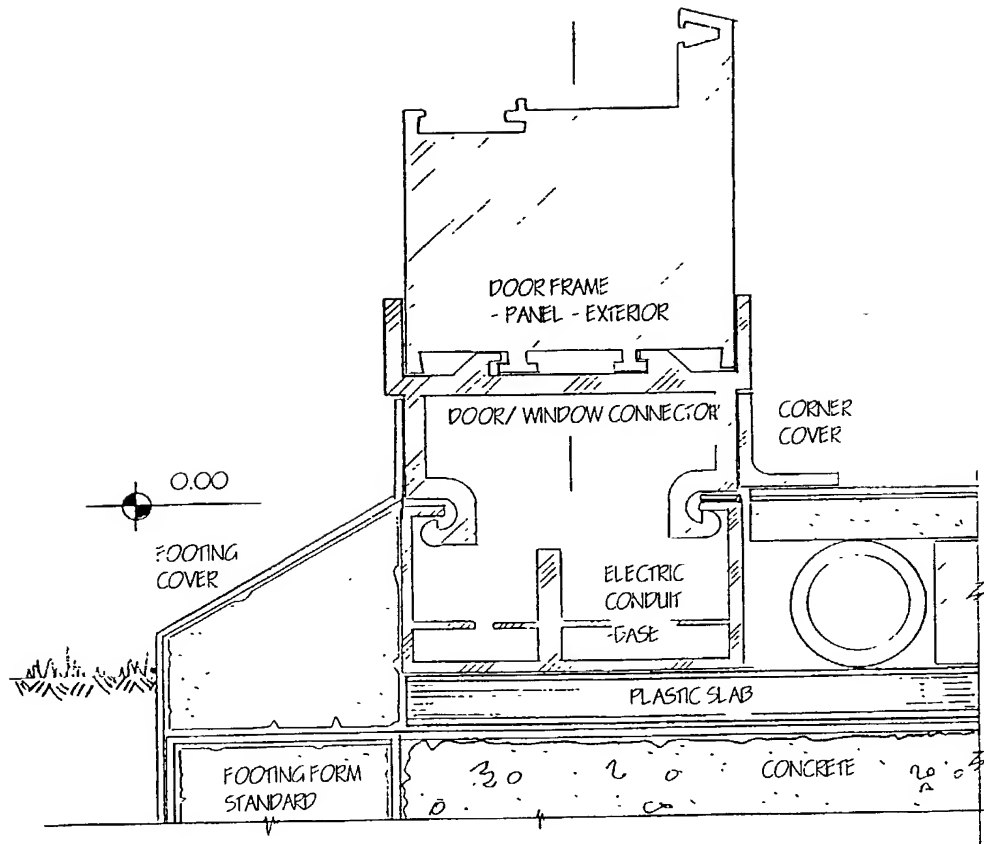

10009369 .060602
10/009369

WO 00/68523


PCT/US00/12795

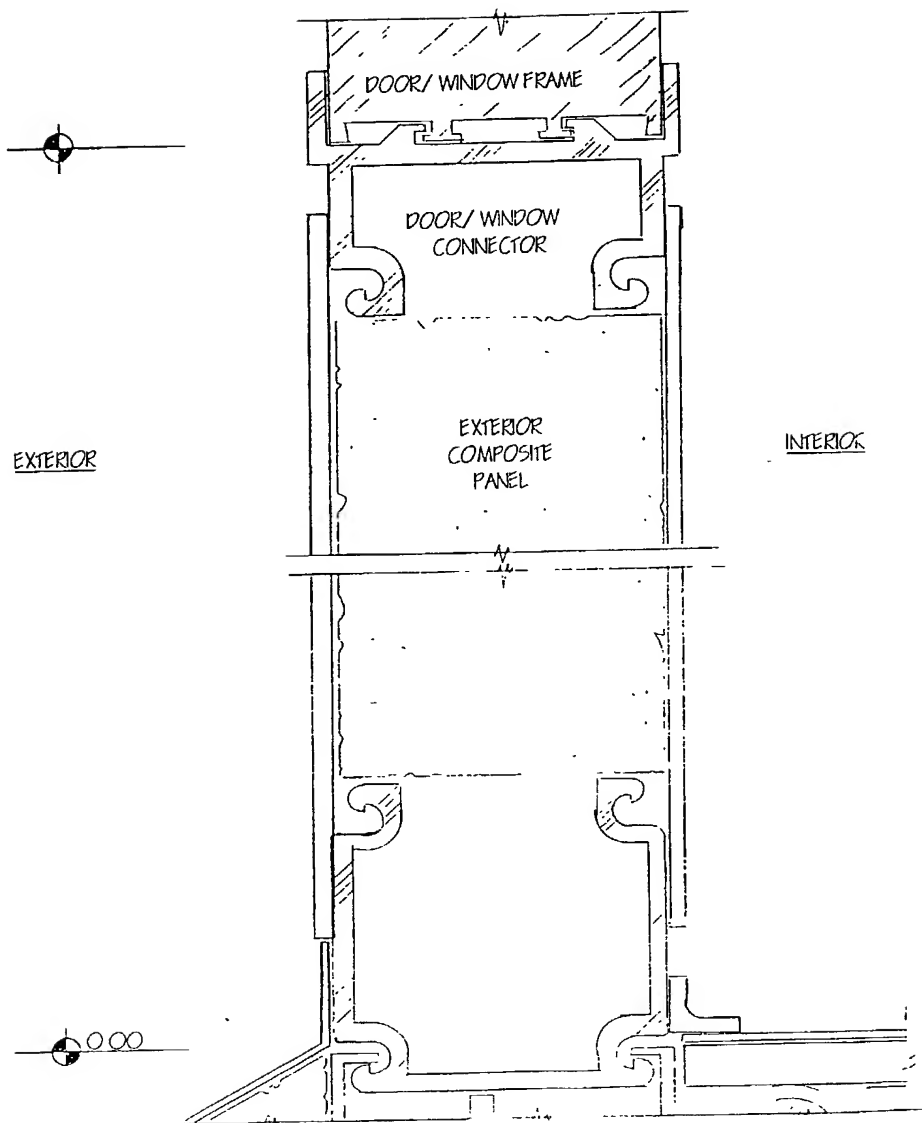


10009369 .060602
10/009369

WO 00/68523

PCT/US00/12795

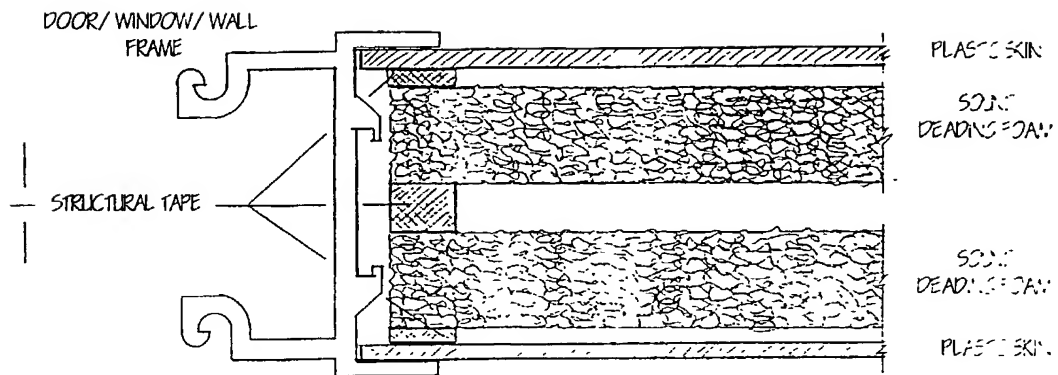

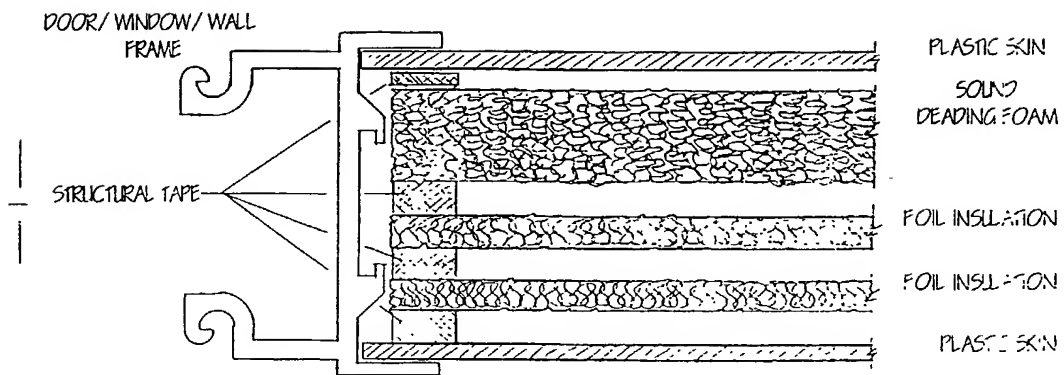



10009369 060602

10/009369

PCT/US00/12795

WO 00/68523

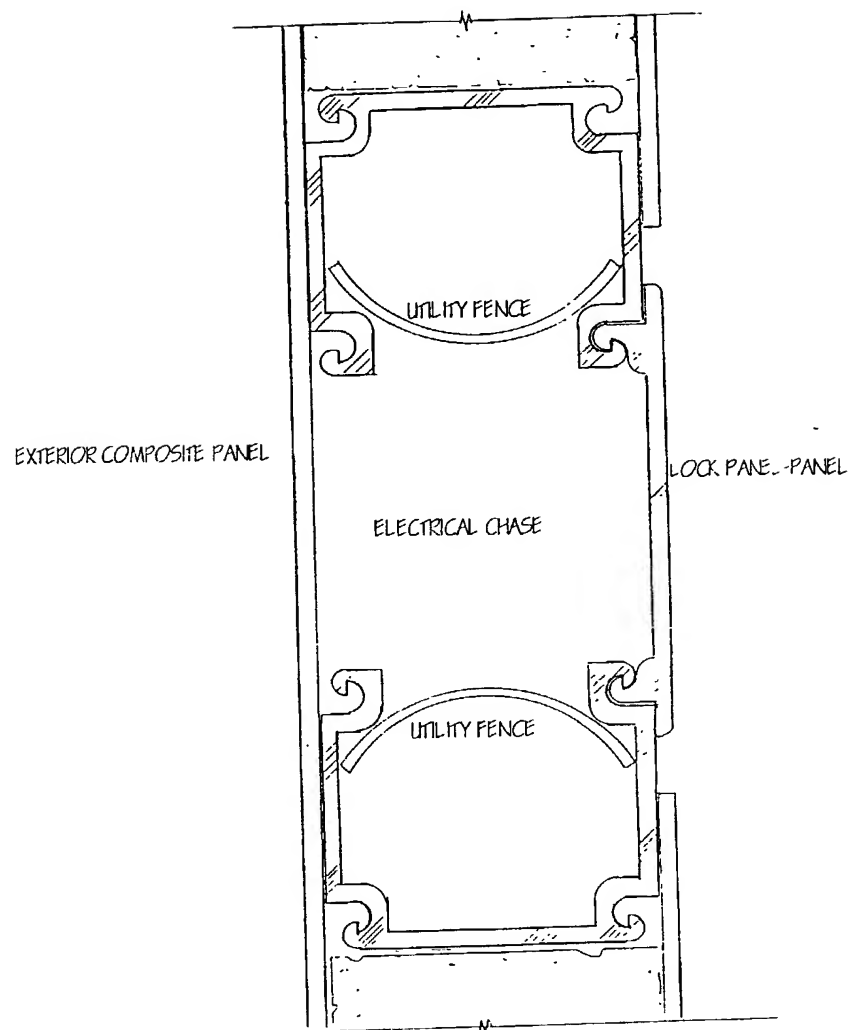


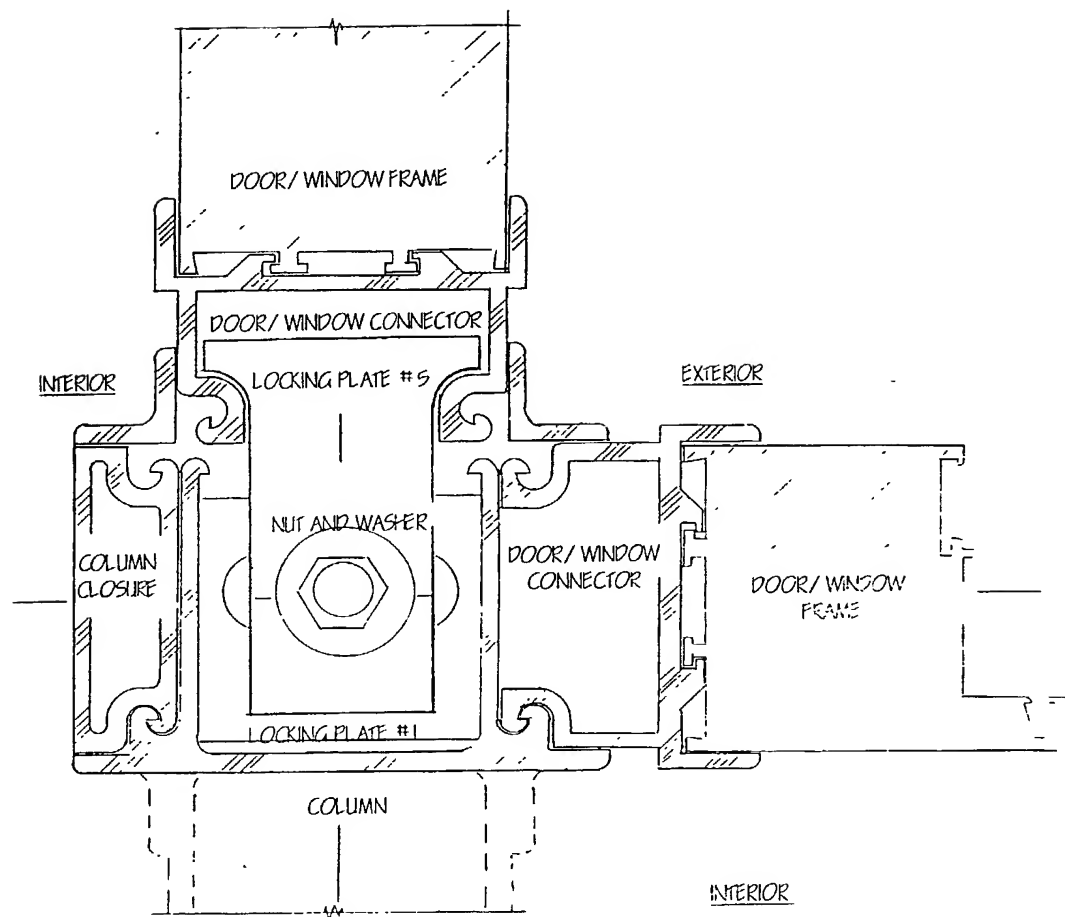

10009369 060602
10/009369

WO 00/68523

PCT/US00/12795

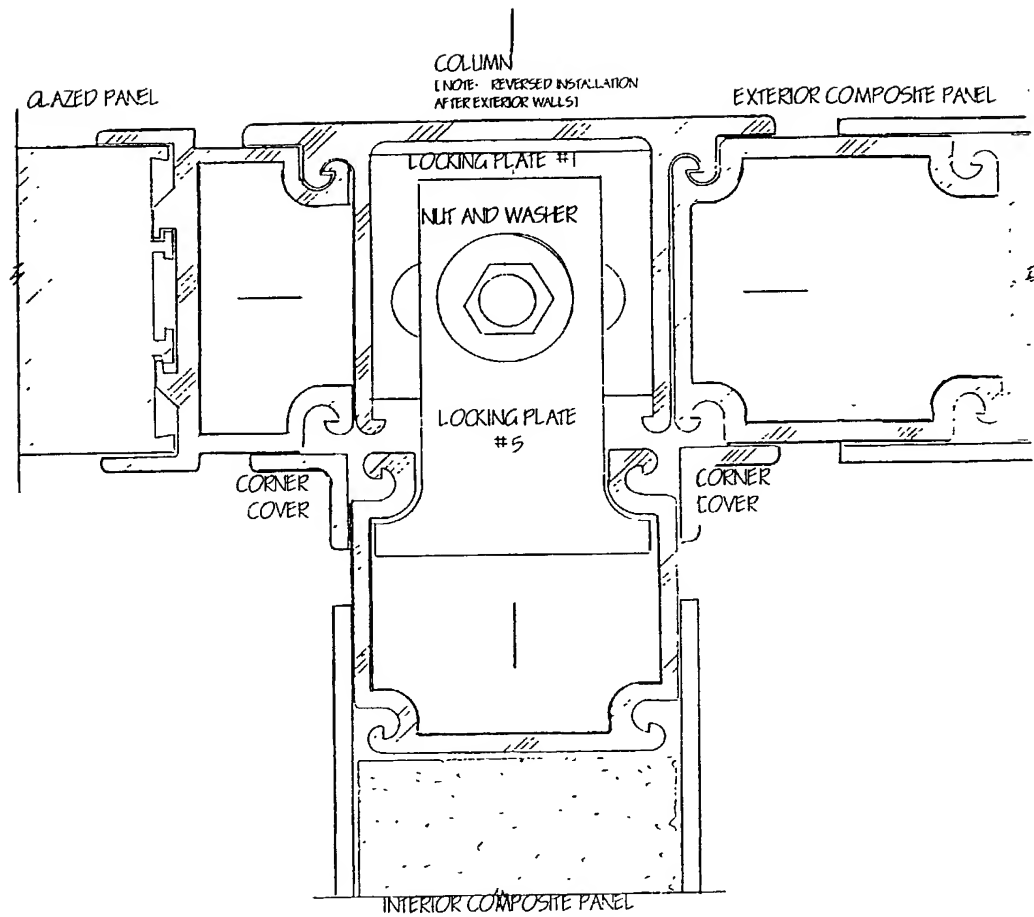



10009369 060602


10/009369

WO 00/68523

PCT/US00/12795

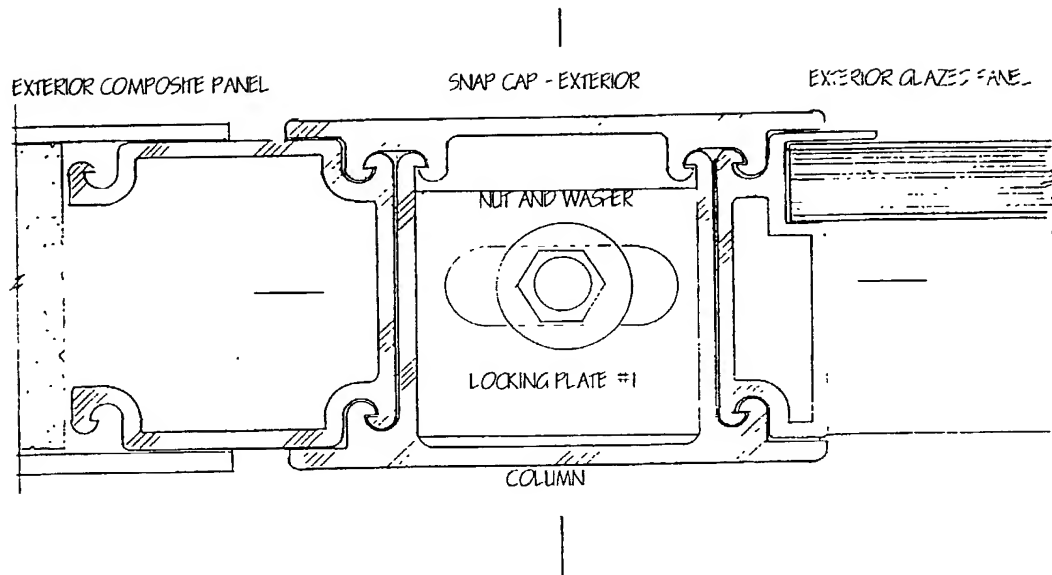


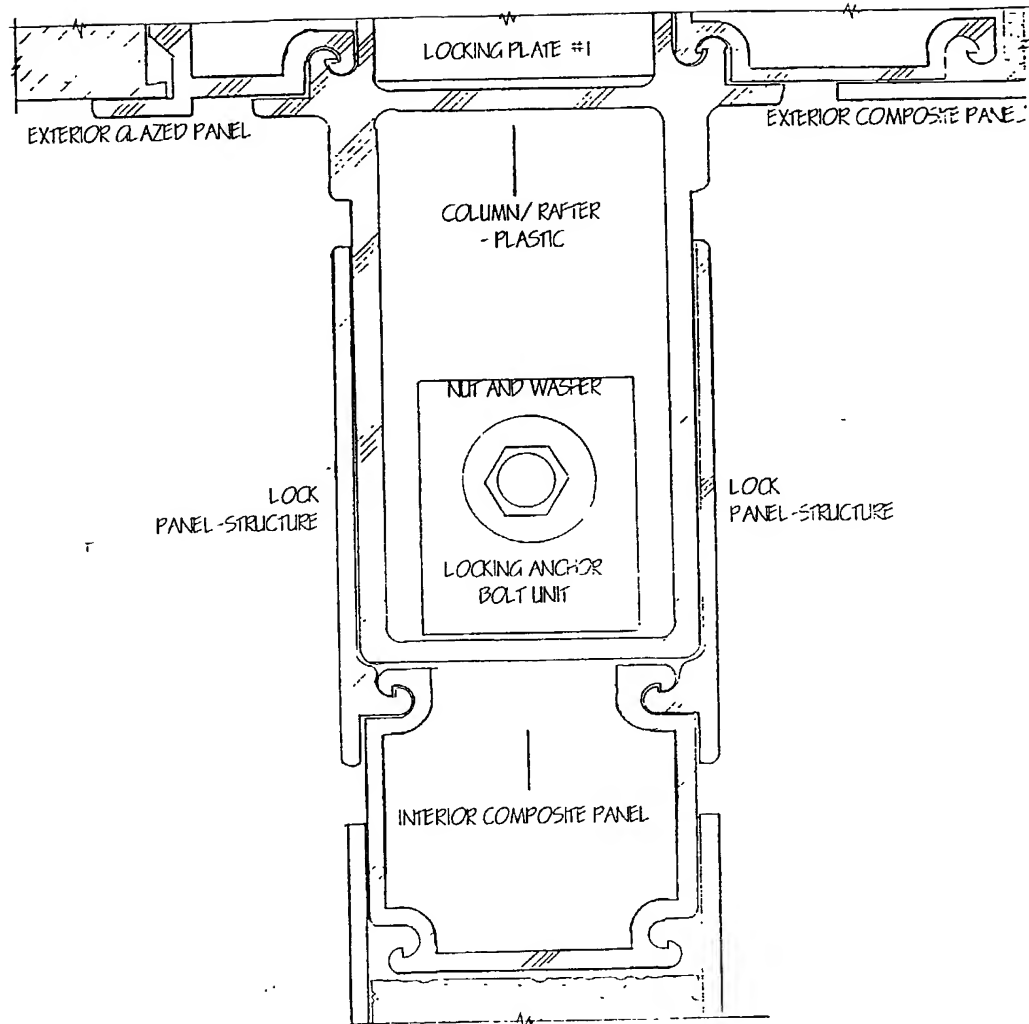


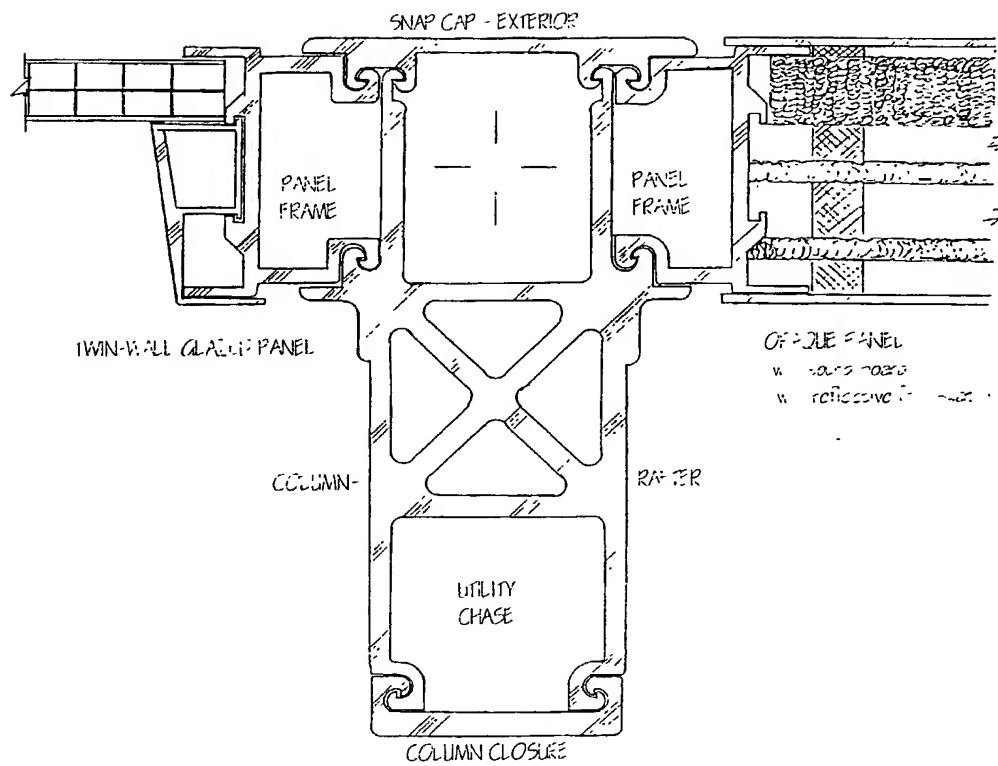

WO 00/68523


PCT/US00/12795

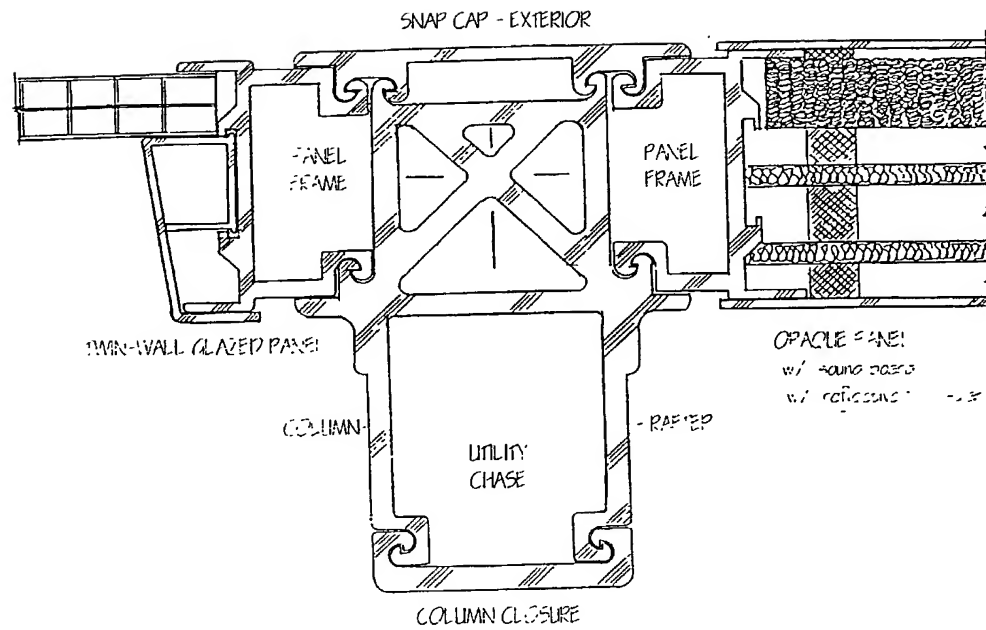


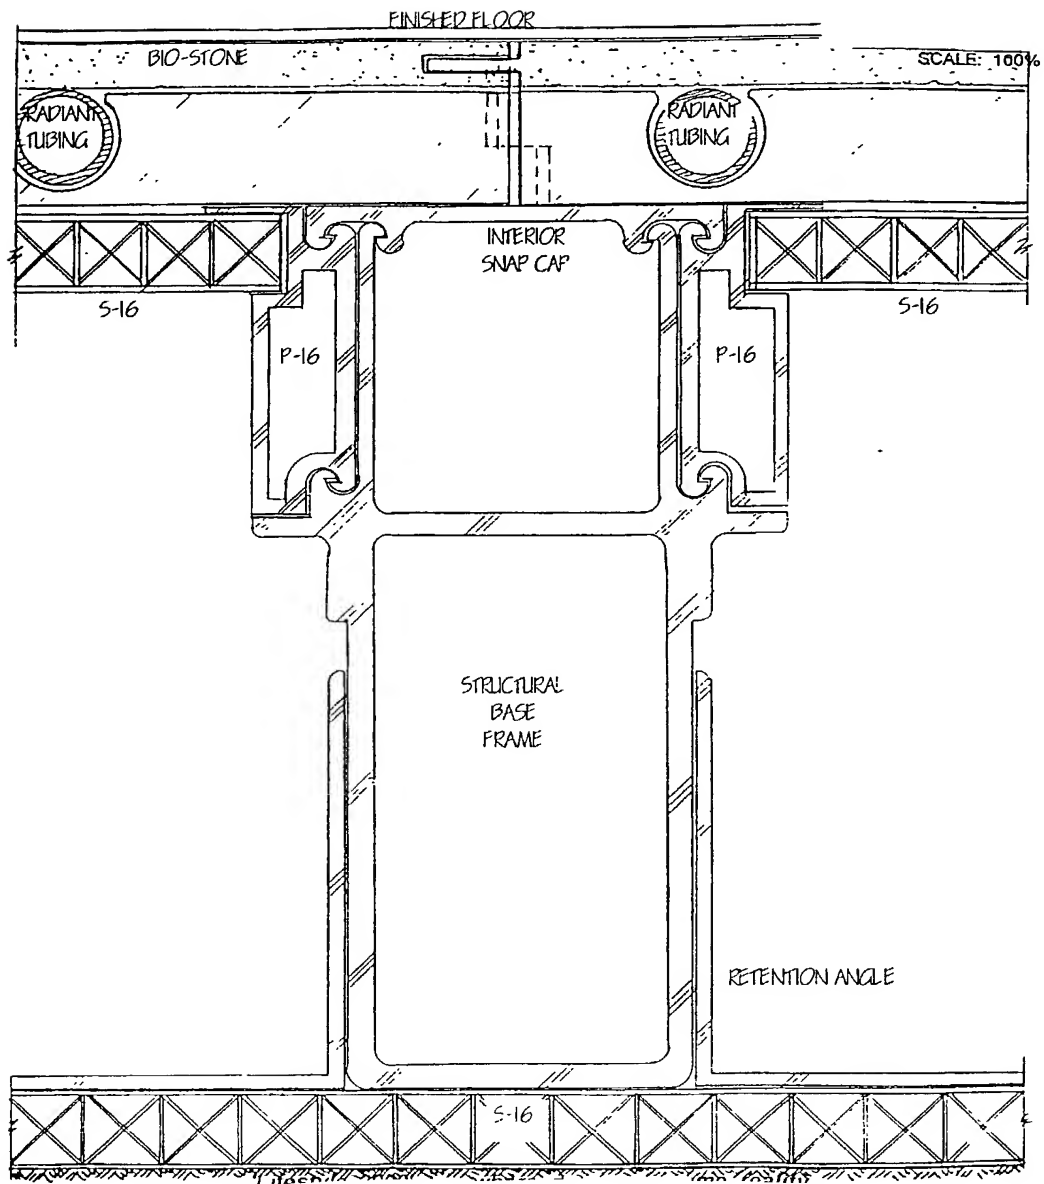



WO 00/68523


10/009369
PCT/US00/12795

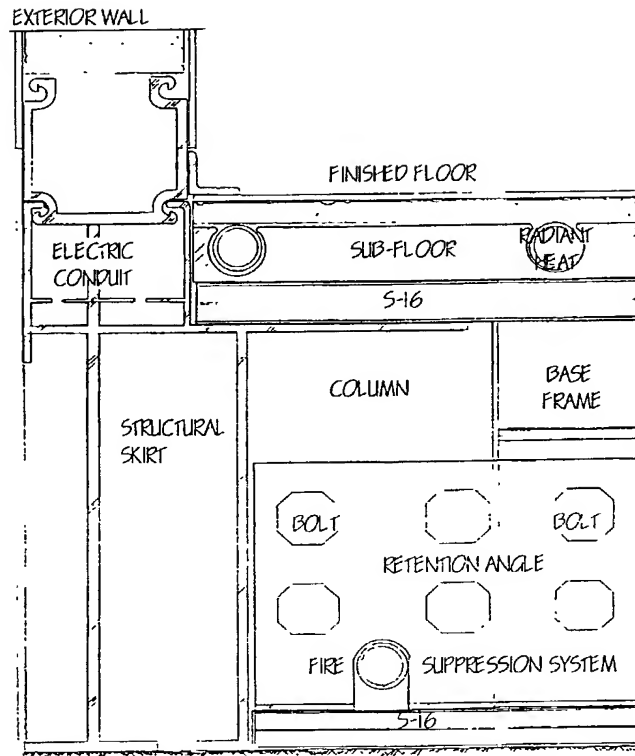

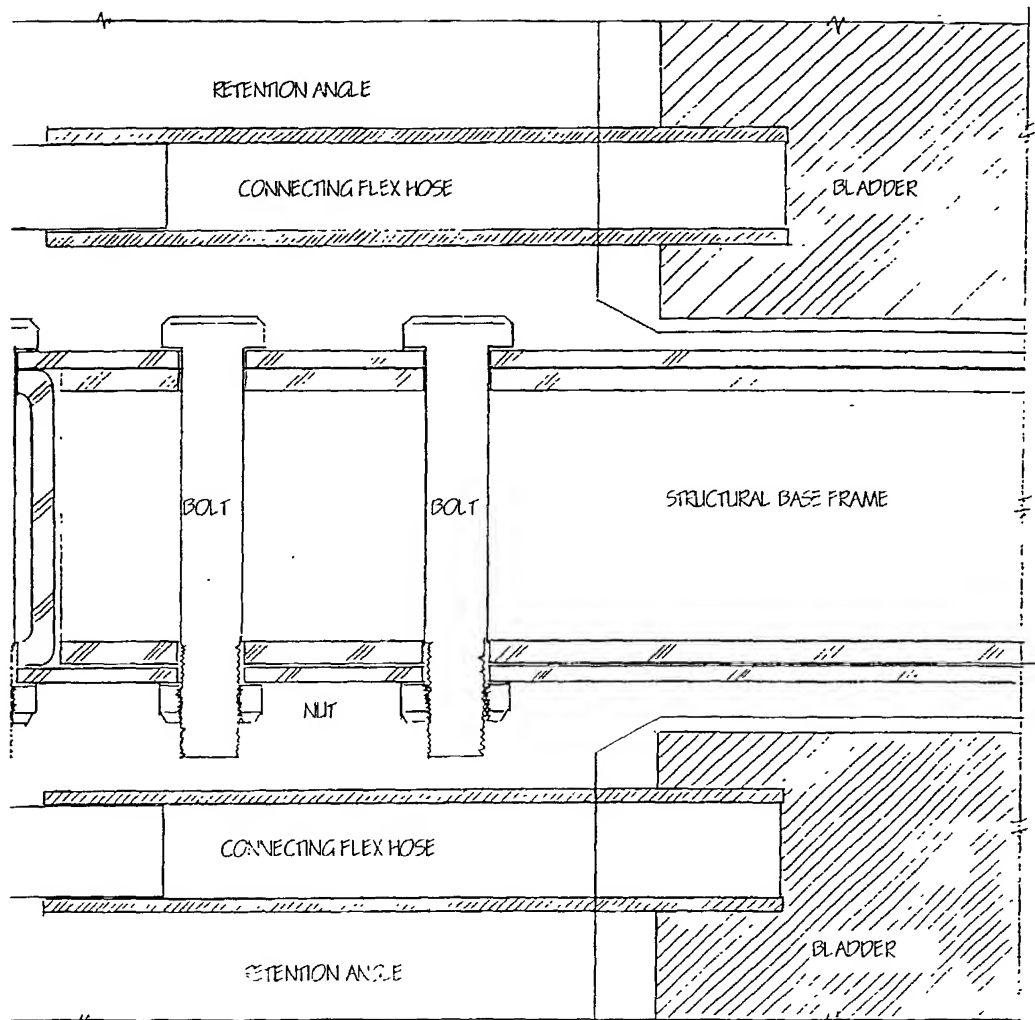


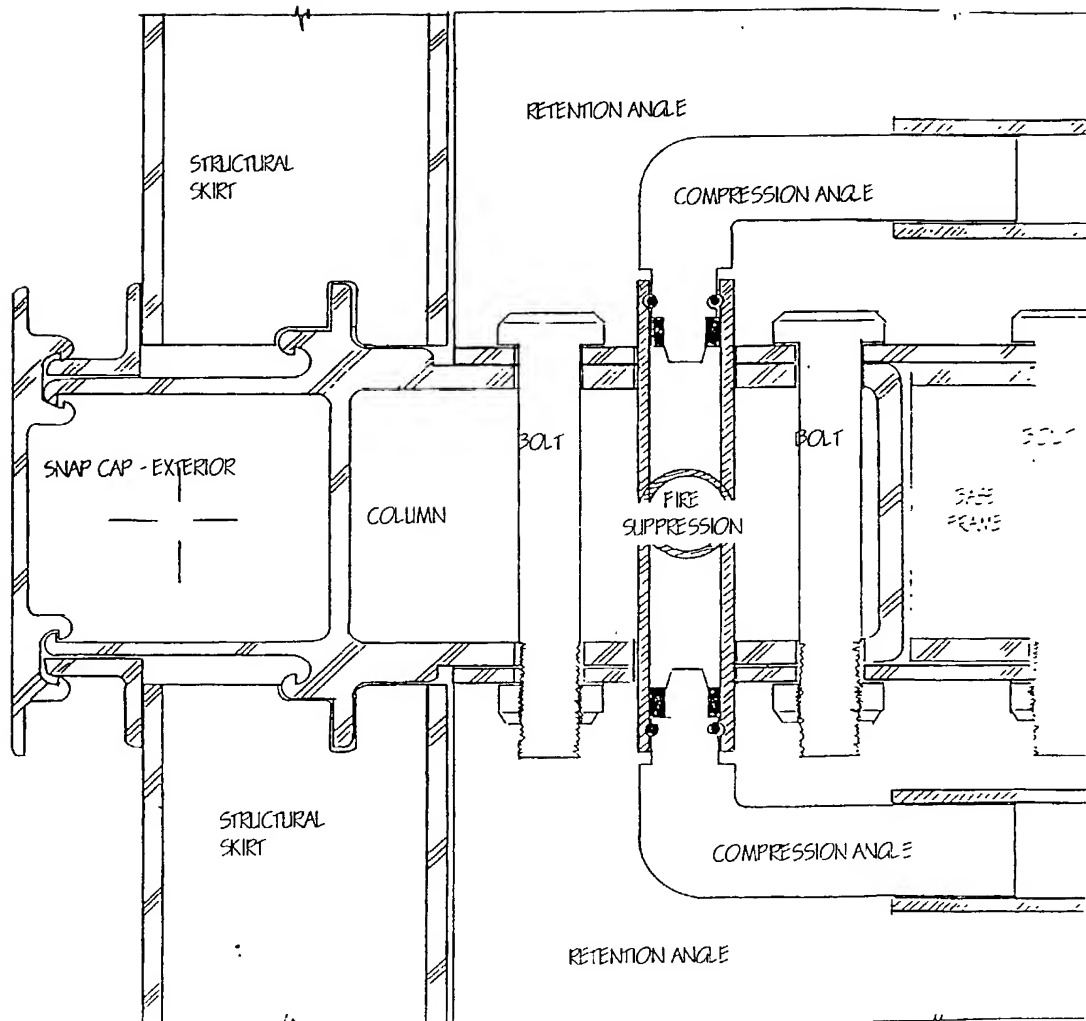


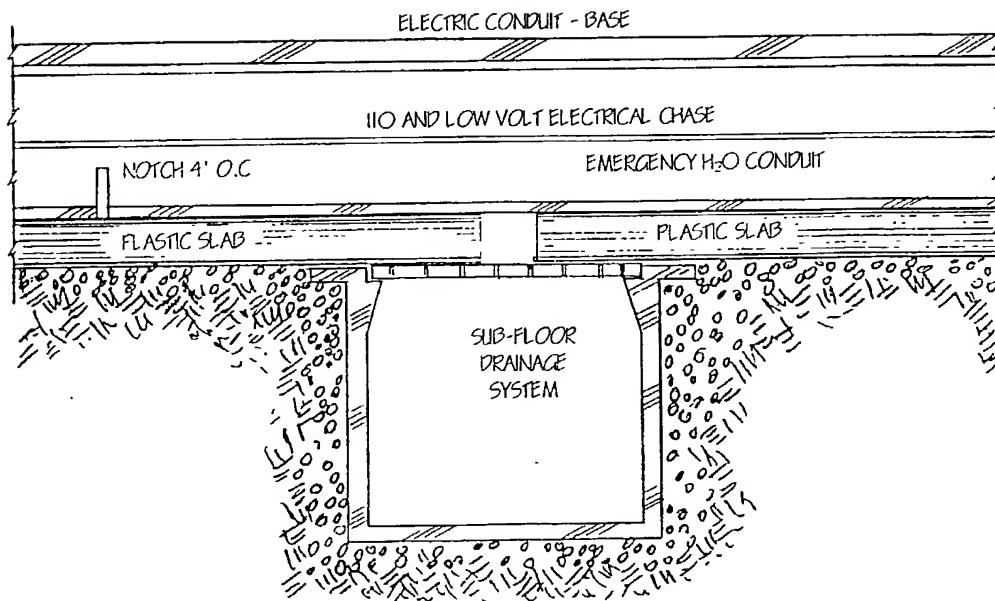


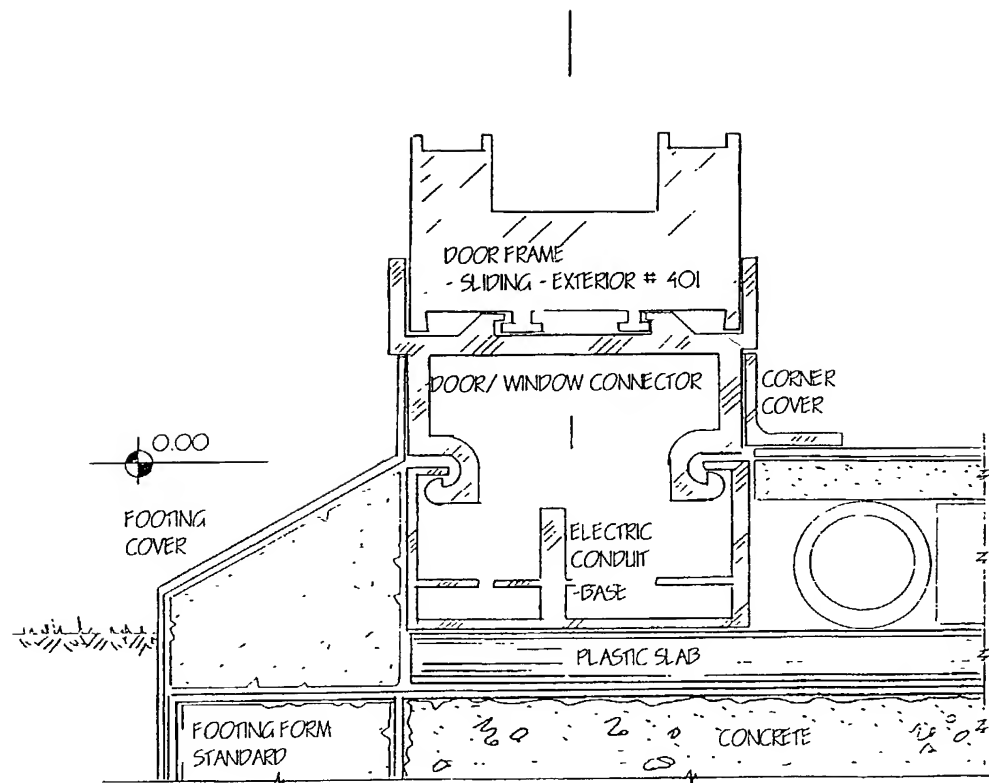

WO 00/68523

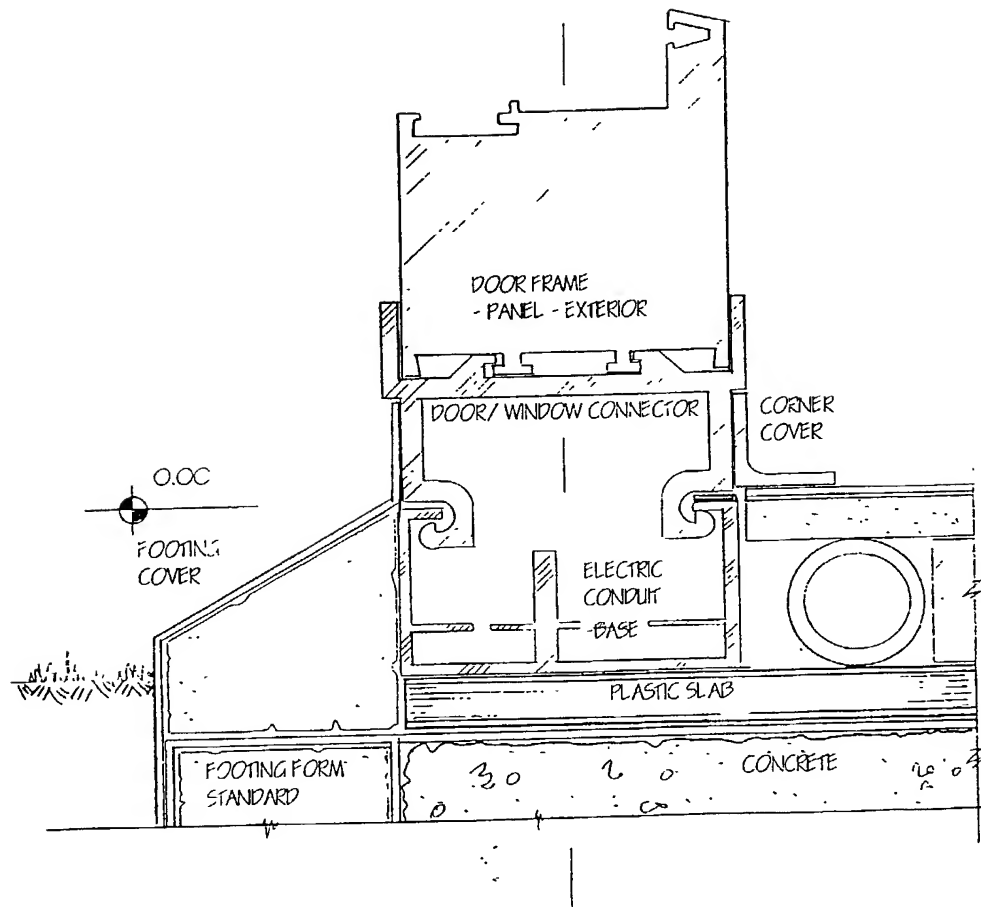


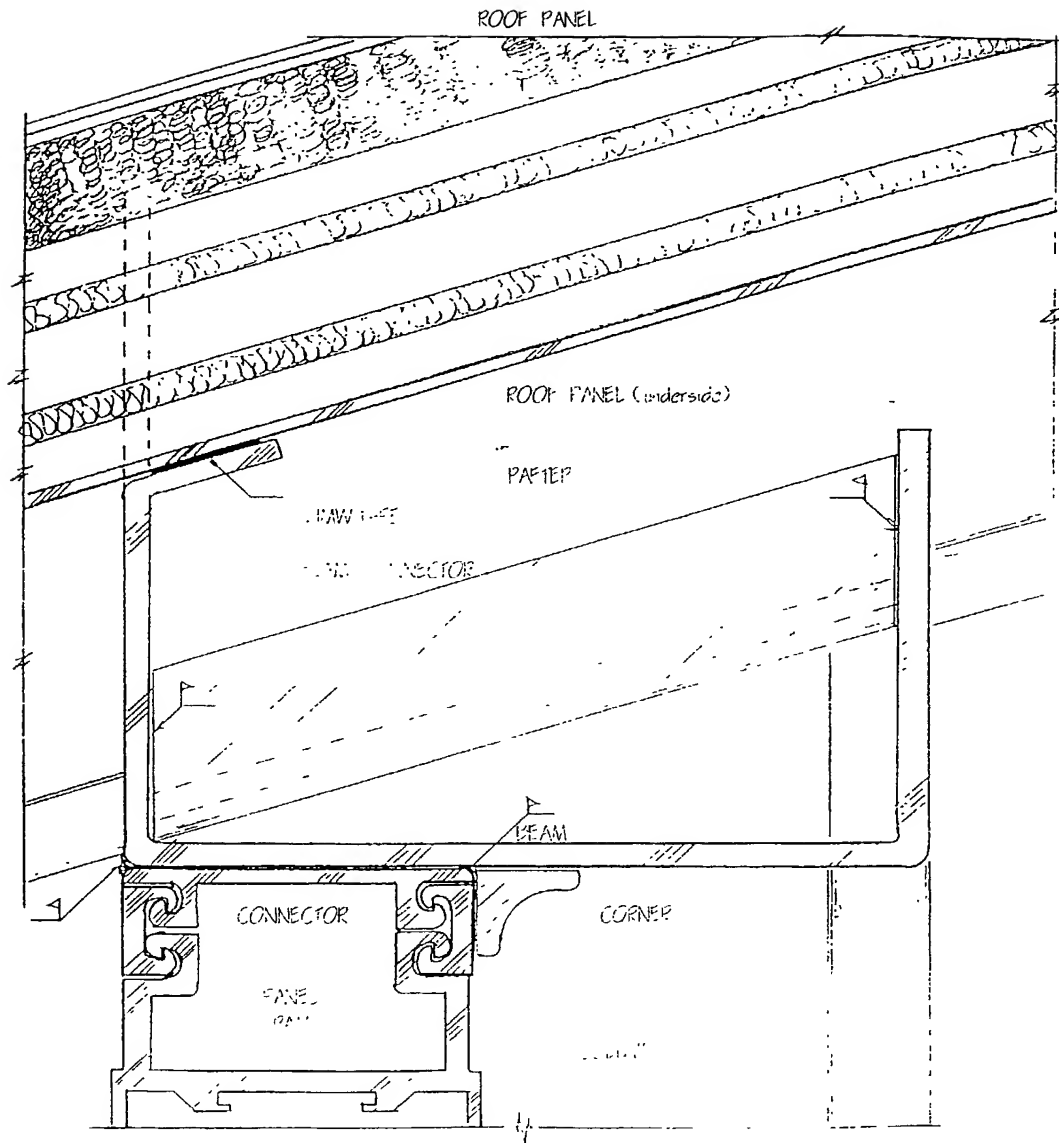

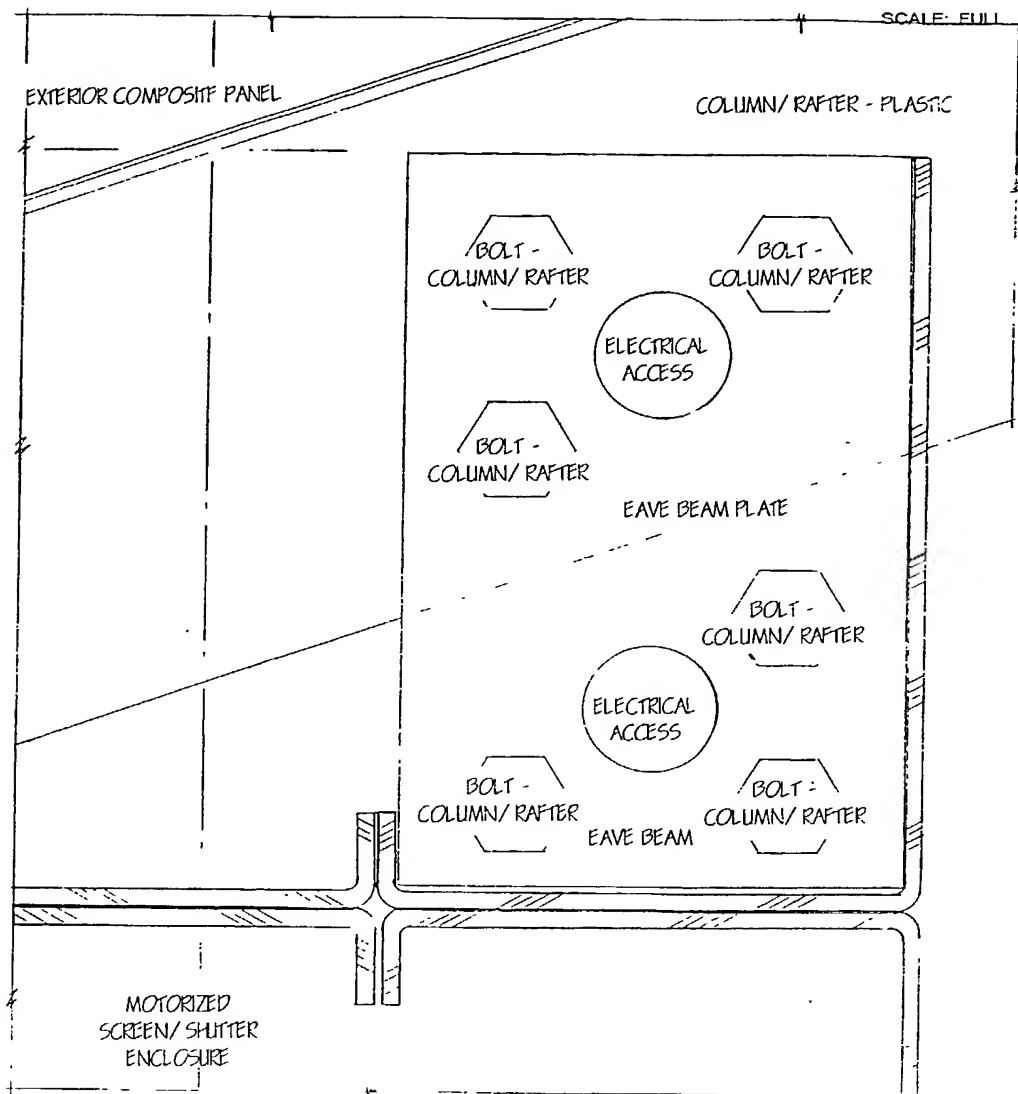


WO 00/68523

PCT/US00/12795

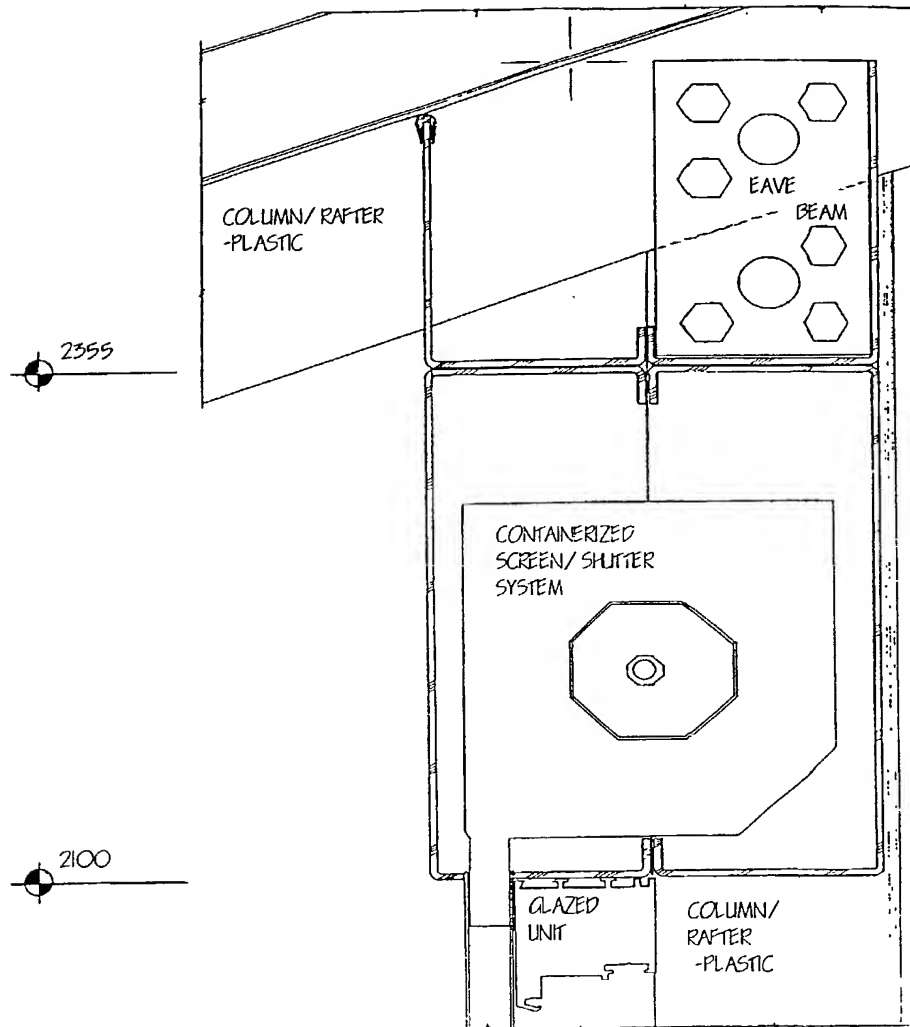



WO 00/68523

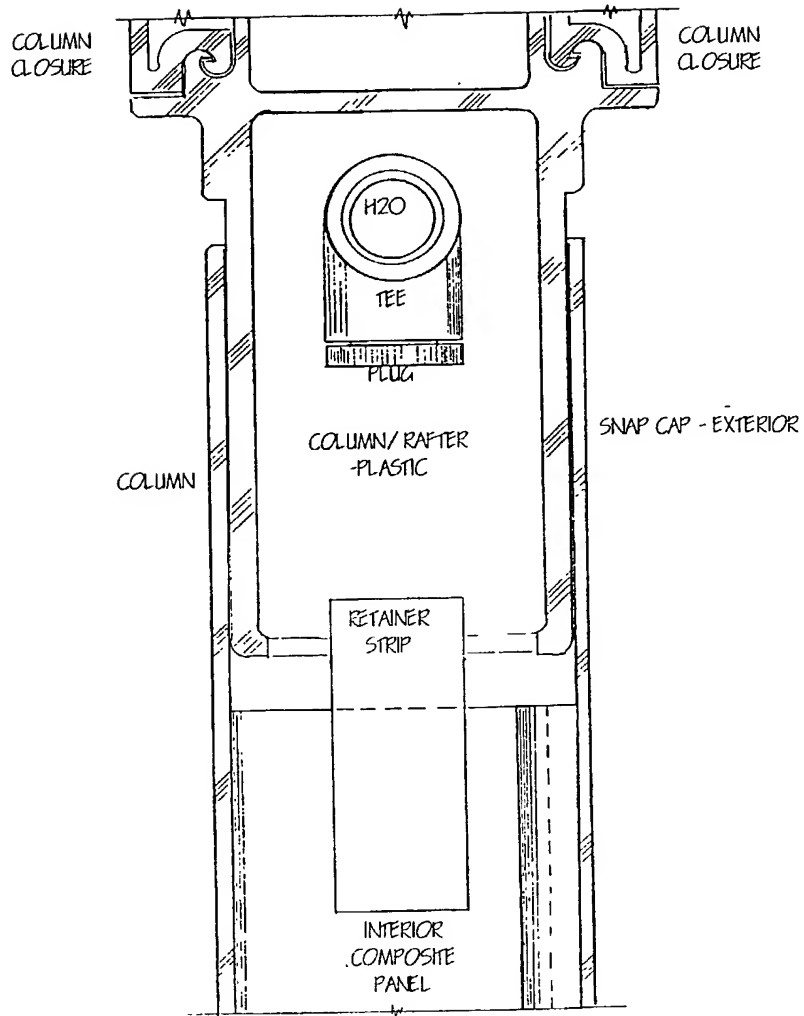

WO 00/68523

PCT/US00/12795

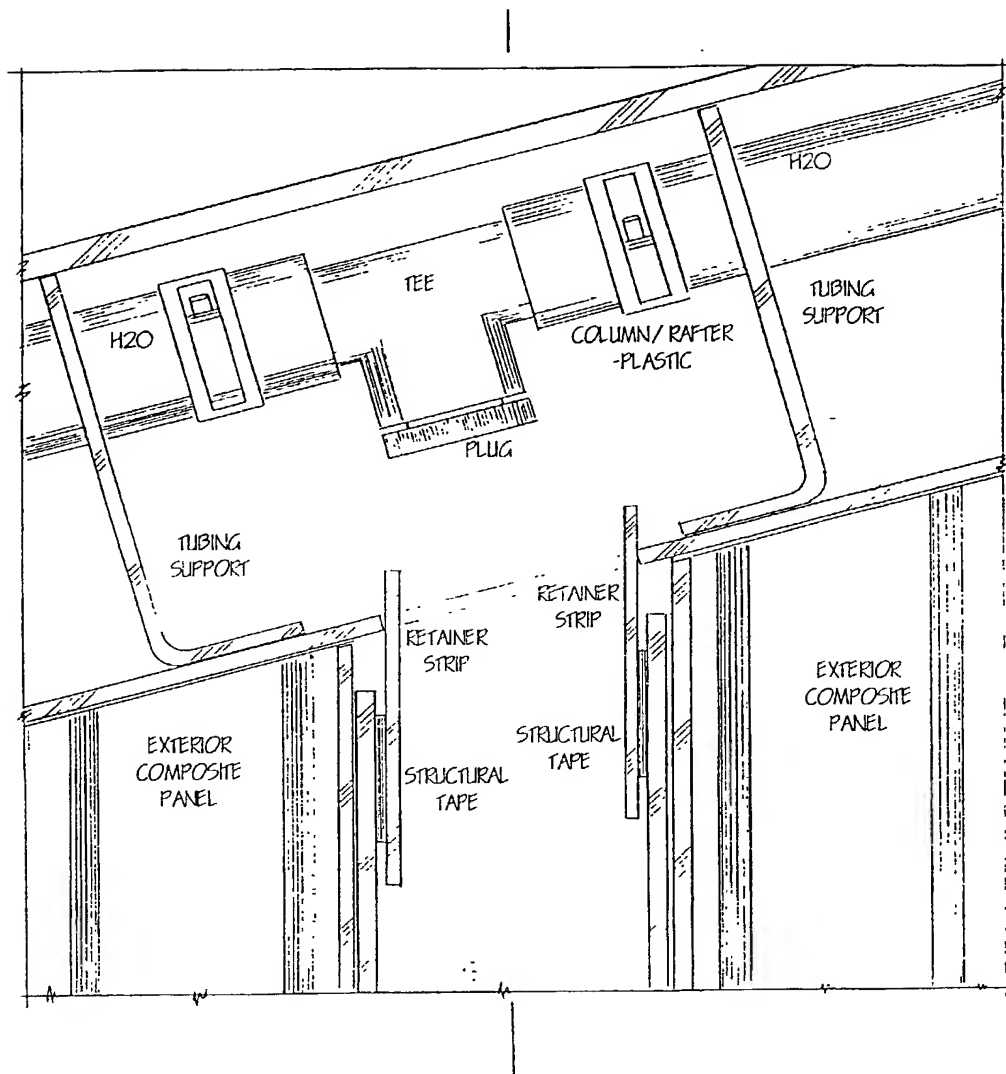


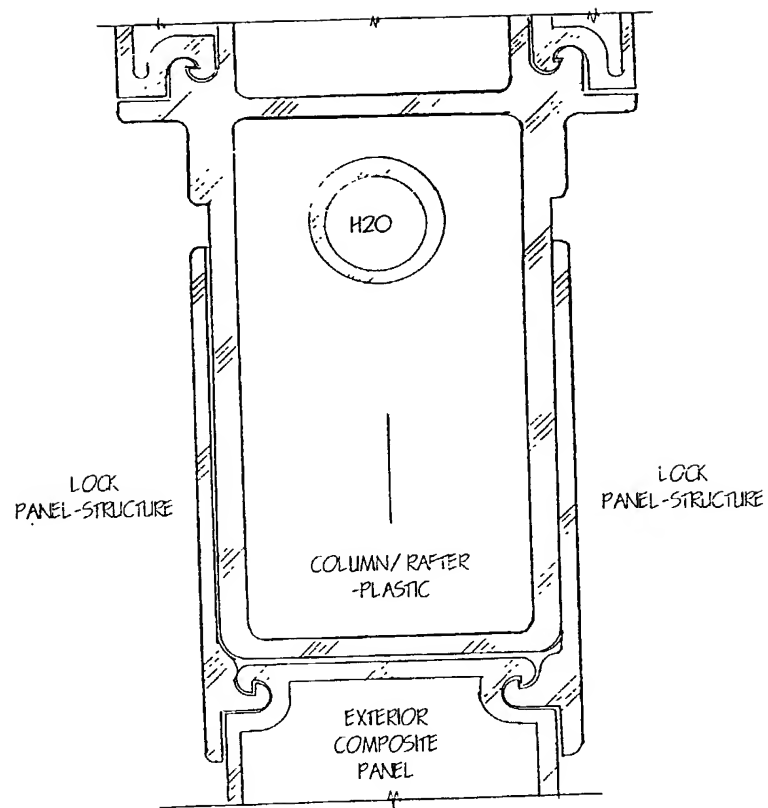

10009369.060602
10/009369


WO 00/68523

PCT/US00/12795

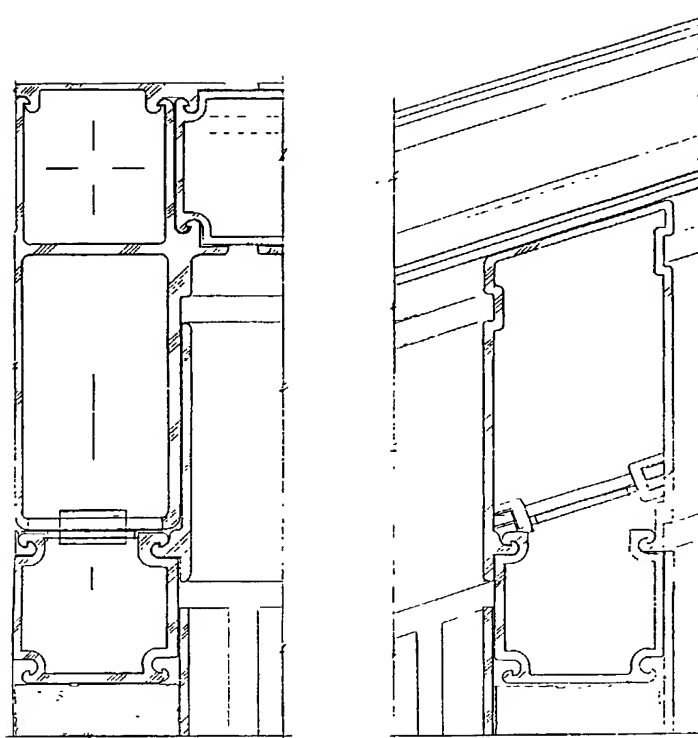


WO 00/68523


PCT/US00/12795

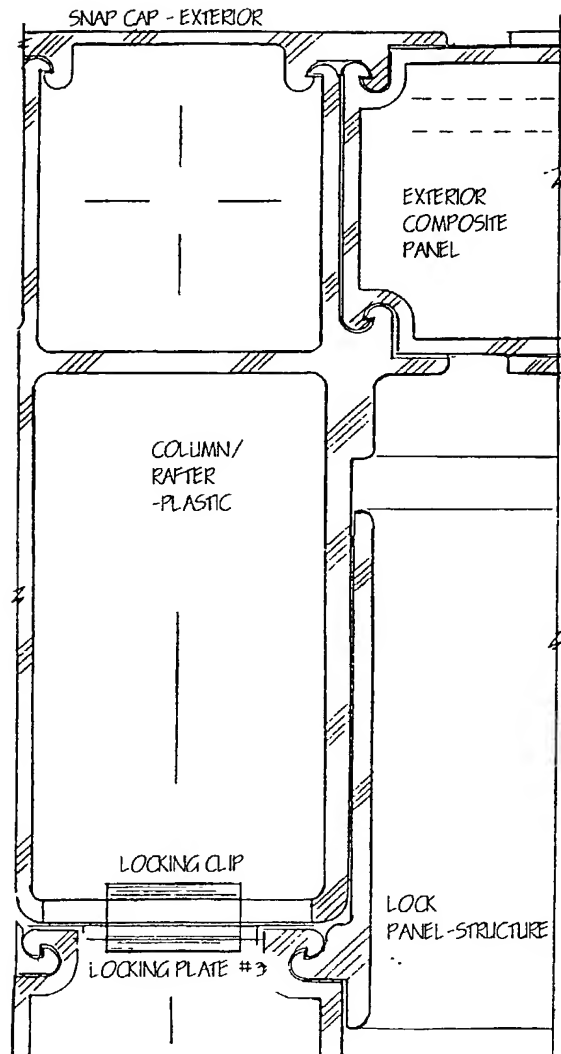


WO 00/68523

PCT/US00/12795

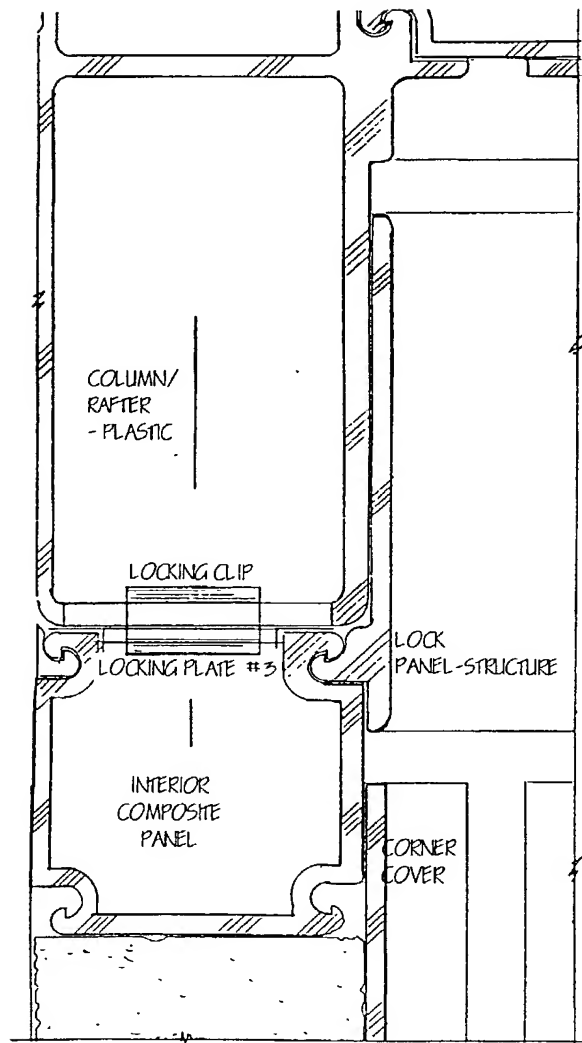

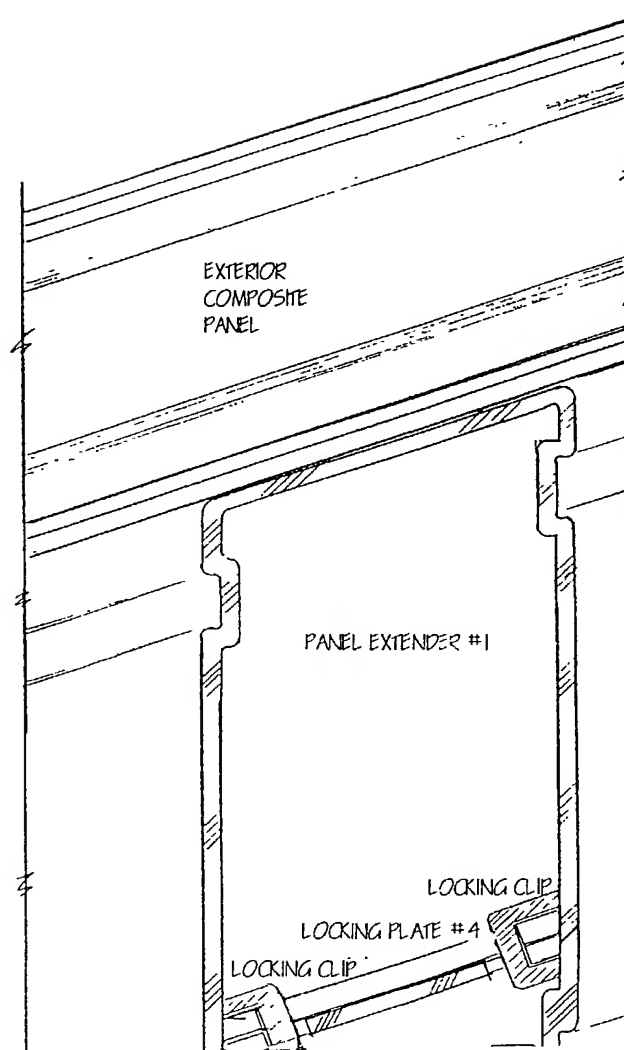


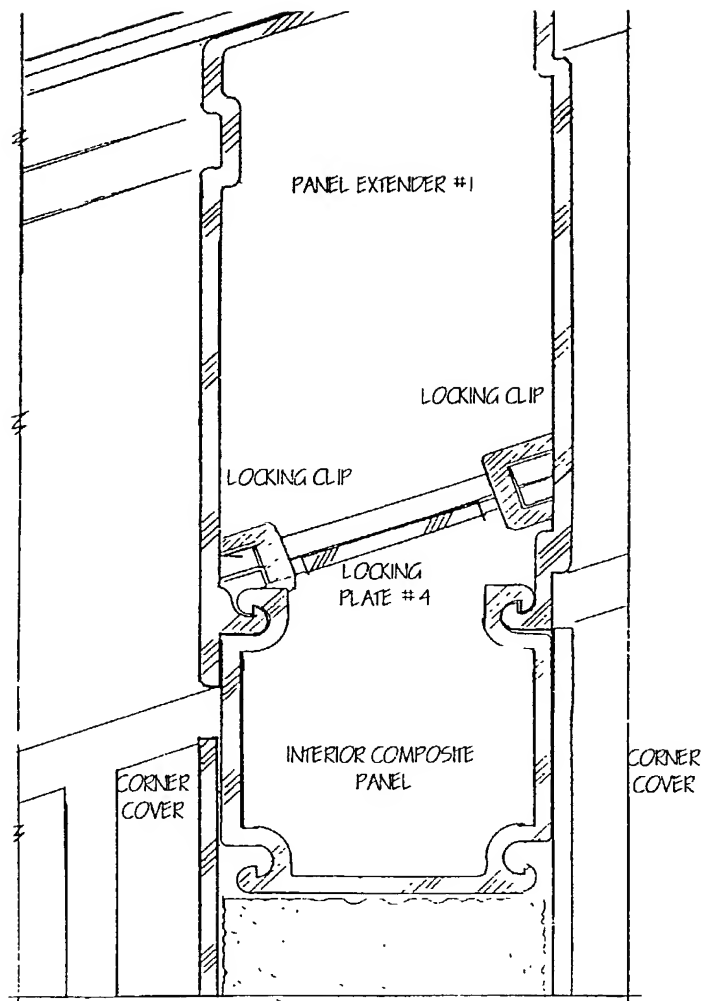


10009369 . 050632

WO 00/68523


10/009369
PCT/US00/12795

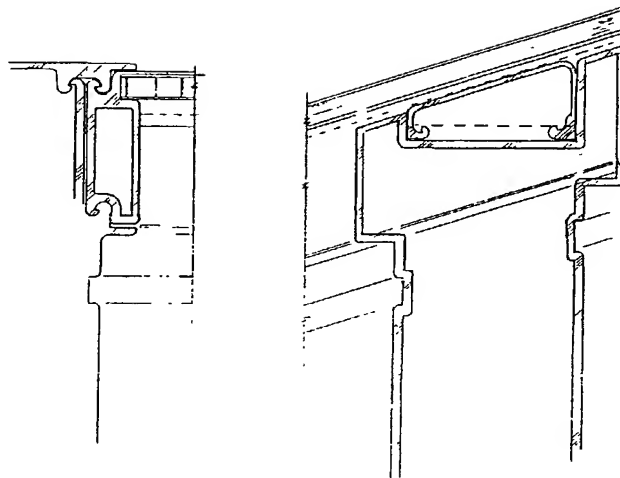

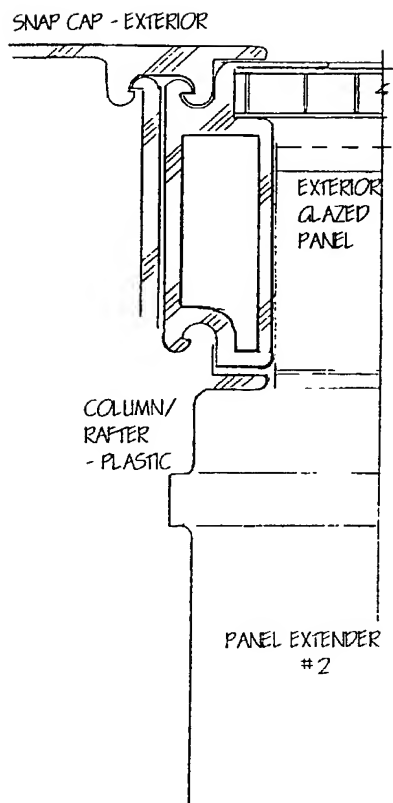


WO 00/68523


PCT/US00/12795

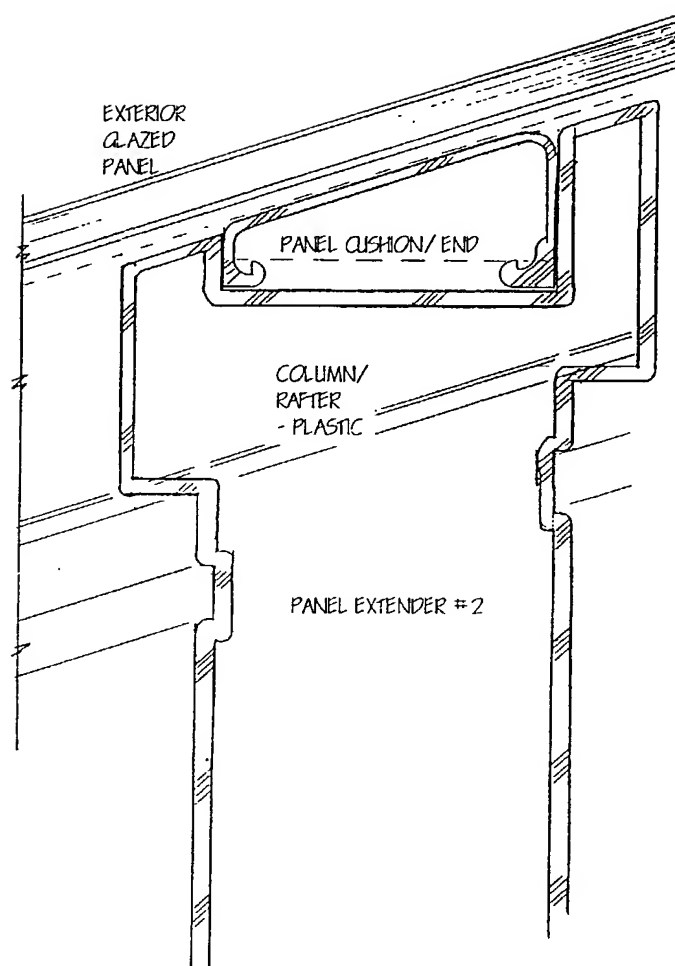

WO 00/68523


PCT/US00/12795

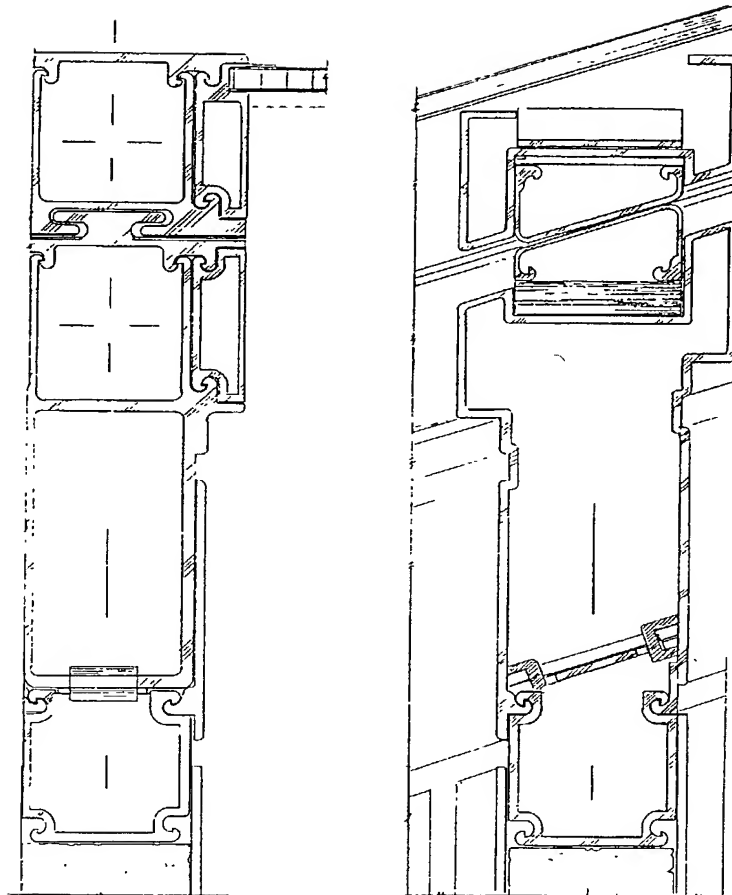

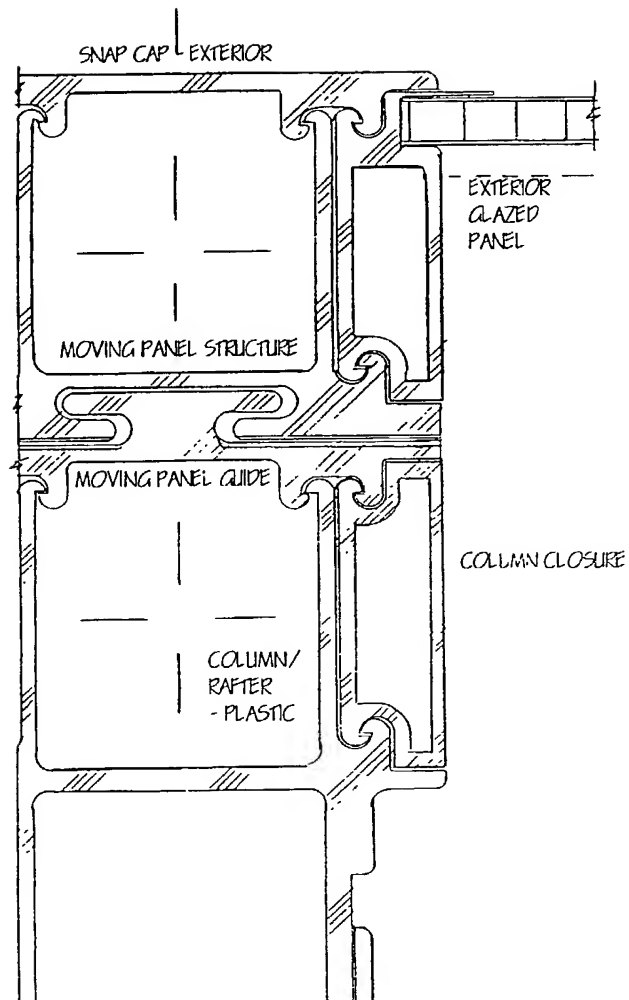



WO 00/68523


PCT/US00/12795

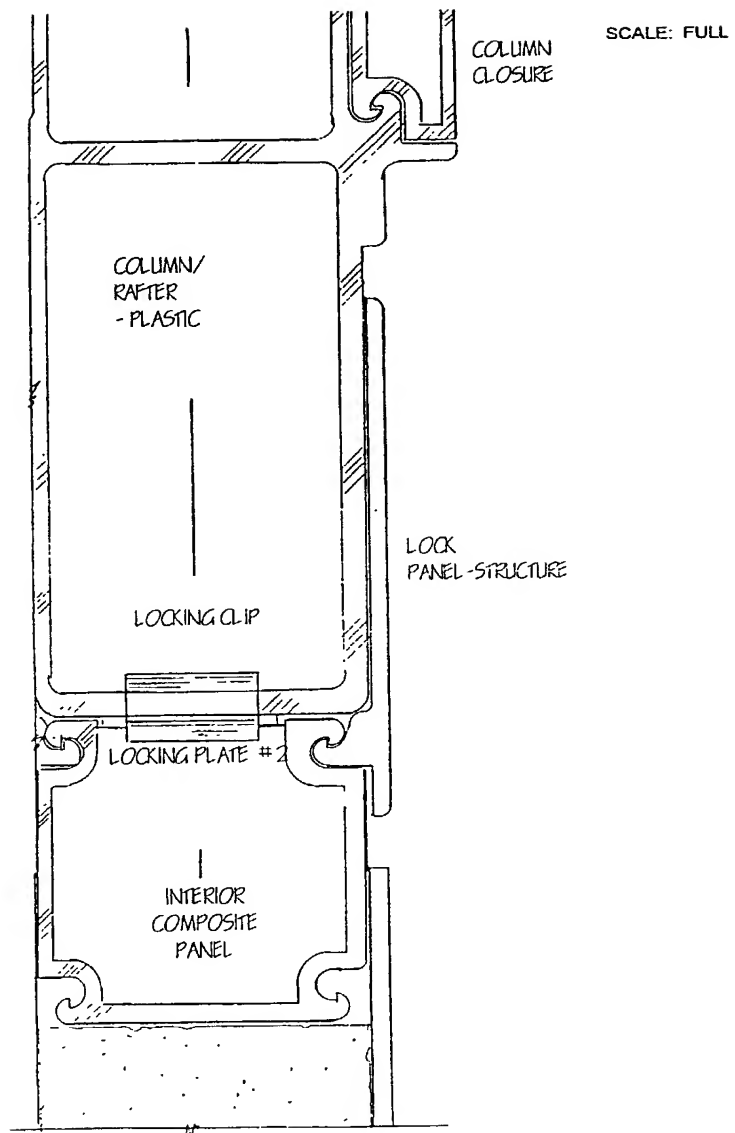

WO 00/68523

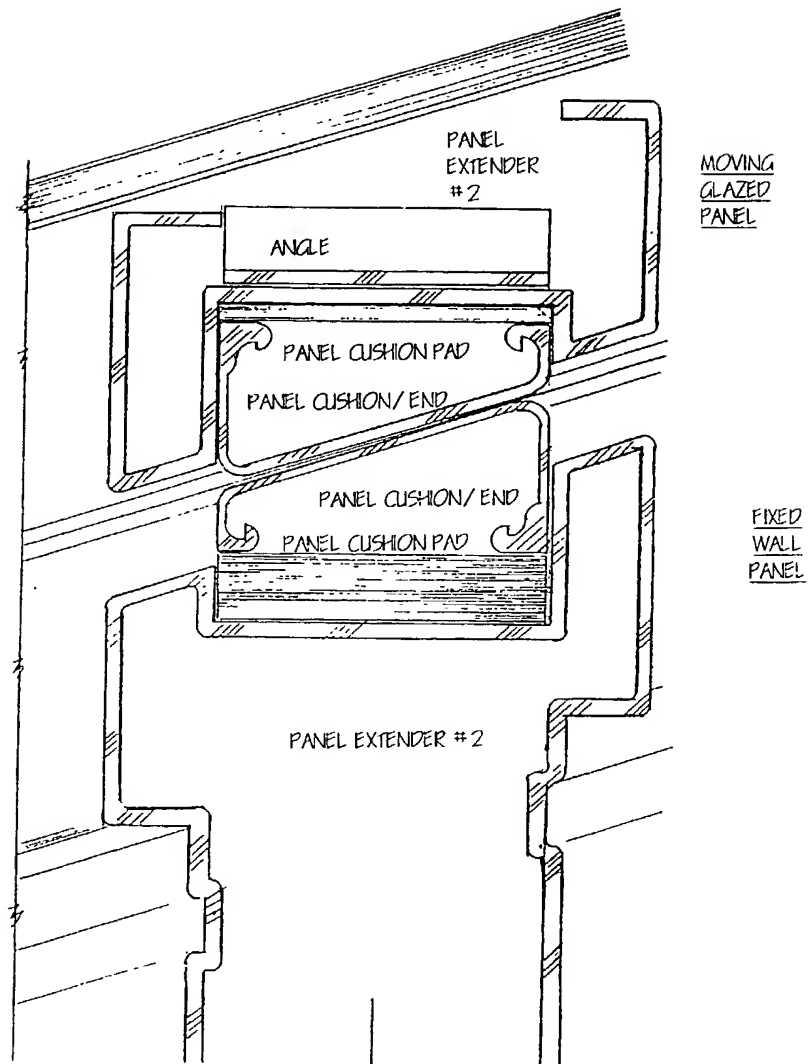


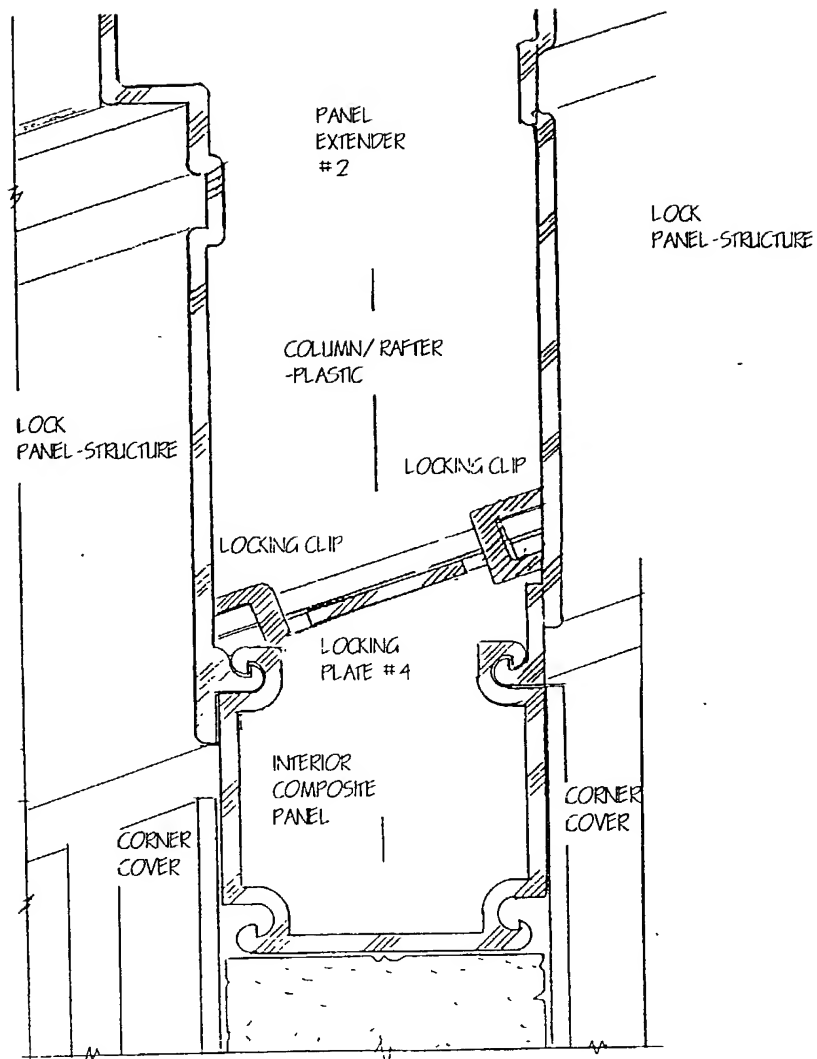

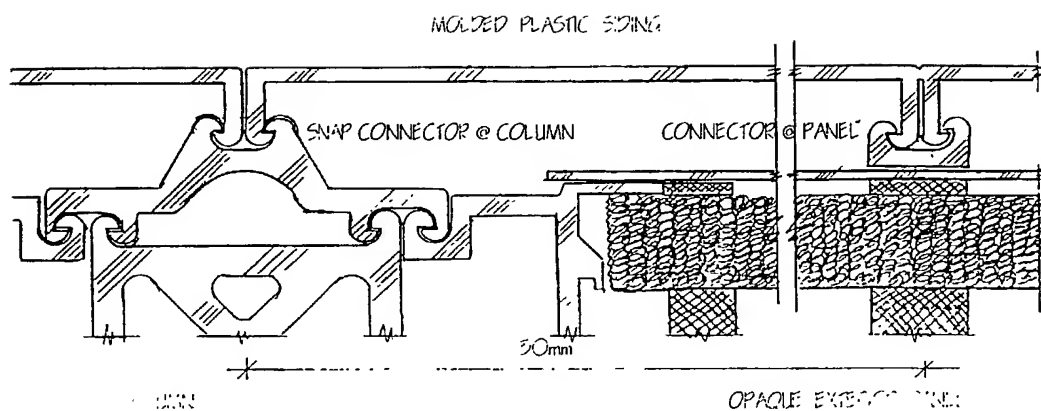

WO 00/68523


PCT/US00/12795

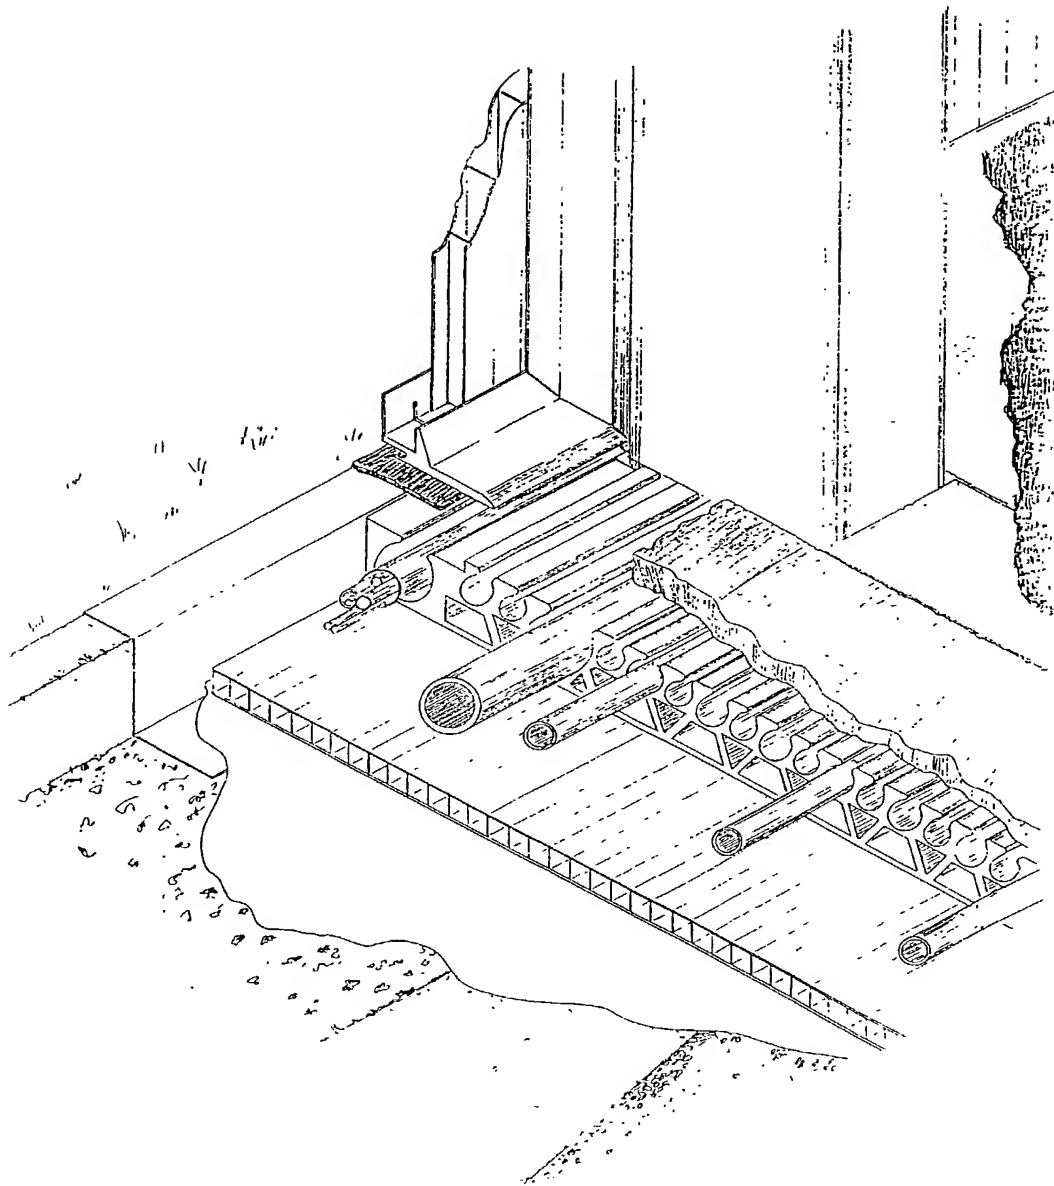

WO 00/68523


INDEX: DOOR/WINDOW

DRAWING	DESCRIPTION
DW01A-019	PLAN @ EXTERIOR PANEL DOOR/WINDOW
DW01B-019	SECTION @ EXTERIOR DOOR WINDOW - PANEL
DW01B-019-ALT	SECTION @ EXTERIOR DOOR W/ ALTERNATE SILL
DW01C-019	PLAN @ EXTERIOR SLIDING DOOR/WINDOW
DW01D-019	SECTION @ EXTERIOR DOOR WINDOW - SLIDER
DW01D-019-ALT	SECTION @ EXTERIOR DOOR WINDOW - SLIDER W/ RAIN GAURD
DW01E-019	SECTION @ EXTERIOR WINDOW
DW01F-019	PLAN @ EXTERIOR WALL/INTERIOR CORNER
DW02A-019	PLAN @ SCREEN/SHUTTER @ GLAZED UNIT
DW02B-019	PLAN @ WALL SCREEN/SHUTTER @ MOTOR SYSTEM
DW02C-019	PLAN @ SCREEN/SHUTTER @ END
DW02D-019	SECTION @ SCREEN/SHUTTER
DW02E-019	SECTION @ SCREEN/SHUTTER
DW02F-019	SECTION @ SCREEN/SHUTTER
DW02G-019	SECTION @ SCREEN/SHUTTER @ SIDE WALL
DW02H-019	SECTION @ WINDOW/DOOR @ EAVE
DW03A-019	PLAN @ INTERIOR DOOR
DW04A-019	PLAN @ INTERIOR HINGED DOOR
DW04B-019	SECTION @ INTERIOR HINGED DOOR @ HEADER
DW04C-019	SECTION @ INTERIOR HINGED DOOR @ SILL
DW05A-019	PLAN @ INTERIOR BI-FOLD DOOR
DW05B-019	SECTION @ INTERIOR BI-FOLD DOOR @ HEADER
DW05C-019	SECTION @ INTERIOR BI-FOLD DOOR @ SILL
DW06A-019	PLAN @ SLIDING DOORS
DW06B-019	SECTION @ SLIDING DOORS @ HEADER
DW06C-019	SECTION @ SLIDING DOOR @ SILL
DW07A-019	PLAN @ MANIFOLD @ DOOR

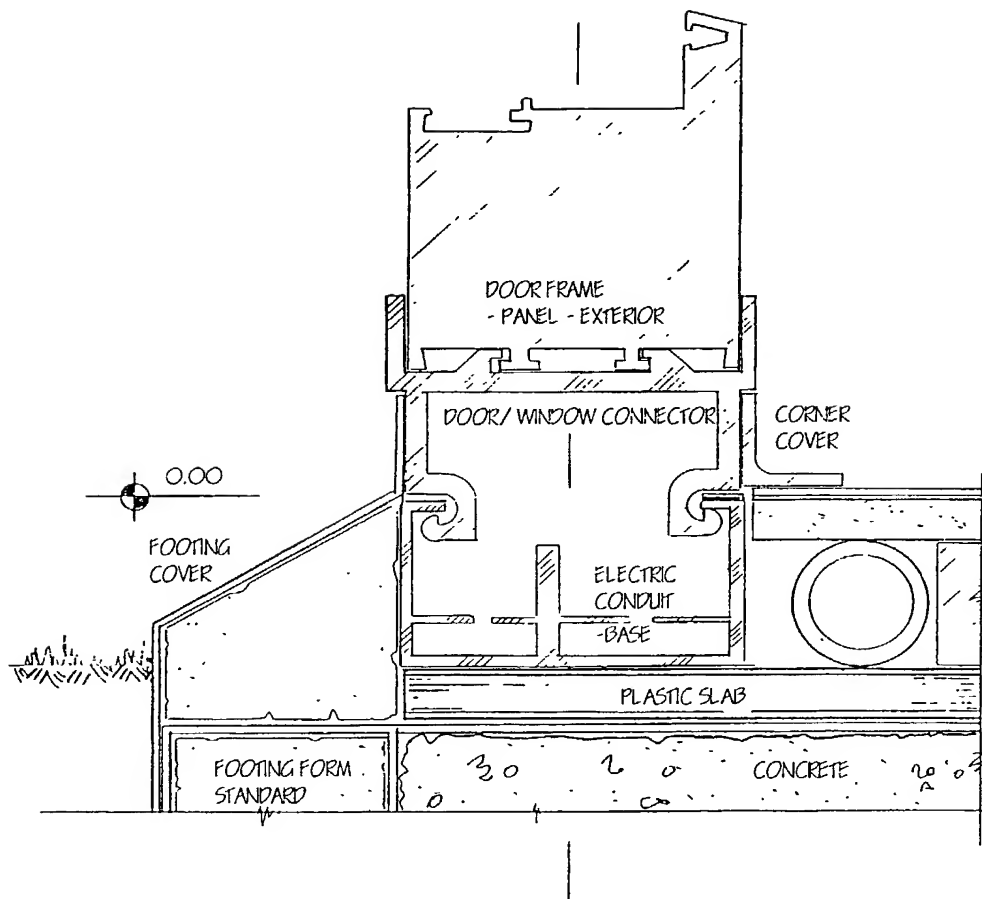


WO 00/68523


PCT/US00/12795

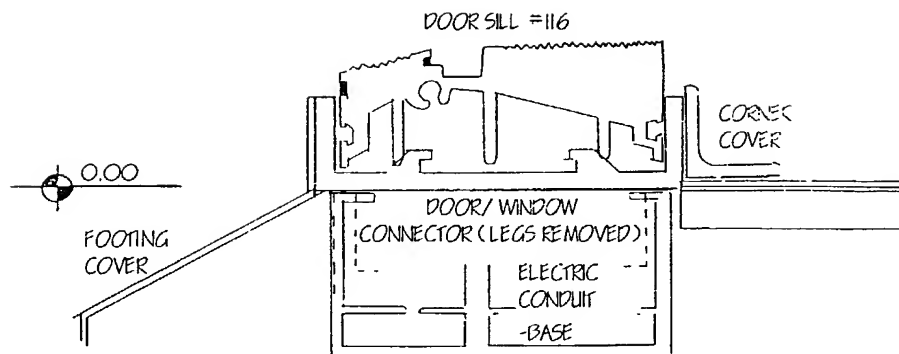

WO 00/68523


PCT/US00/12795

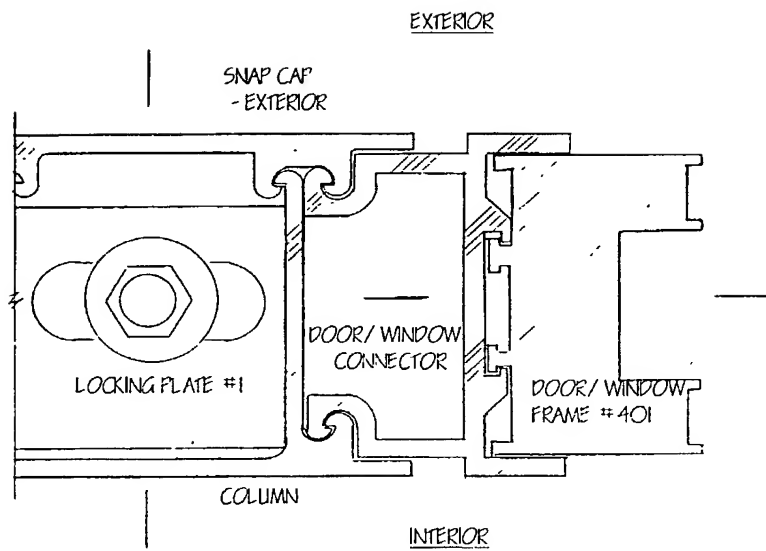


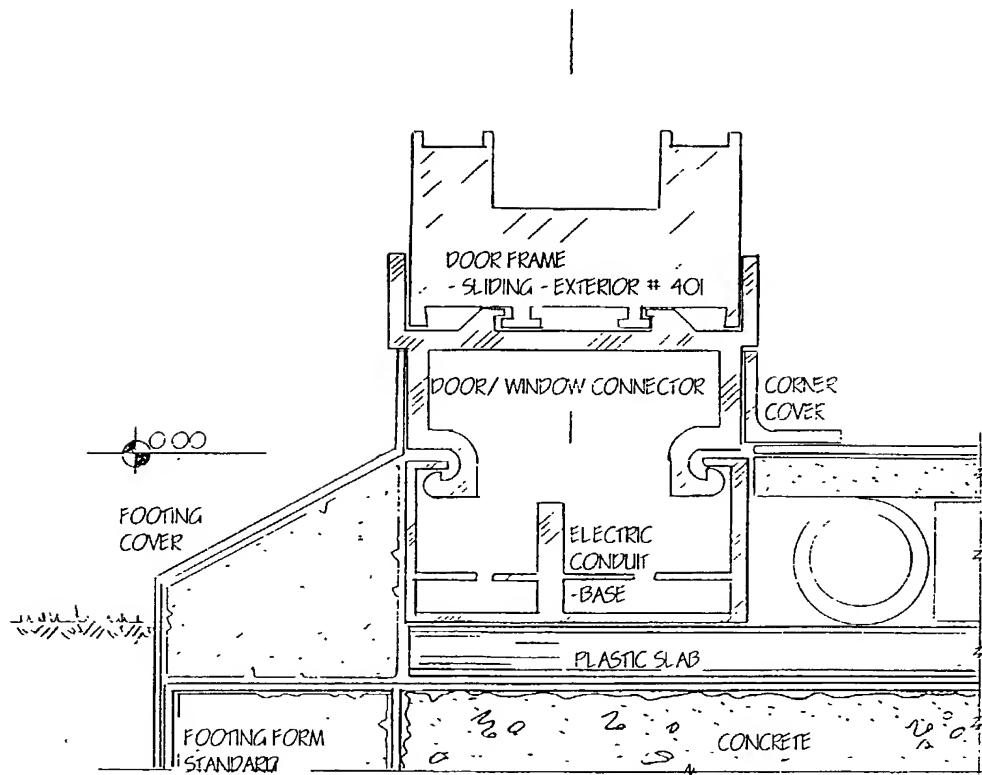

WO 00/68523


PCT/US00/12795

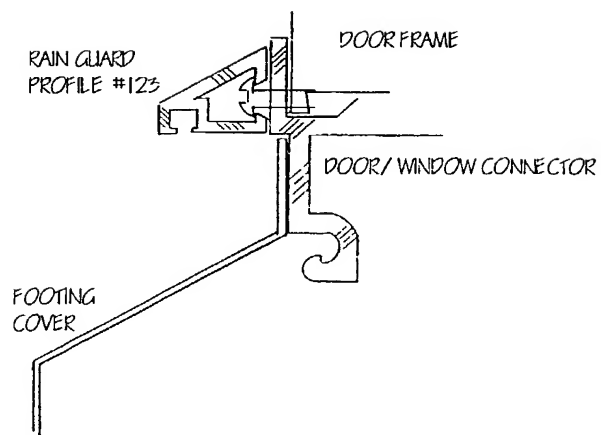

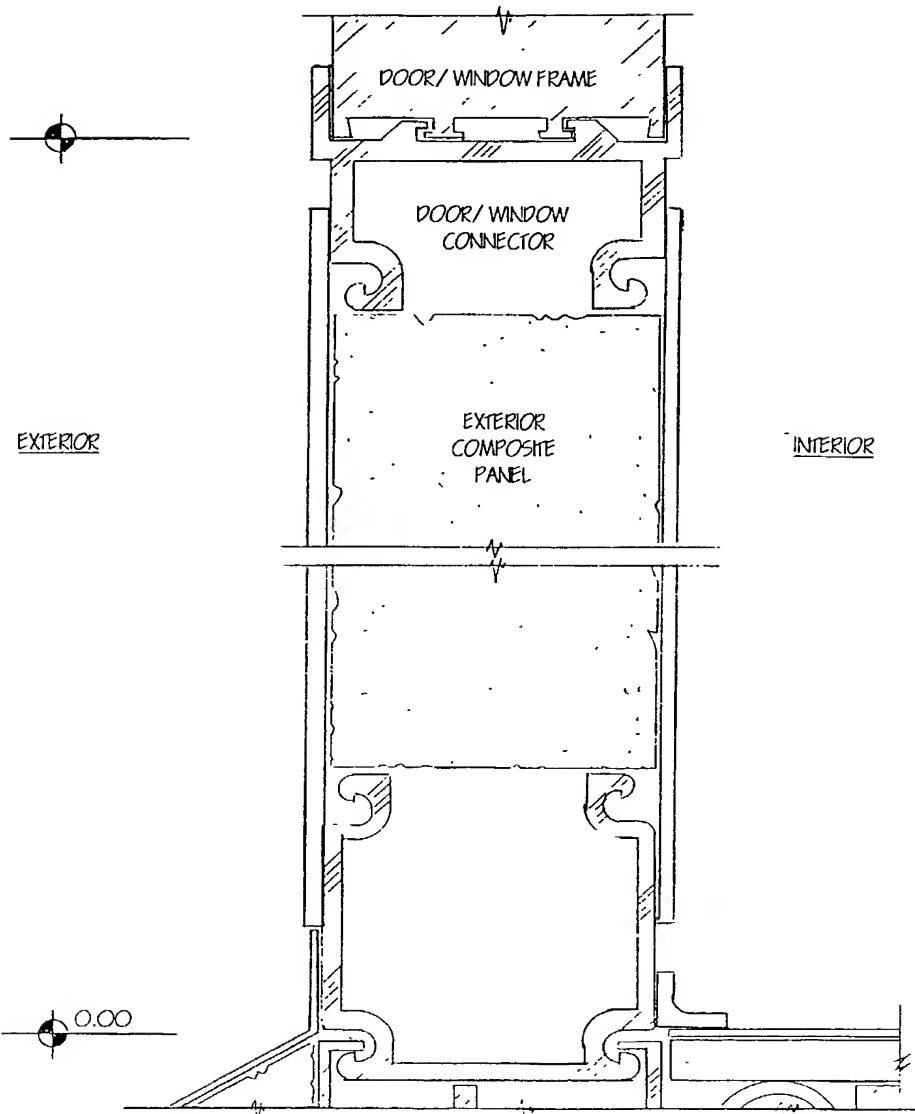


WO 00/68523

PCT/US00/12795

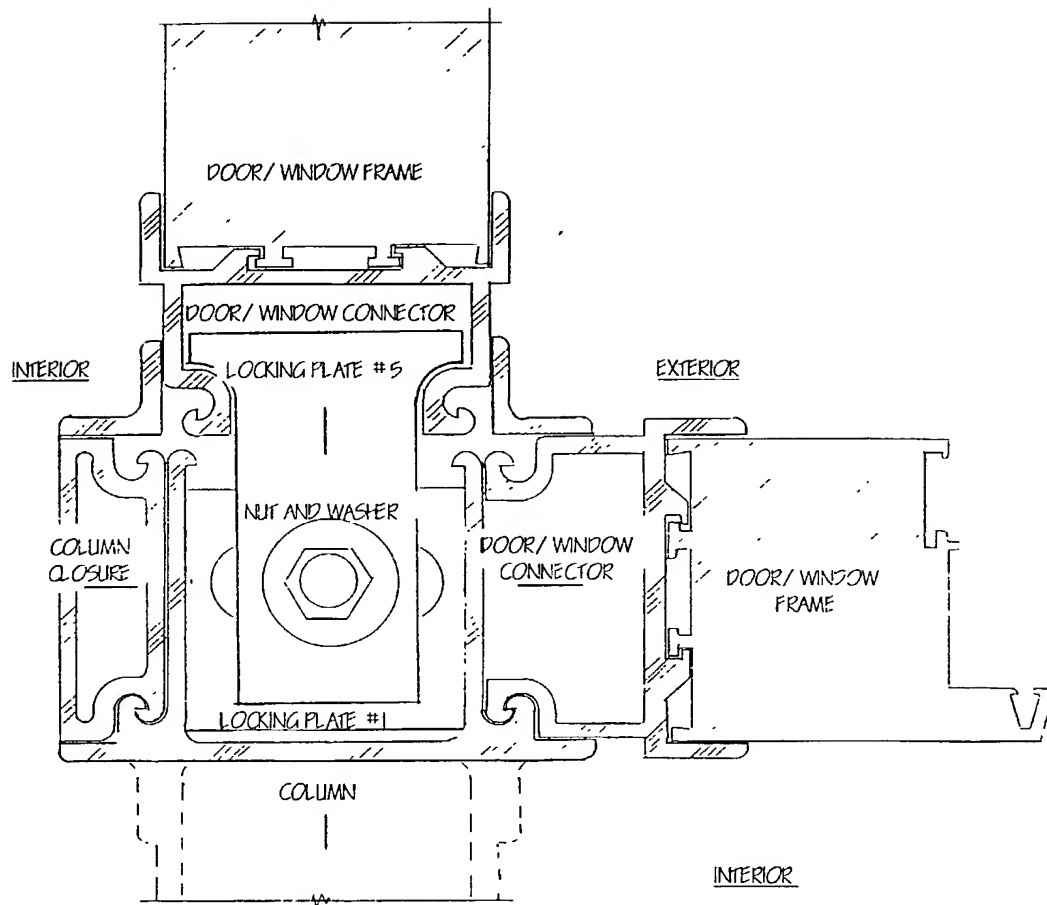

WO 00/68523

PCT/US00/12795

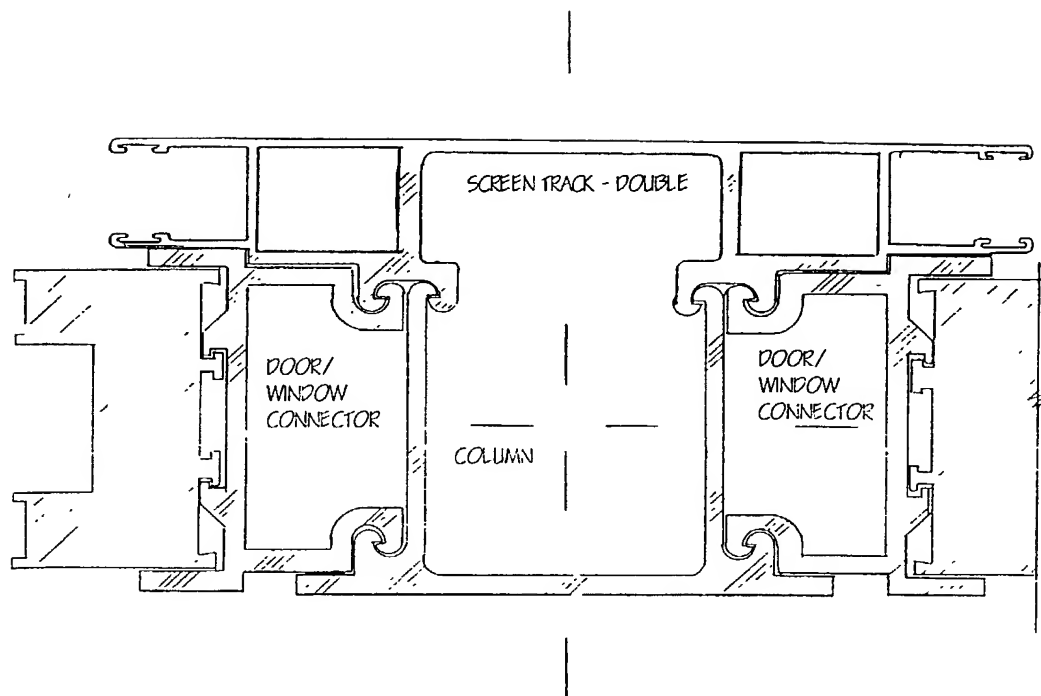


10009369 . 060602

10/009369


WO 00/68523

PCT/US00/12795

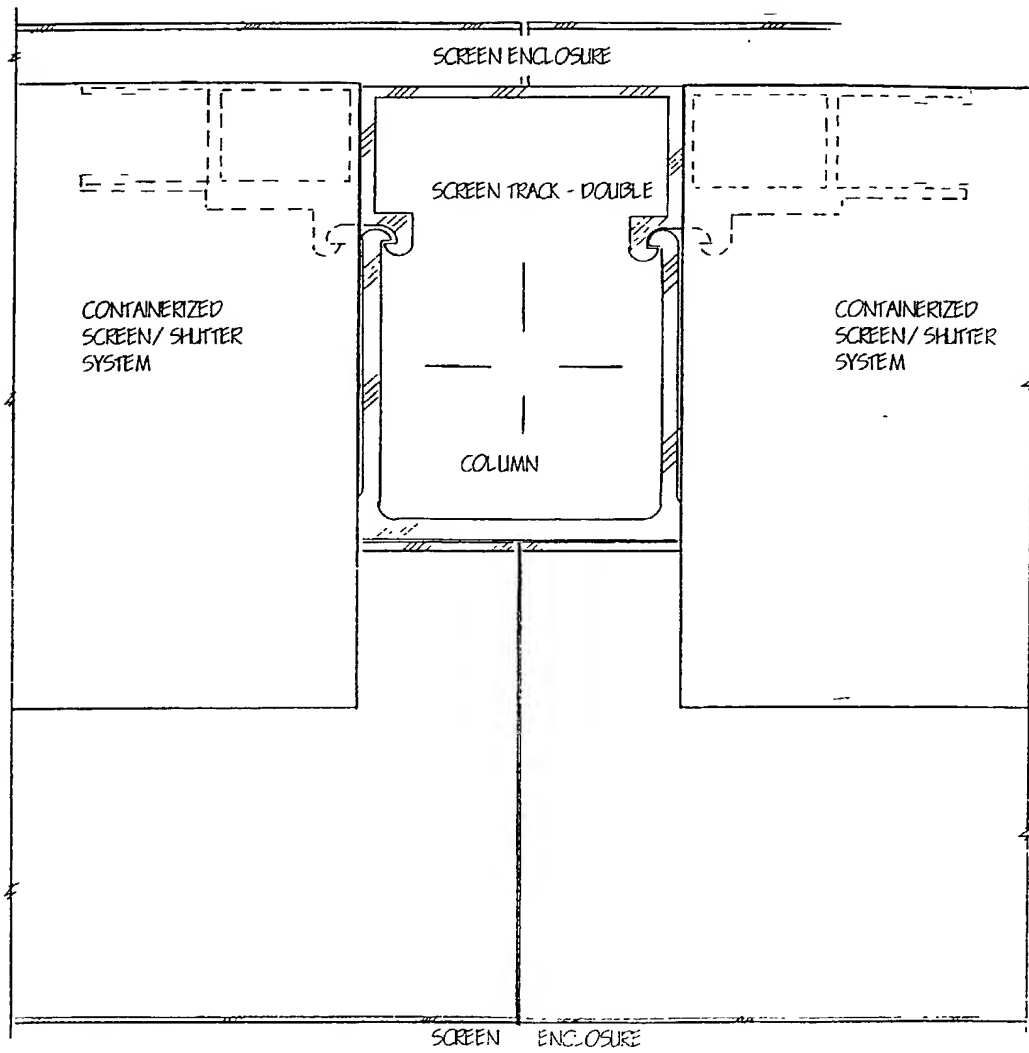


WO 00/68523


PCT/US00/12795

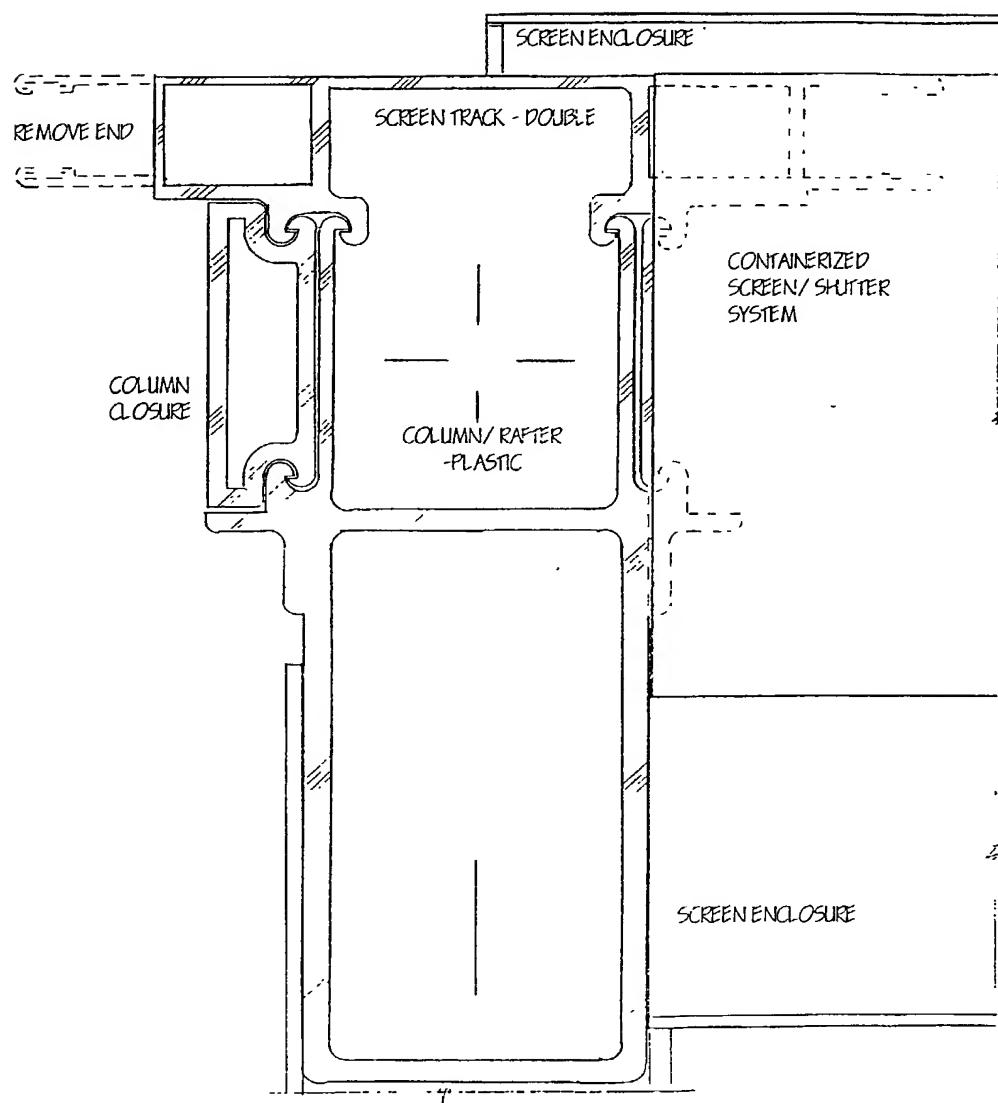

WO 00/68523


PCT/US00/12795

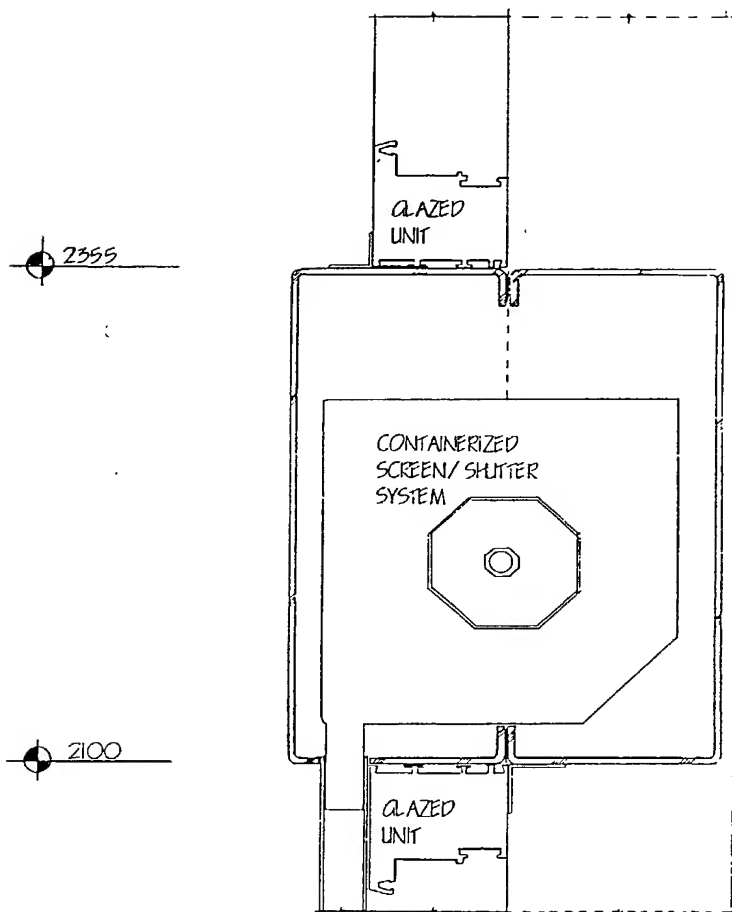

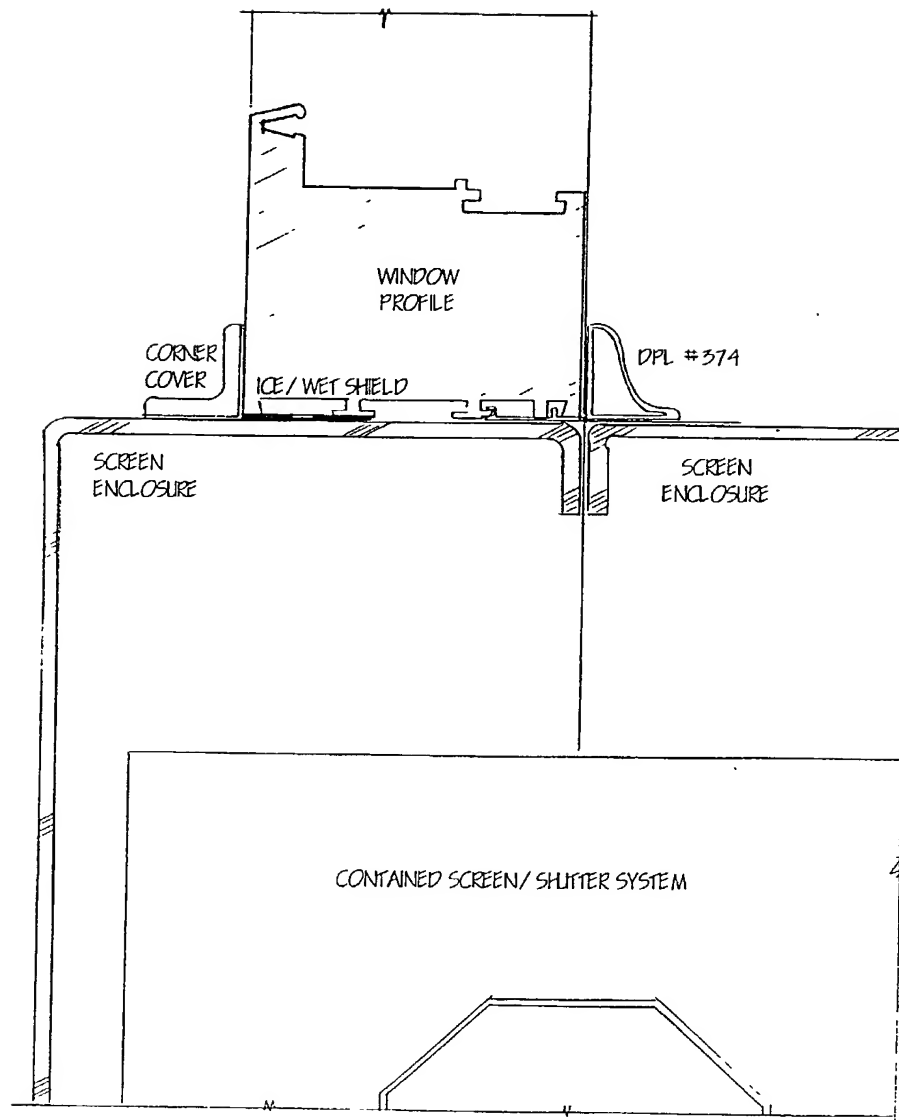


WO 00/68523

PCT/US00/12795

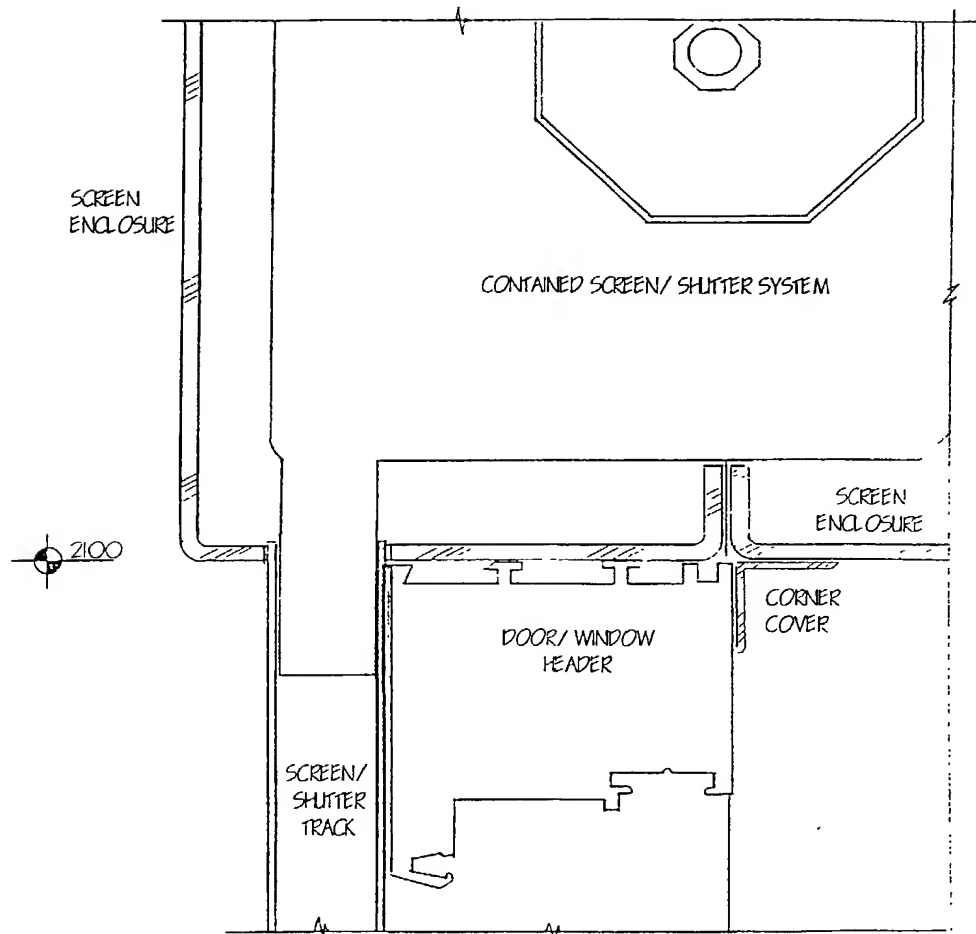

WO 00/68523


PCT/US00/12795

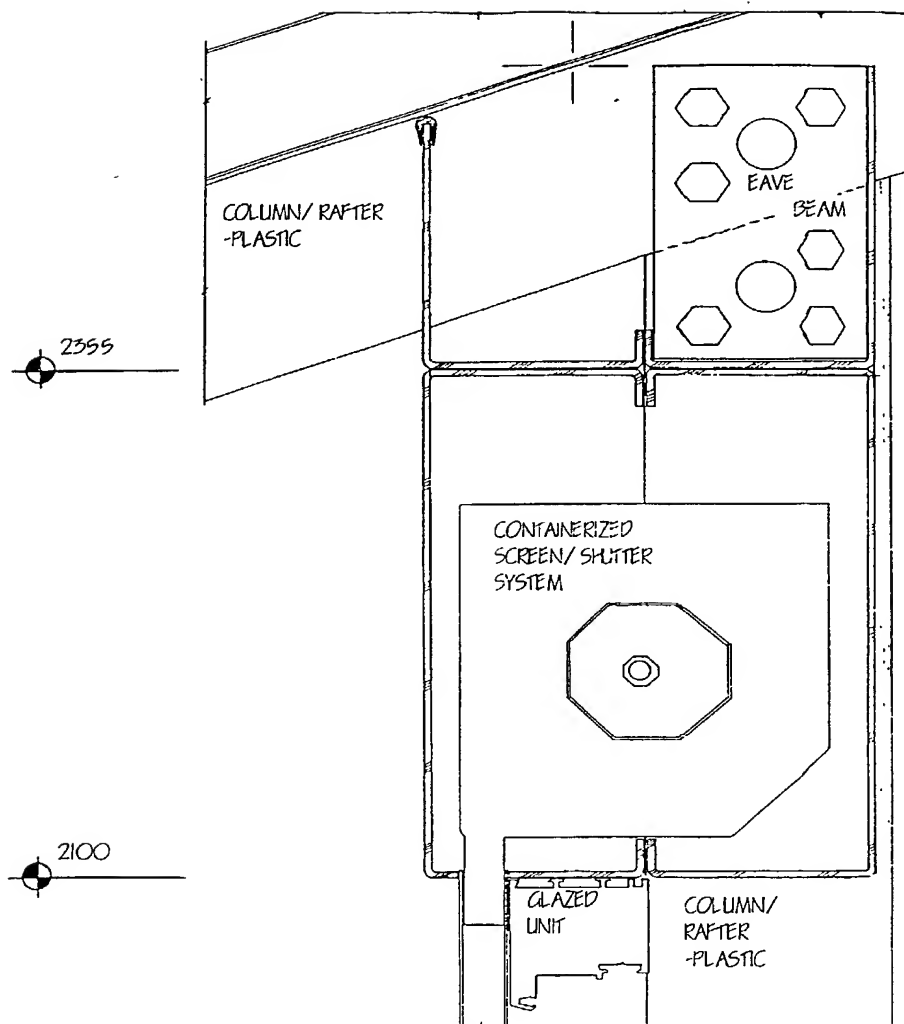

10009369 060602
10/009369


WO 00/68523


PCT/US00/12795

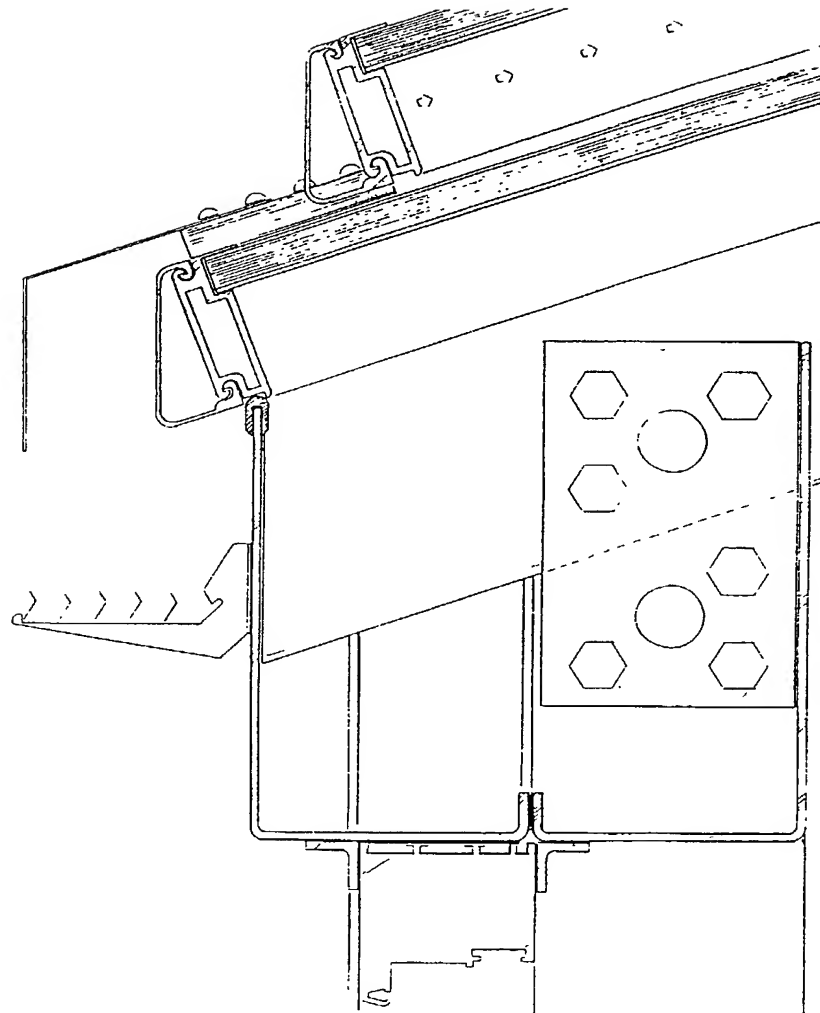


WO 00/68523


PCT/US00/12795

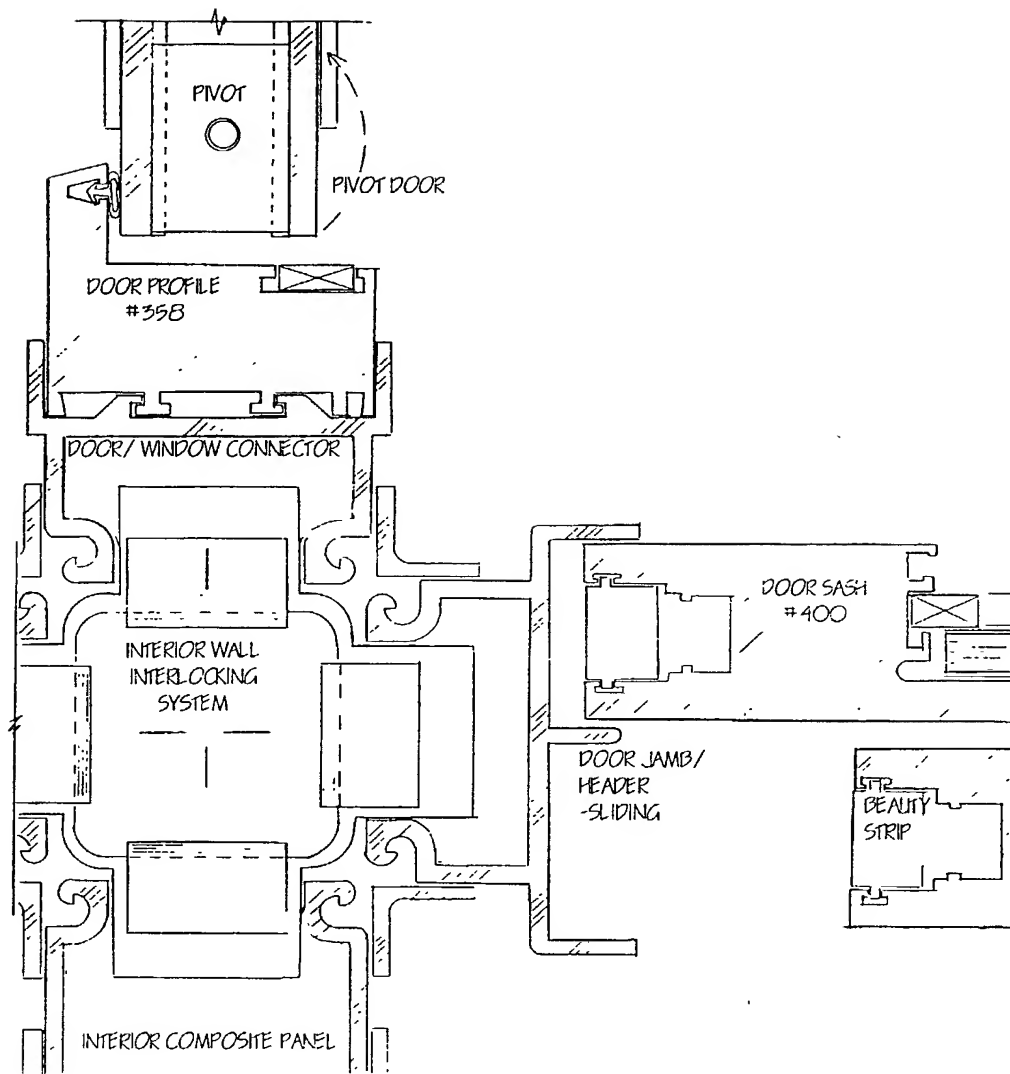


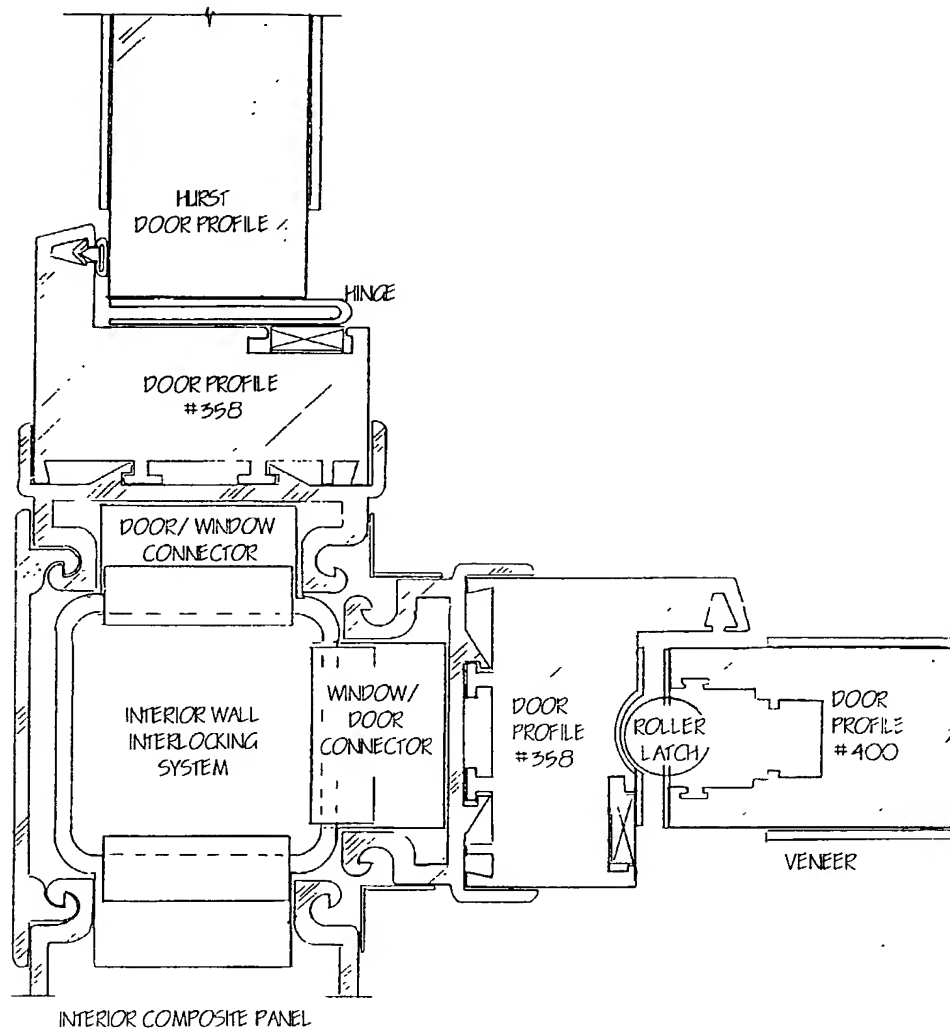

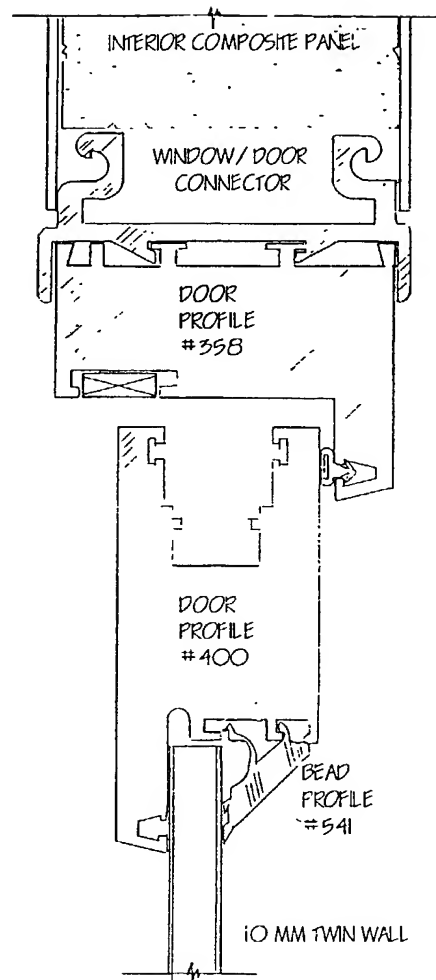


PCT/US00/12795

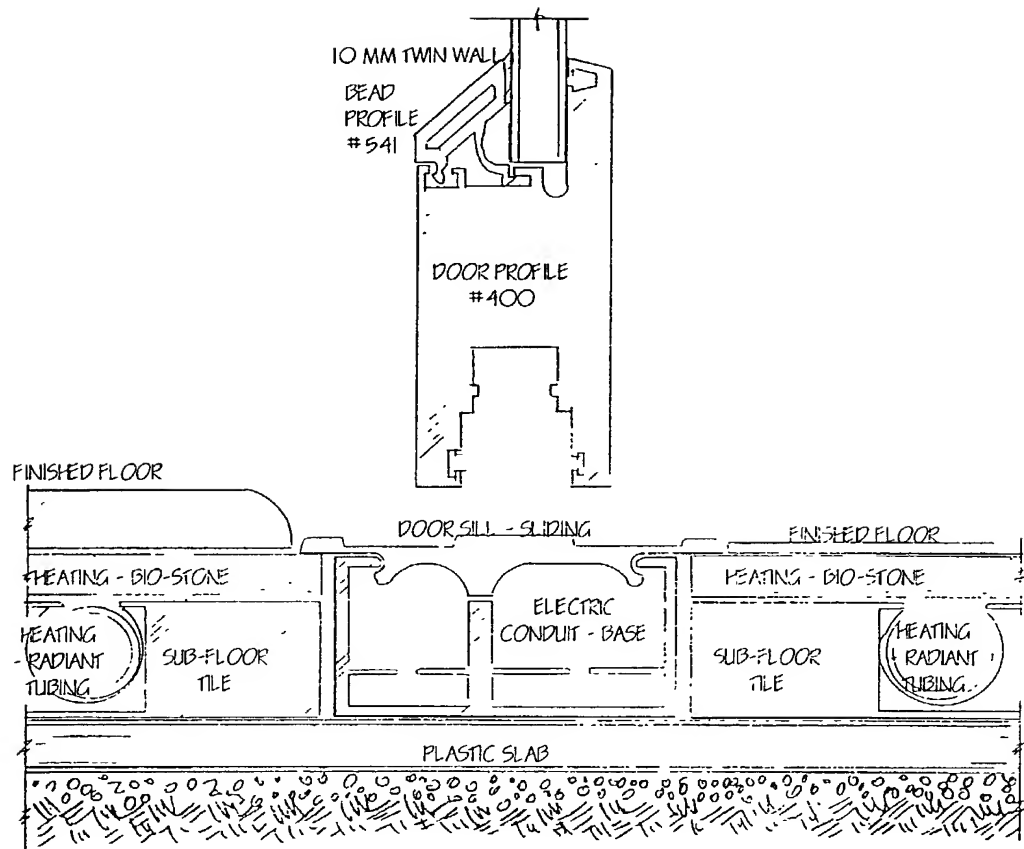

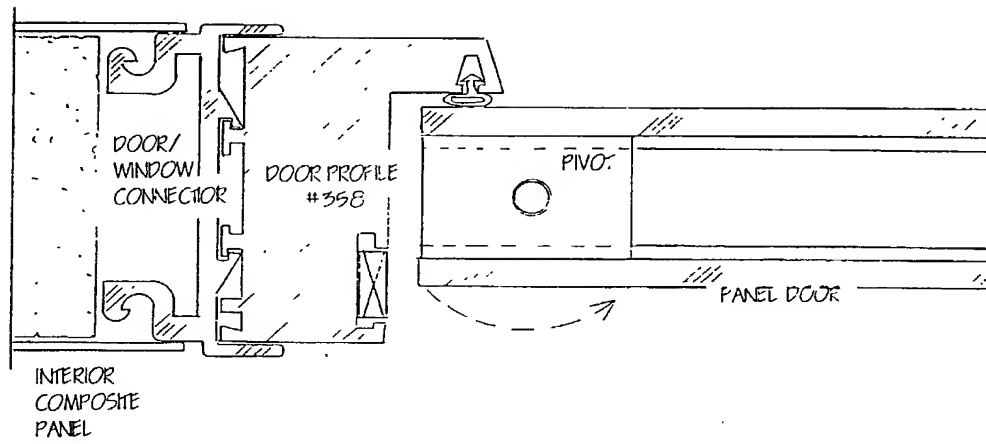


WO 00/68523

PCT/US00/12795

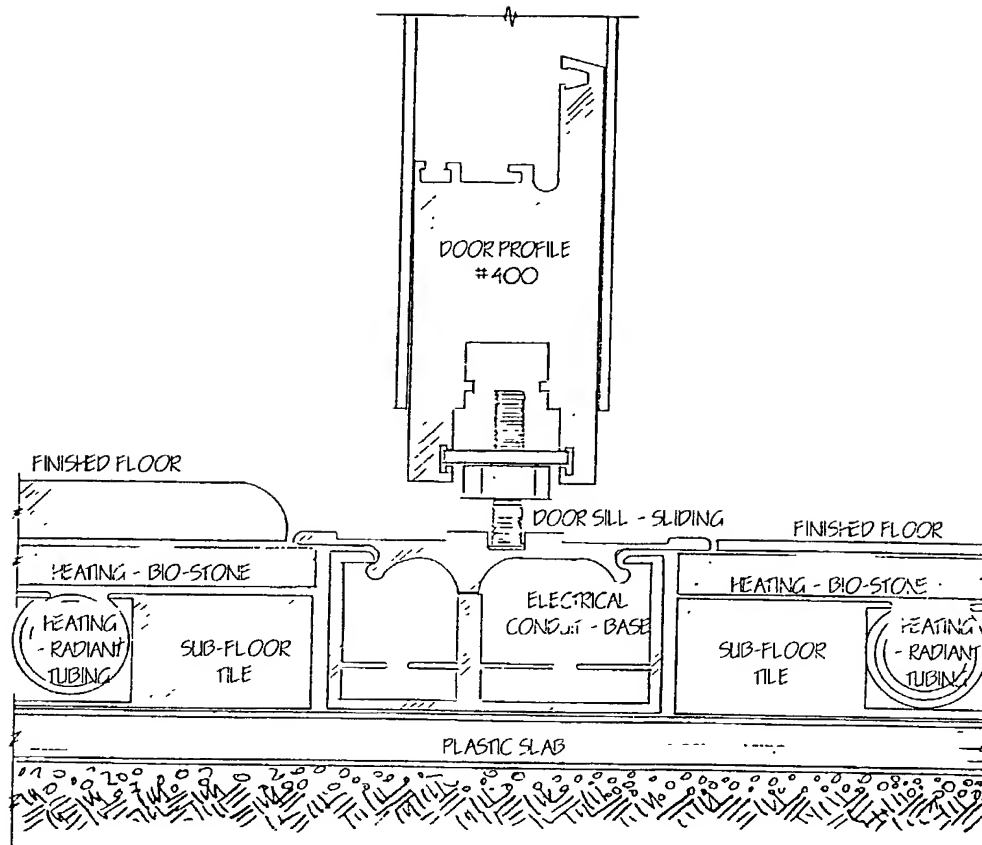


WO 00/68523

PCT/US00/12795

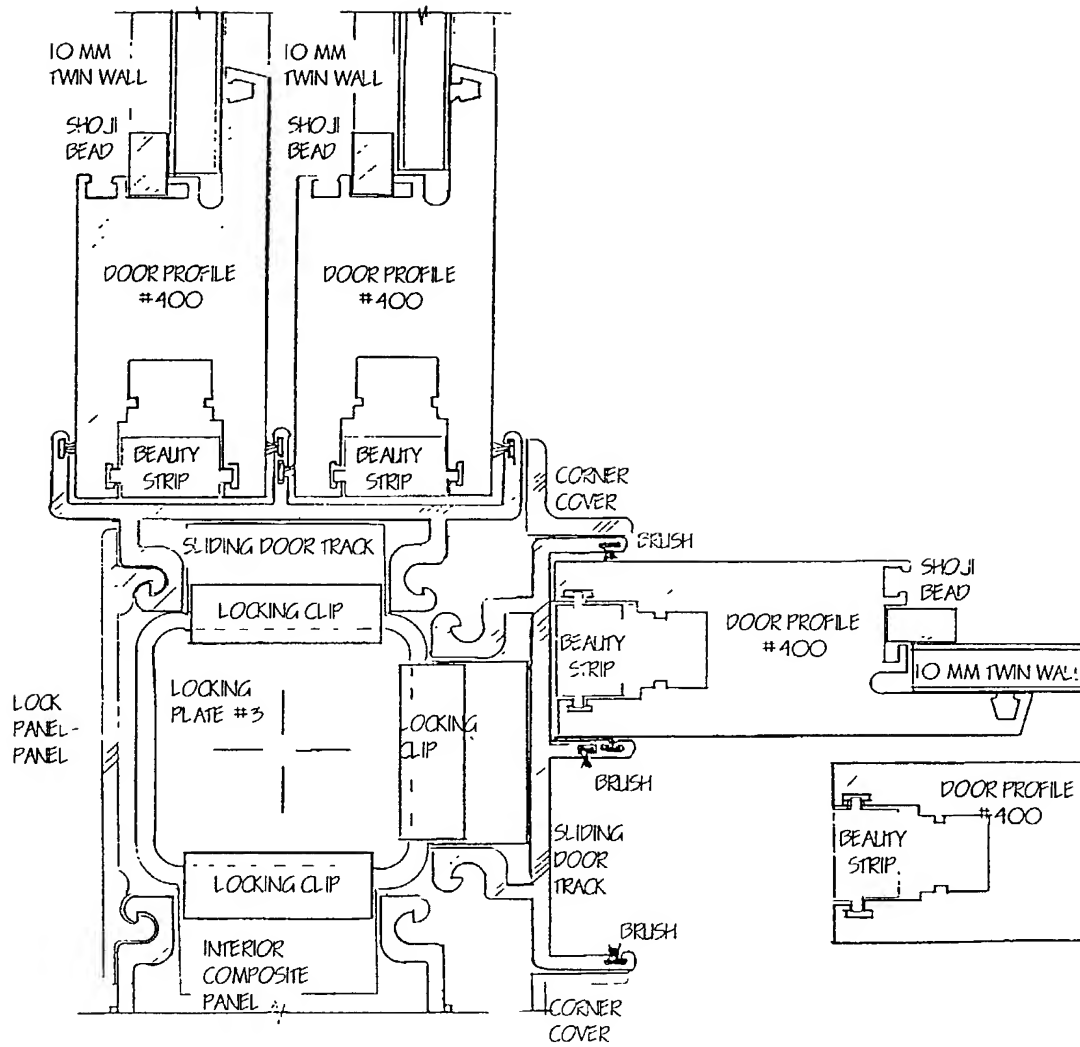


WO 00/68523

PCT/US00/12795

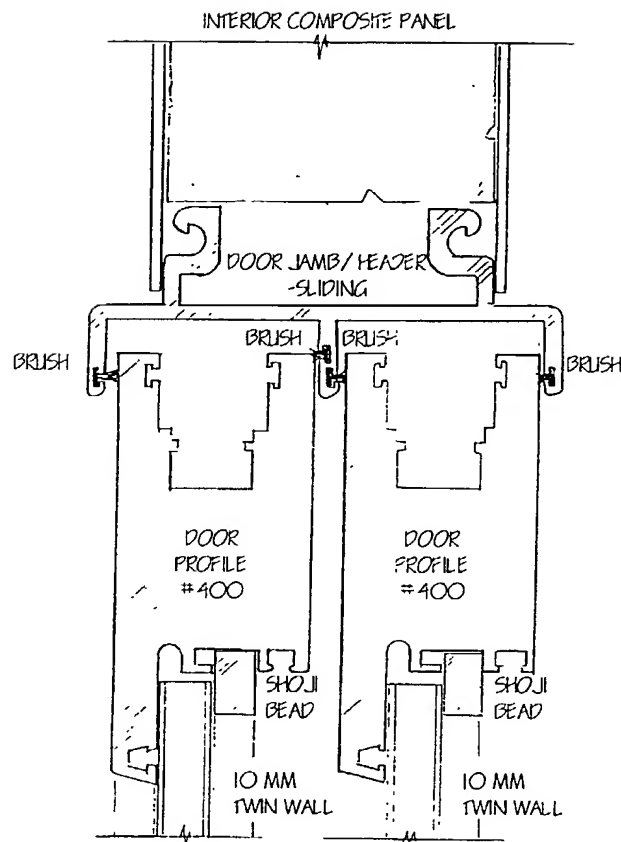


WO 00/68523

PCT/US00/12795

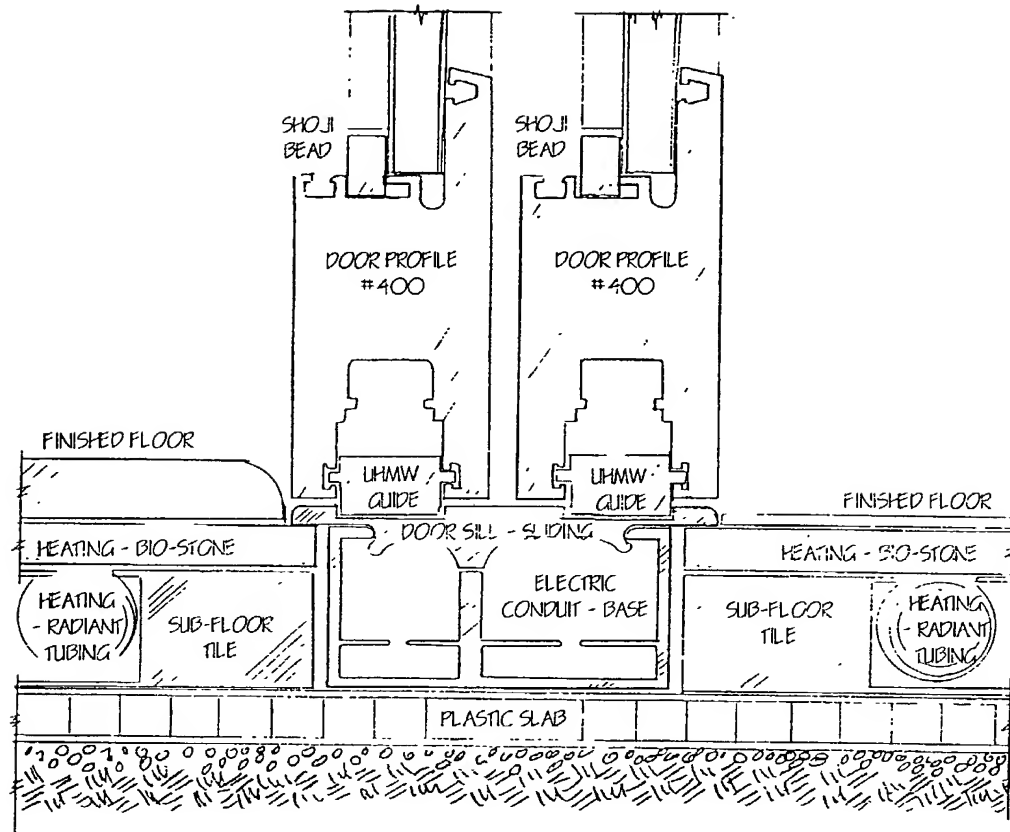

WO 00/68523

PCT/US00/12795

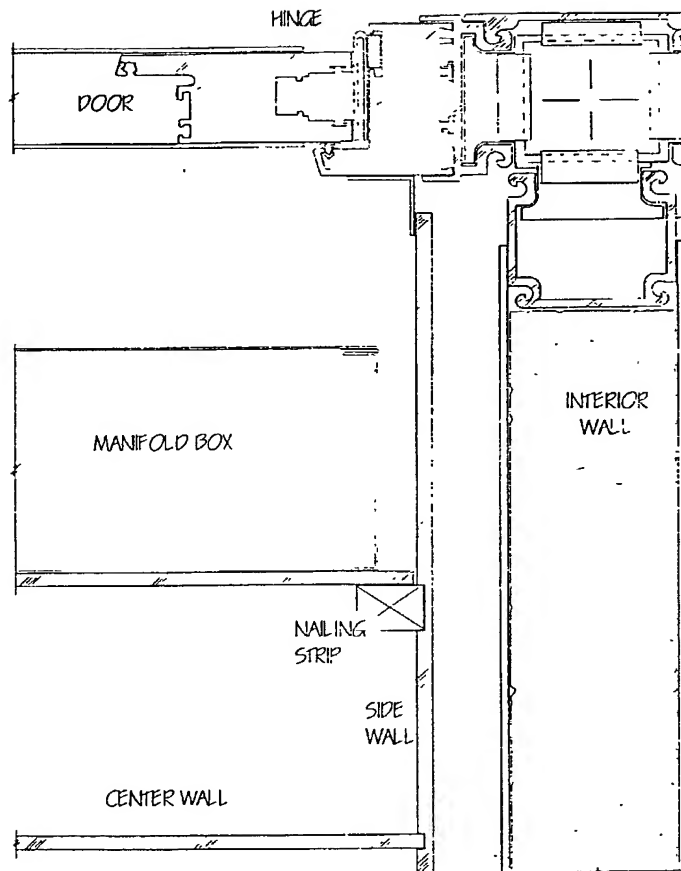

INDEX: ROOF FRAME AND RIDGE MOTOR


DRAWING	DESCRIPTION
RF01A-019	SECTION @ WINDOW/DOOR @ EAVE
RF01B-019	SECTION @ EAVE
RF02A-019	SECTION @ COMBO ROOF
RF02B-019	SECTION @ MOVING ROOF
RF02C-019	SECTION @ MOVING ROOF
RF03A-019	SECTION @ ROOF @ OUTSIDE CORNER
RF03B-019	SECTION @ FIXED ROOF
RF03C-019	SECTION @ MOVING ROOF
RF04A-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04B-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04C-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04D-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04E-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF05A-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
RF05B-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
RF05C-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
RF06A-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06B-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06C-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06D-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06E-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RM01A-019	SECTION @ RIDGE @ RAFTER
RM01B-019	SECTION @ RIDGE @ RAFTER
RM01C-019	SECTION @ RIDGE @ RAFTER
RM02A-019	SECTION @ RAFTER @ RIDGE
RM03A-019	PLAN @ RAFTER @ RIDGE
RM03B-019	PLAN @ RAFTER @ RIDGE
RM04A-019	SECTION @ RIDGE @ PANEL
RM04B-019	SECTION @ RIDGE @ PANEL
RM05A-019	SECTION @ RIDGE - FIXED
RM05B-019	SECTION @ RIDGE - FIXED
RM06A-019	SECTION @ RIDGE @ RIDGE BEAM
RM07A-019	PLAN @ PANEL @ RIDGE

10009369.060602

10/009369


WO 00/68523

PCT/US00/12795

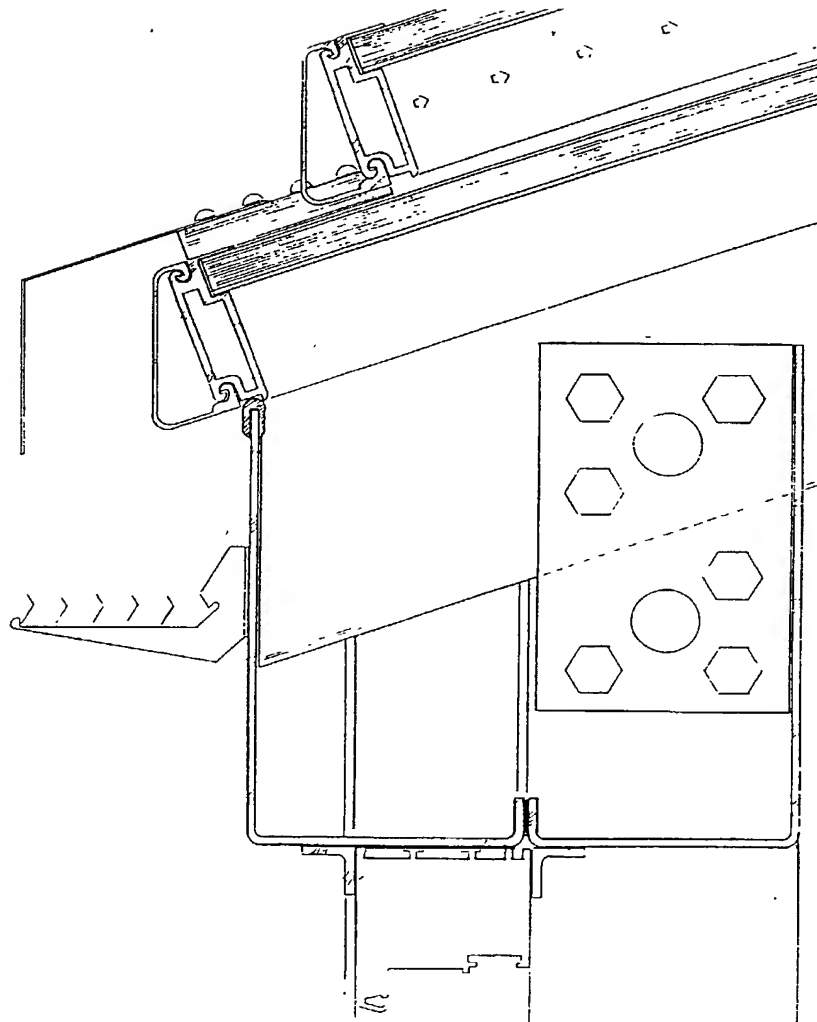

WO 00/68523

PCT/US00/12795

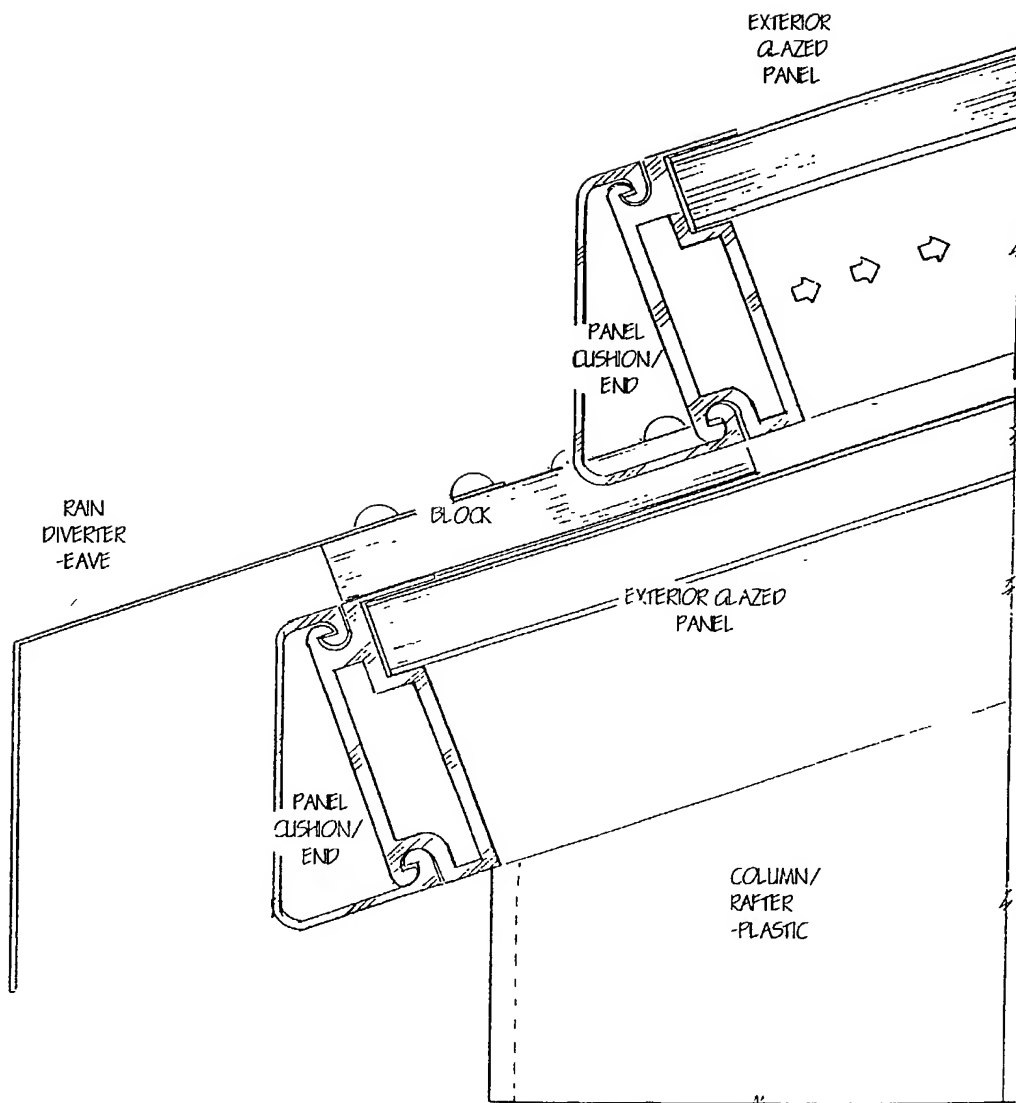



10009369 060602

10/009369

WO 00/68523


PCT/US00/12795

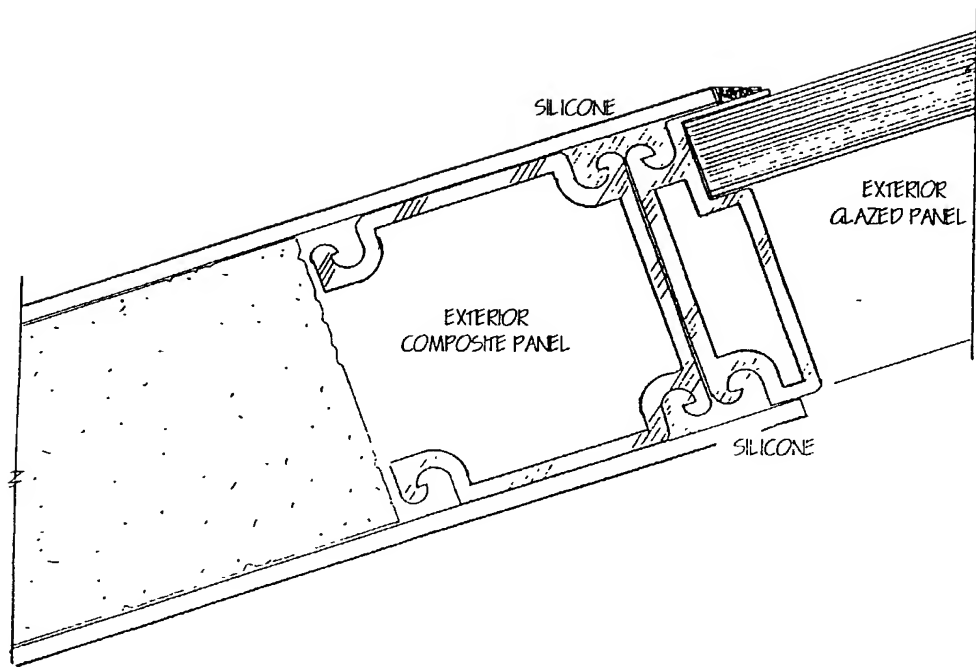


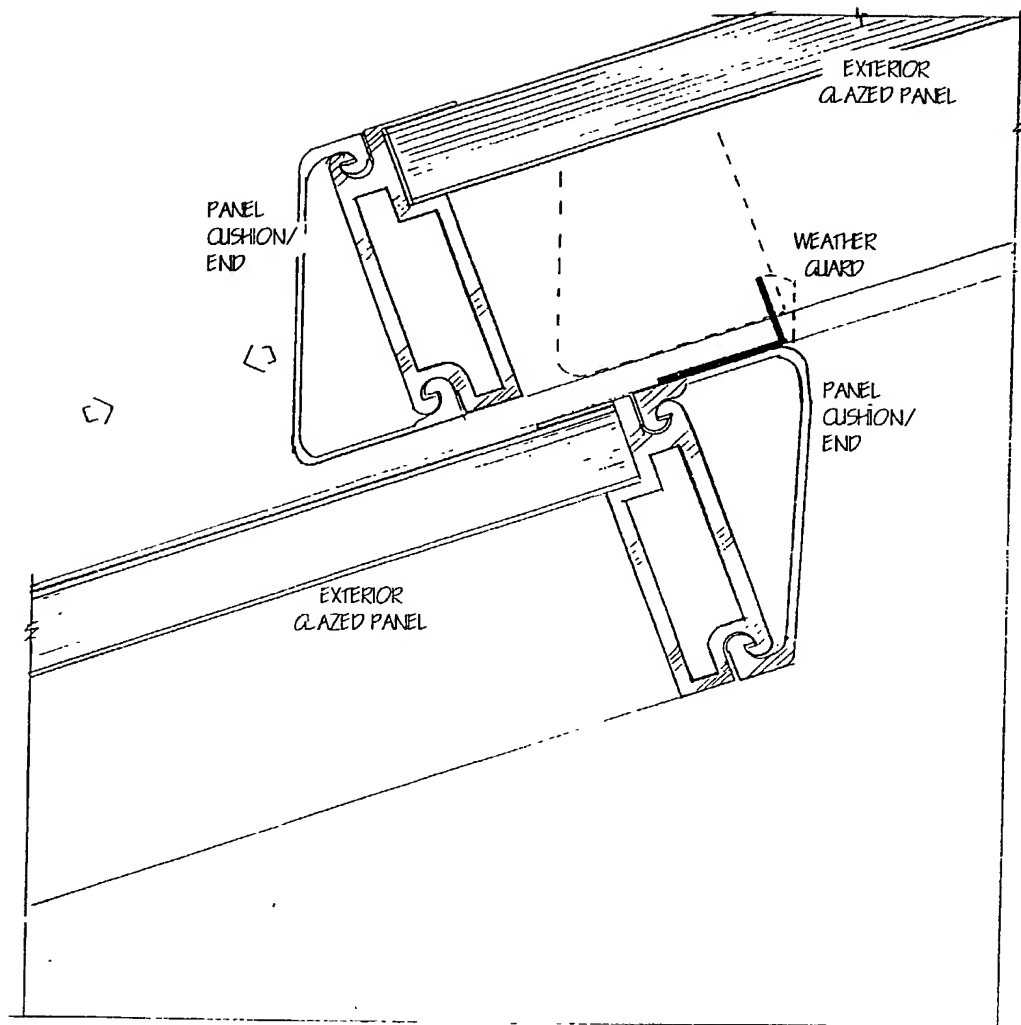

WO 00/68523


PCT/US00/12795

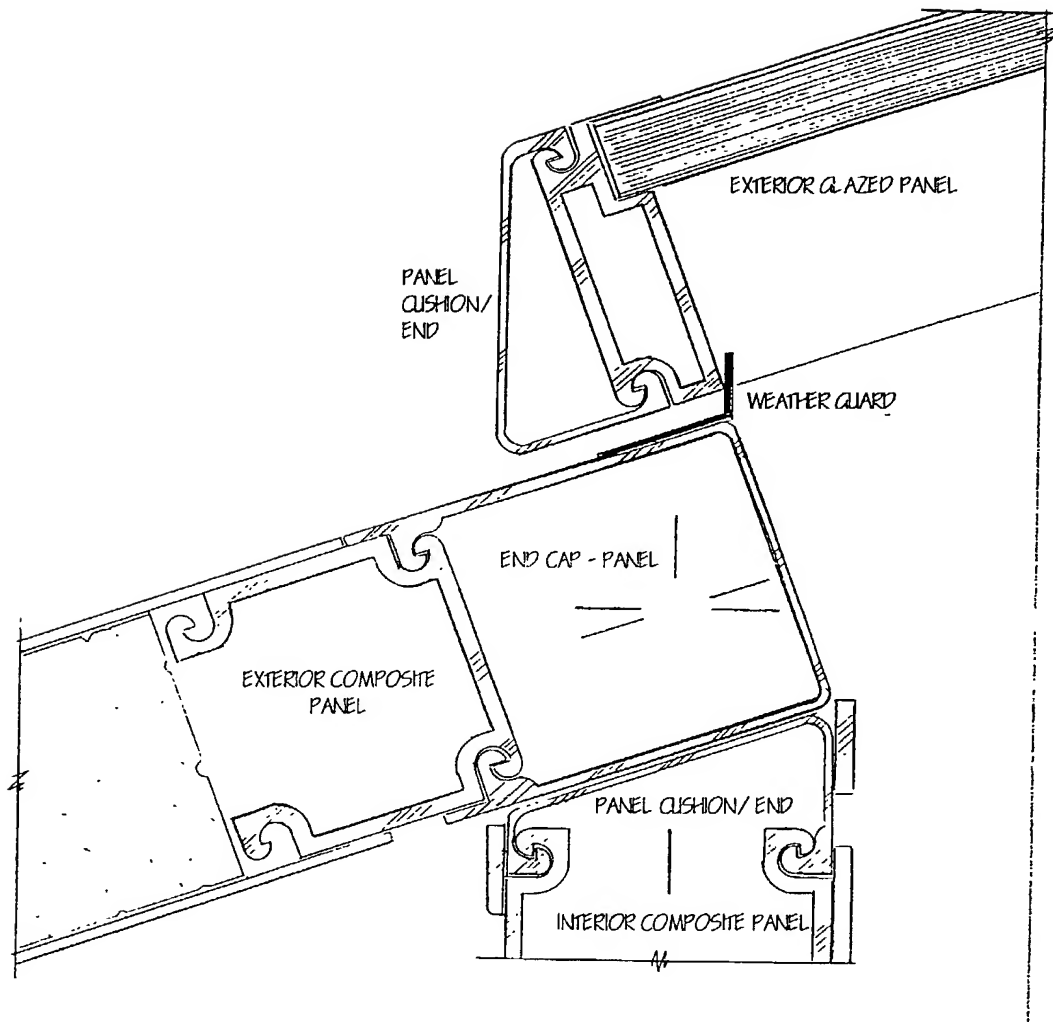

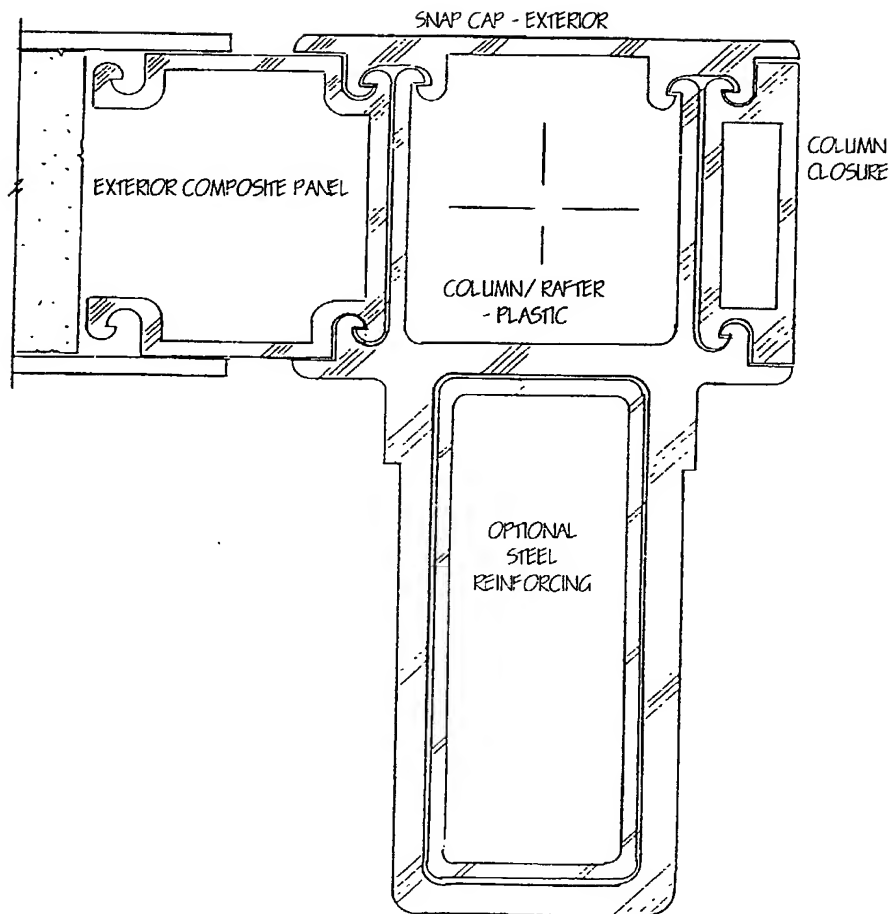


WO 00/68523

PCT/US00/12795

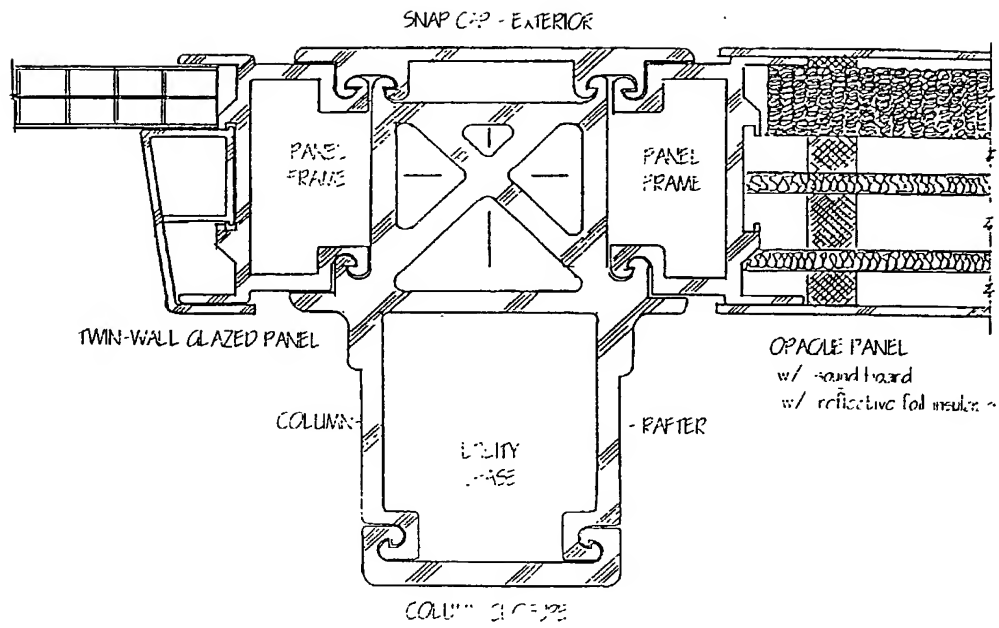


WO 00/68523

PCT/US00/12795

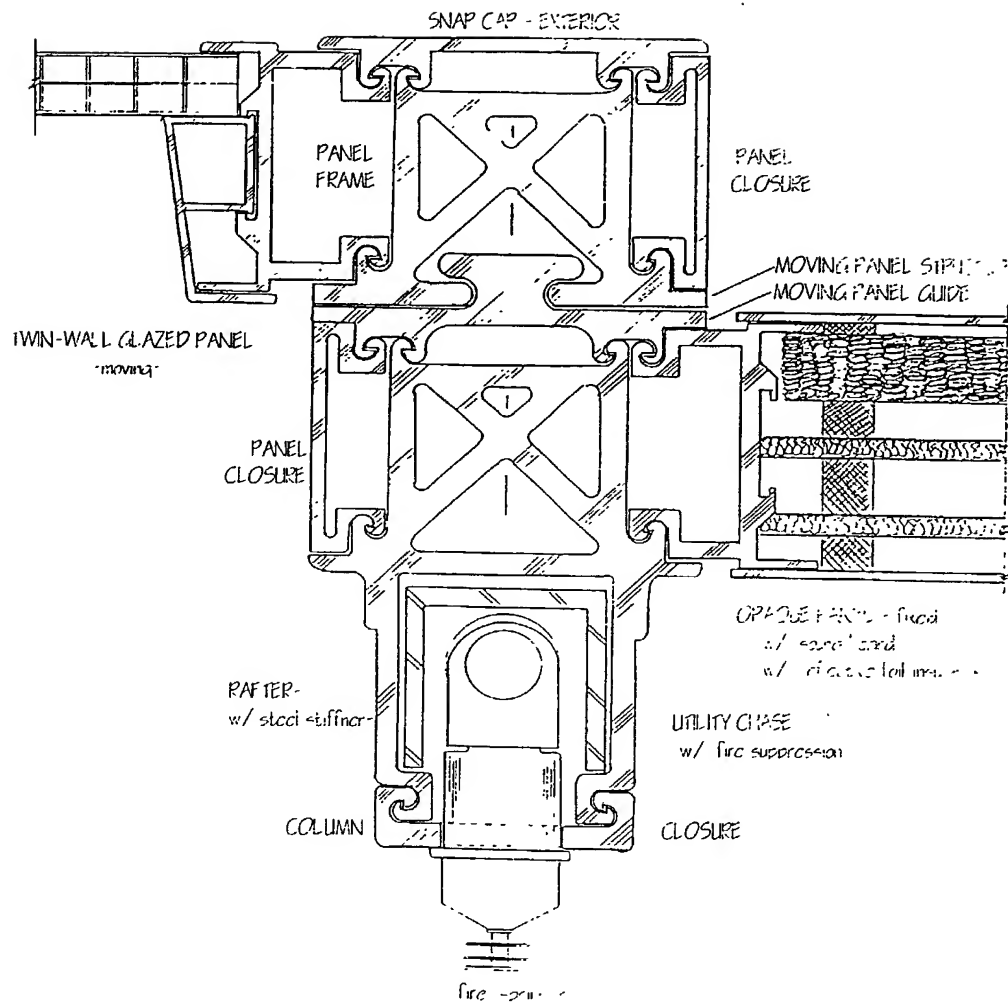


WO 00/68523

PCT/US00/12795

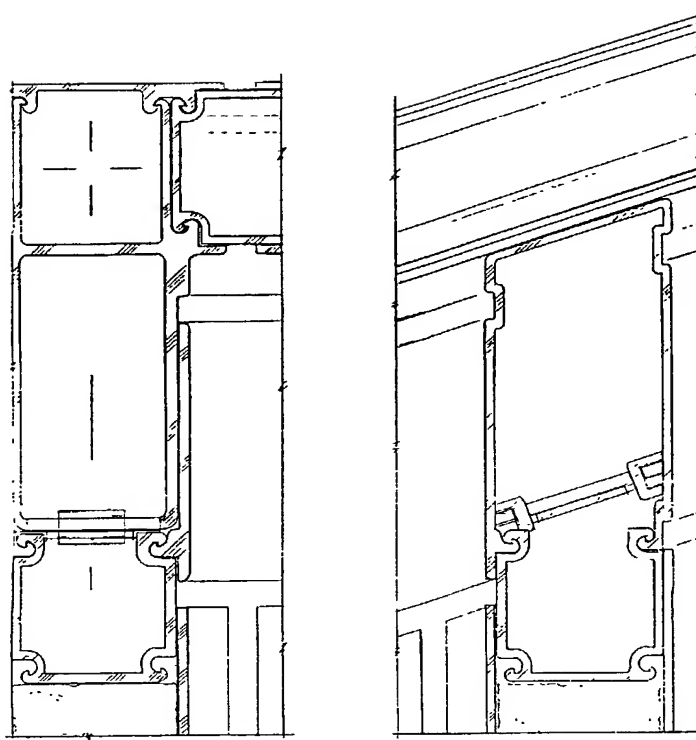



PCT/US00/12795

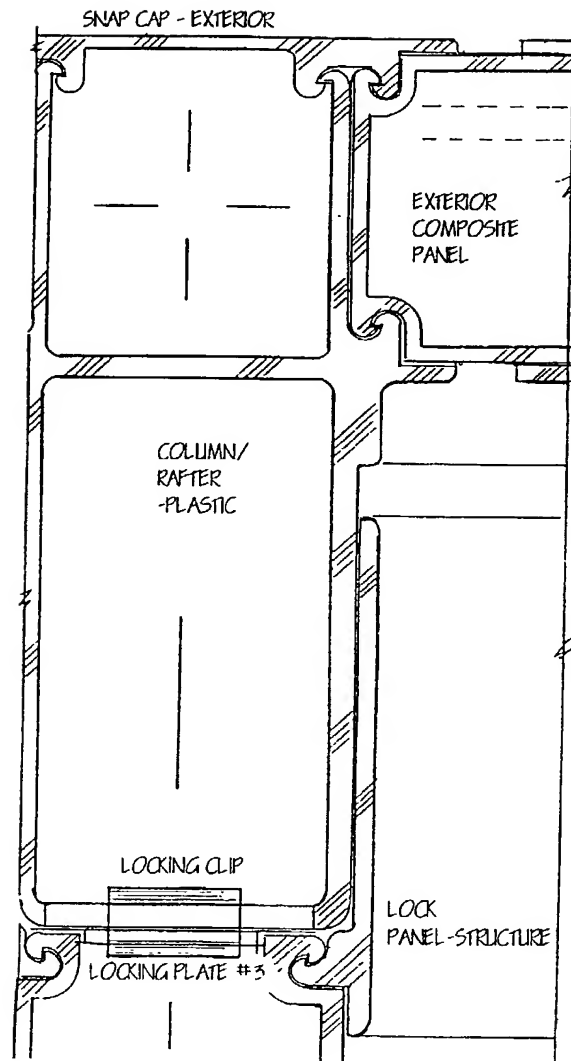

WO 00/68523


PCT/US00/12795

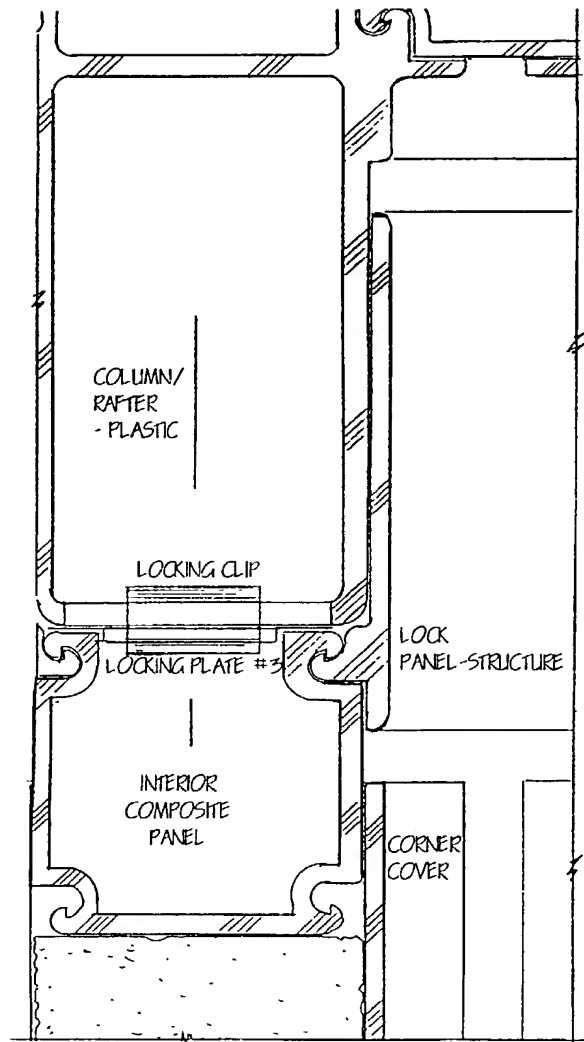

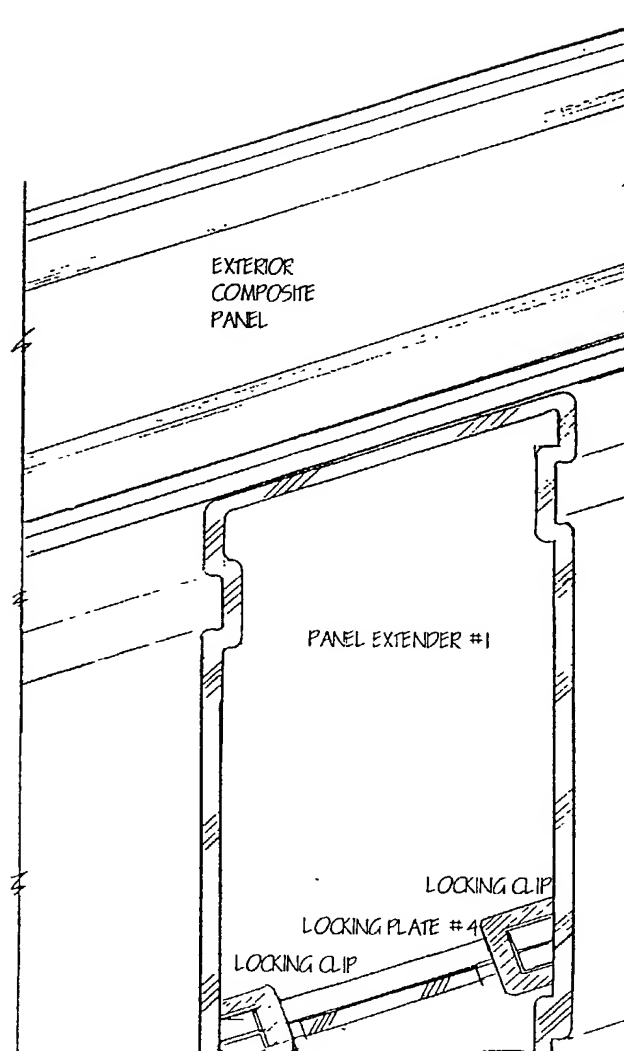

WO 00/68523


PCT/US00/12795

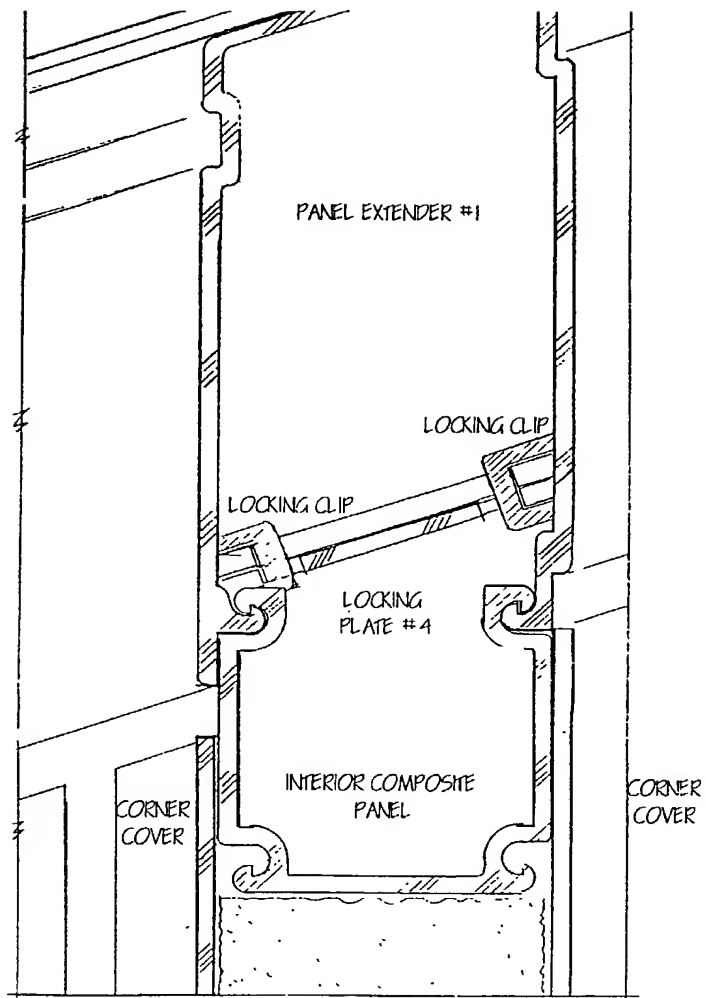

10009369 .060602


WO 00/68523


10/009369
PCT/US00/12795

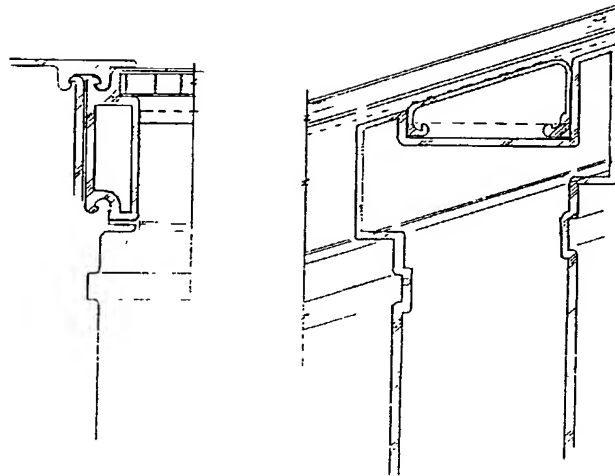

WO 00/68523


PCT/US00/12795

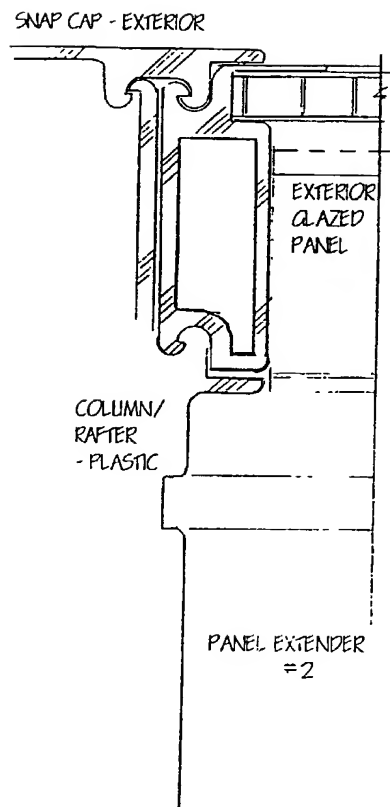

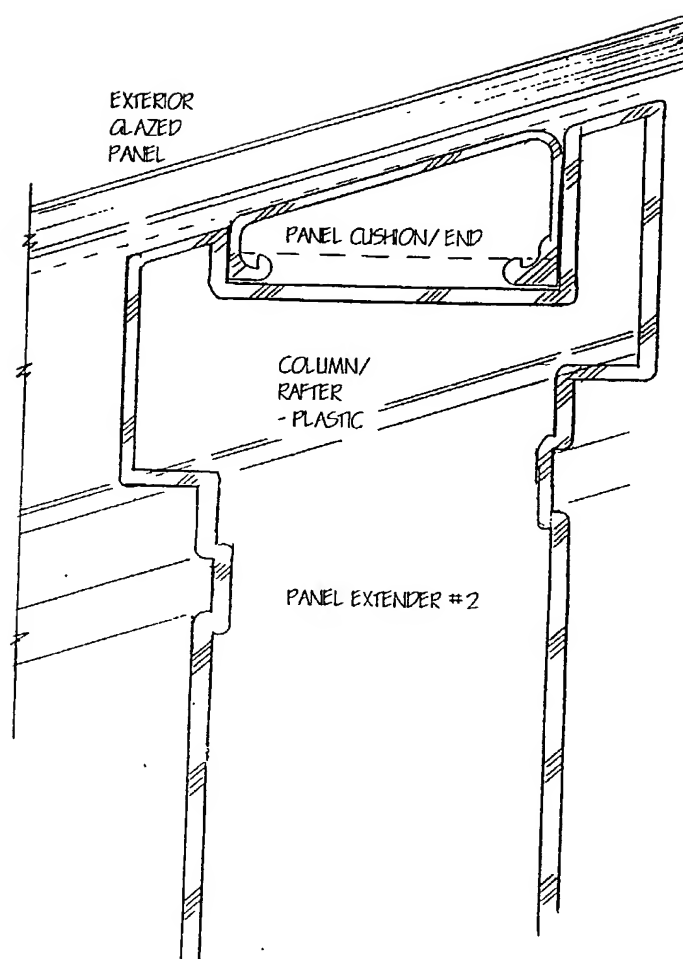


WO 00/68523

PCT/US00/12795

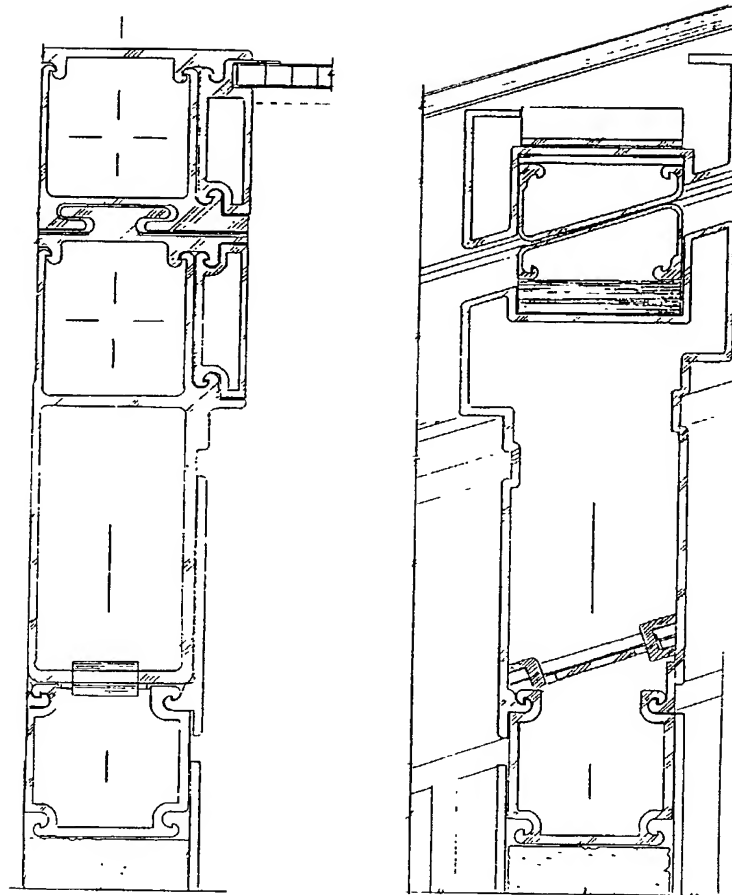


WO 00/68523


PCT/US00/12795

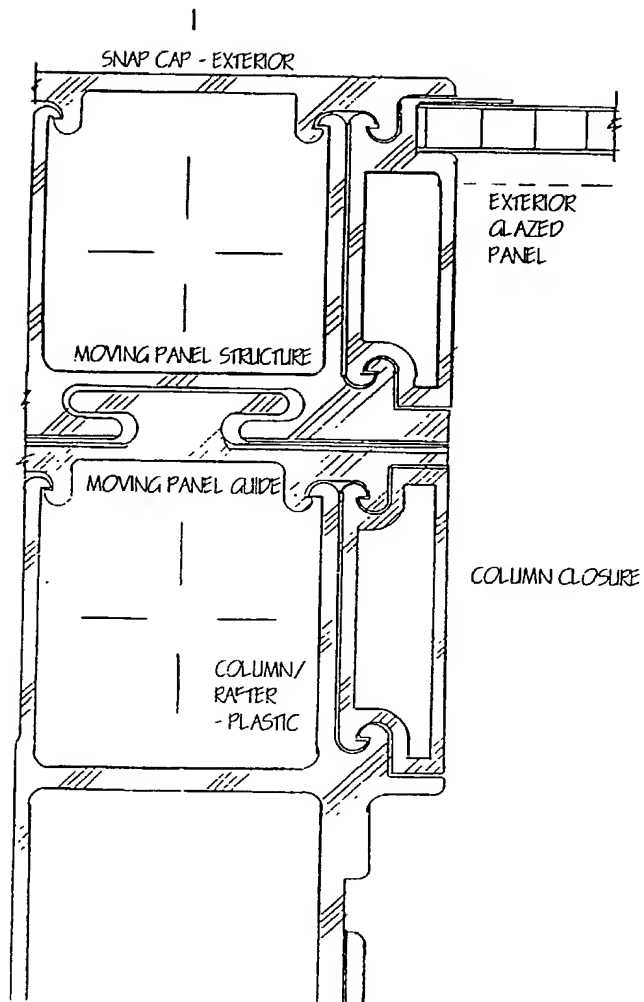

WO 00/68523


PCT/US00/12795

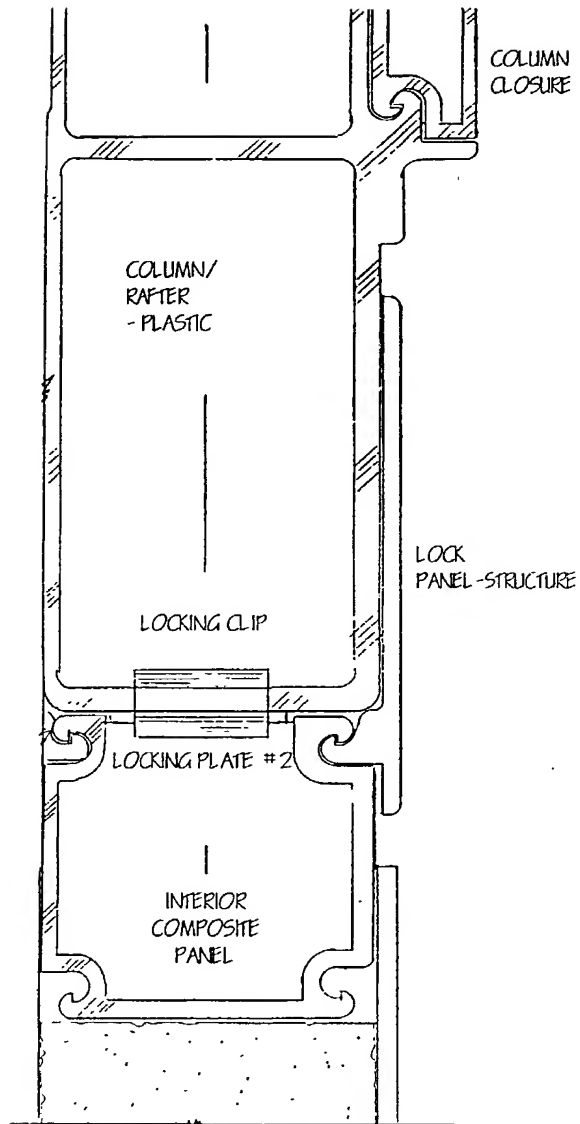

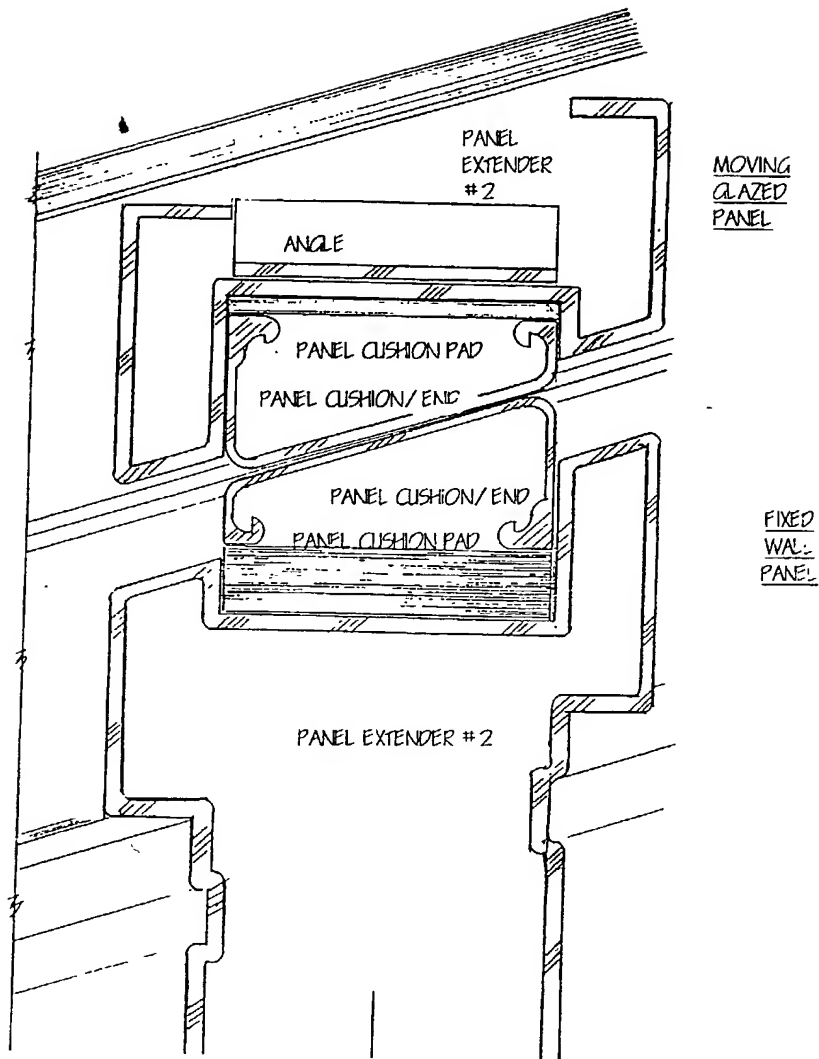


WO 00/68523


PCT/US00/12795

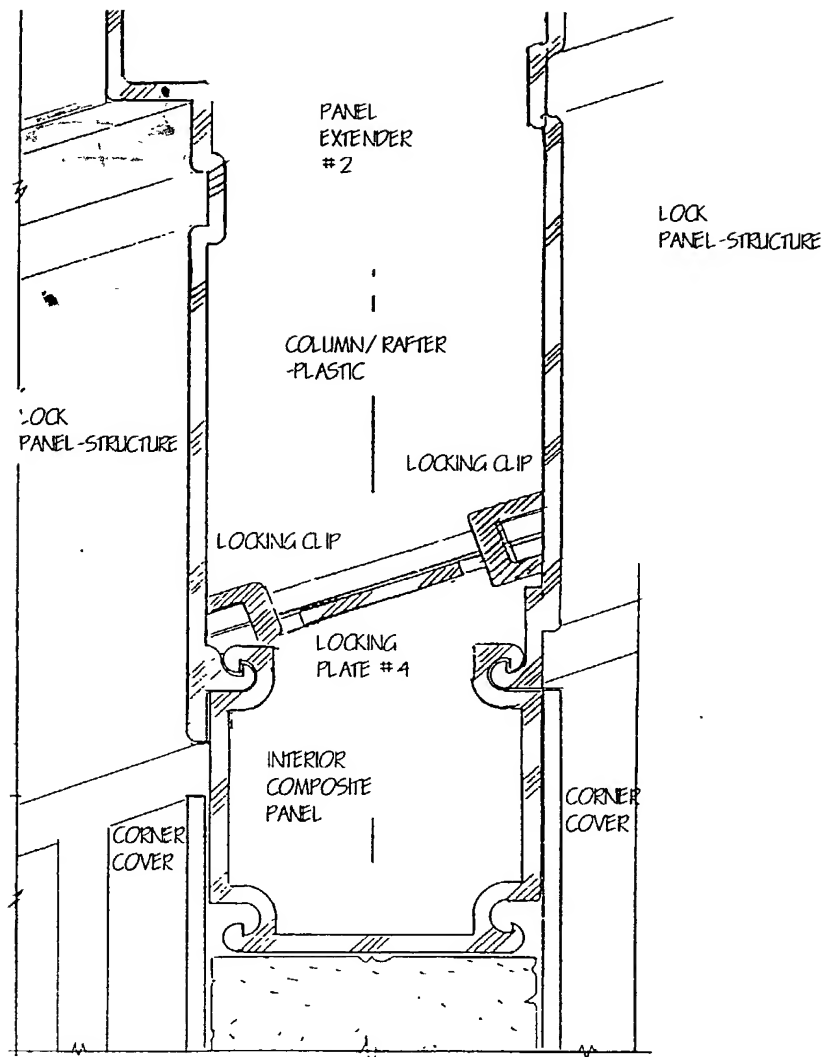



PCT/US00/12795




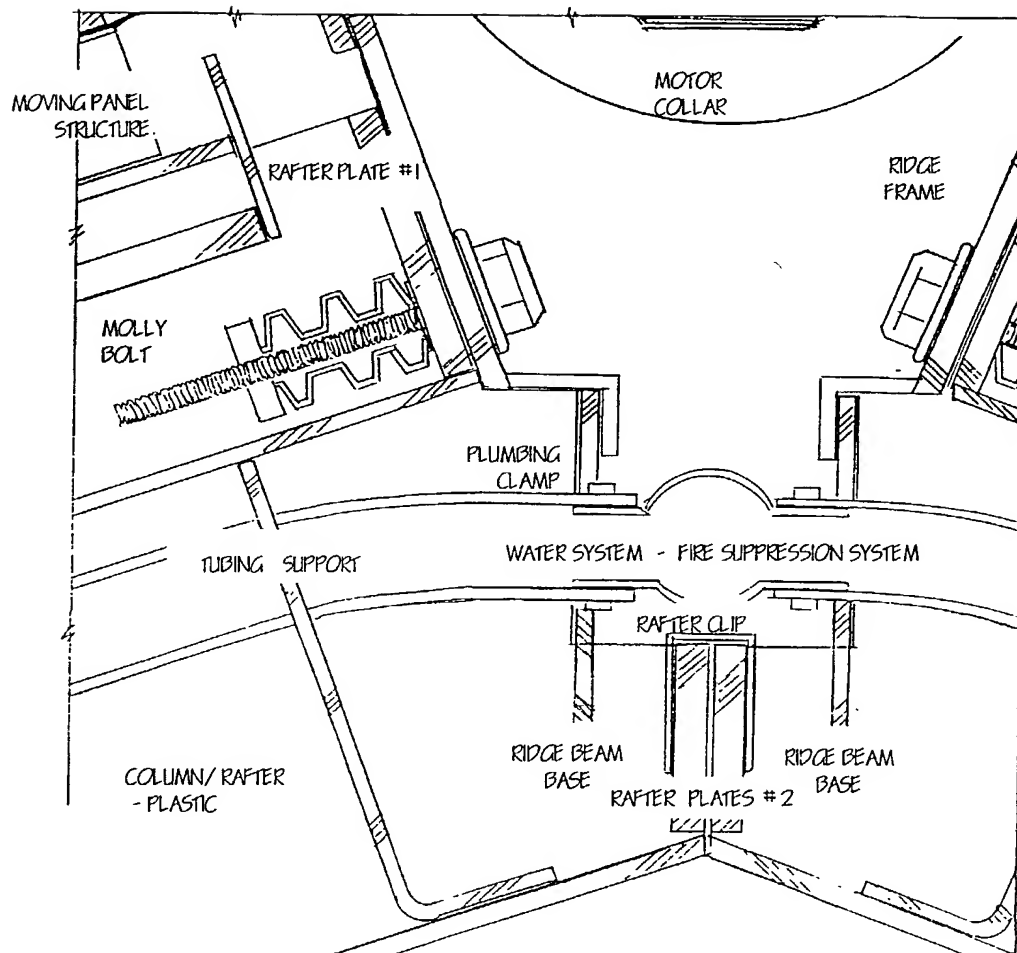


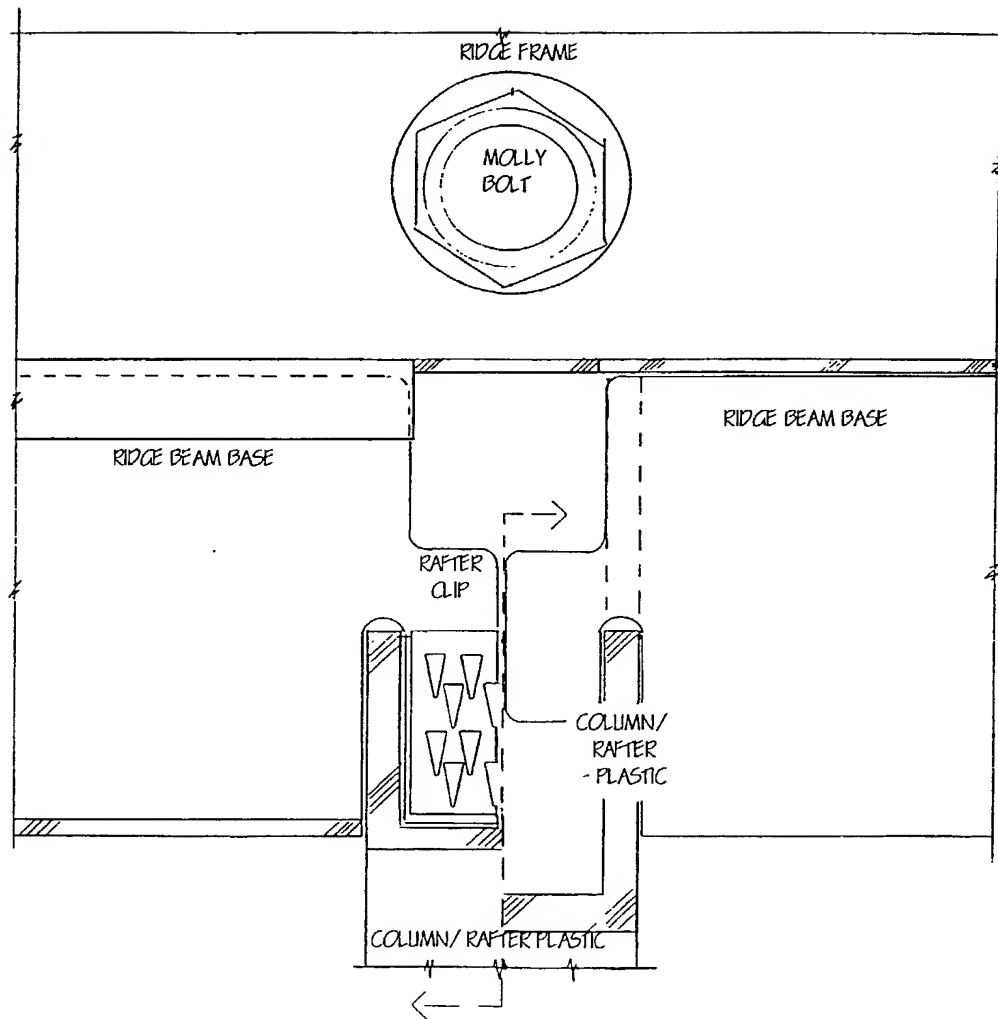

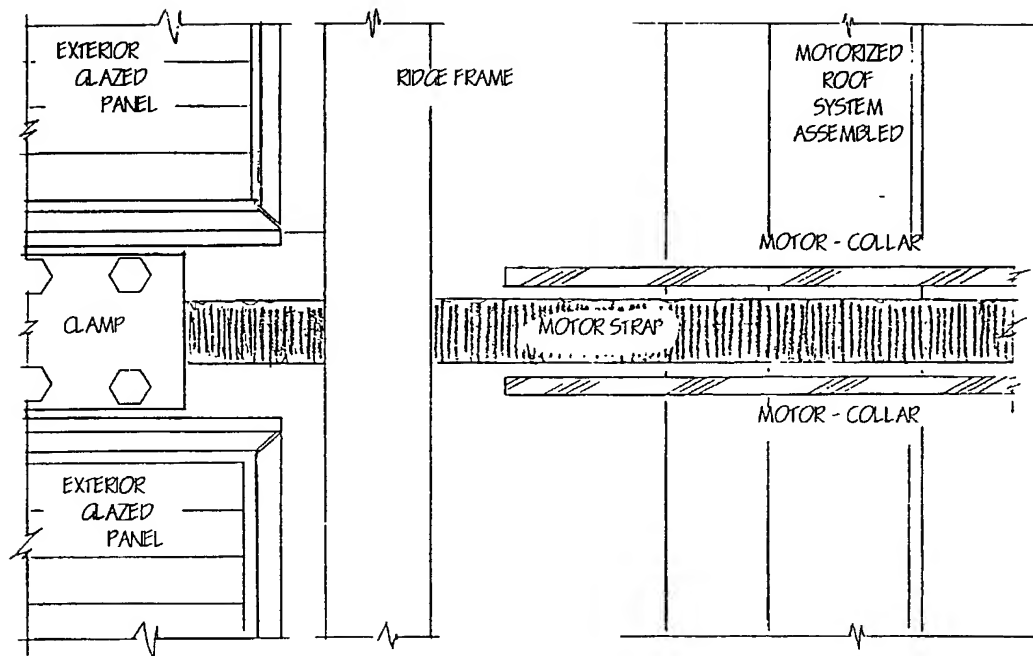

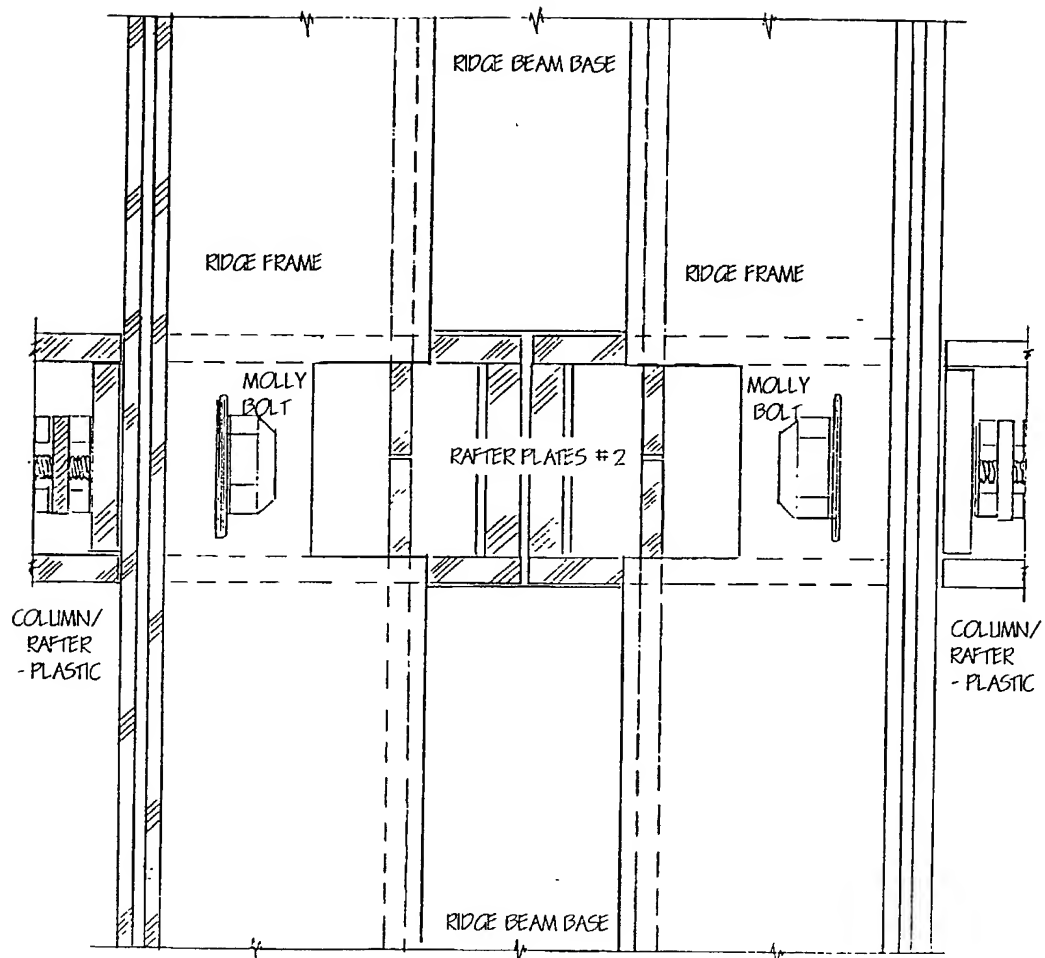


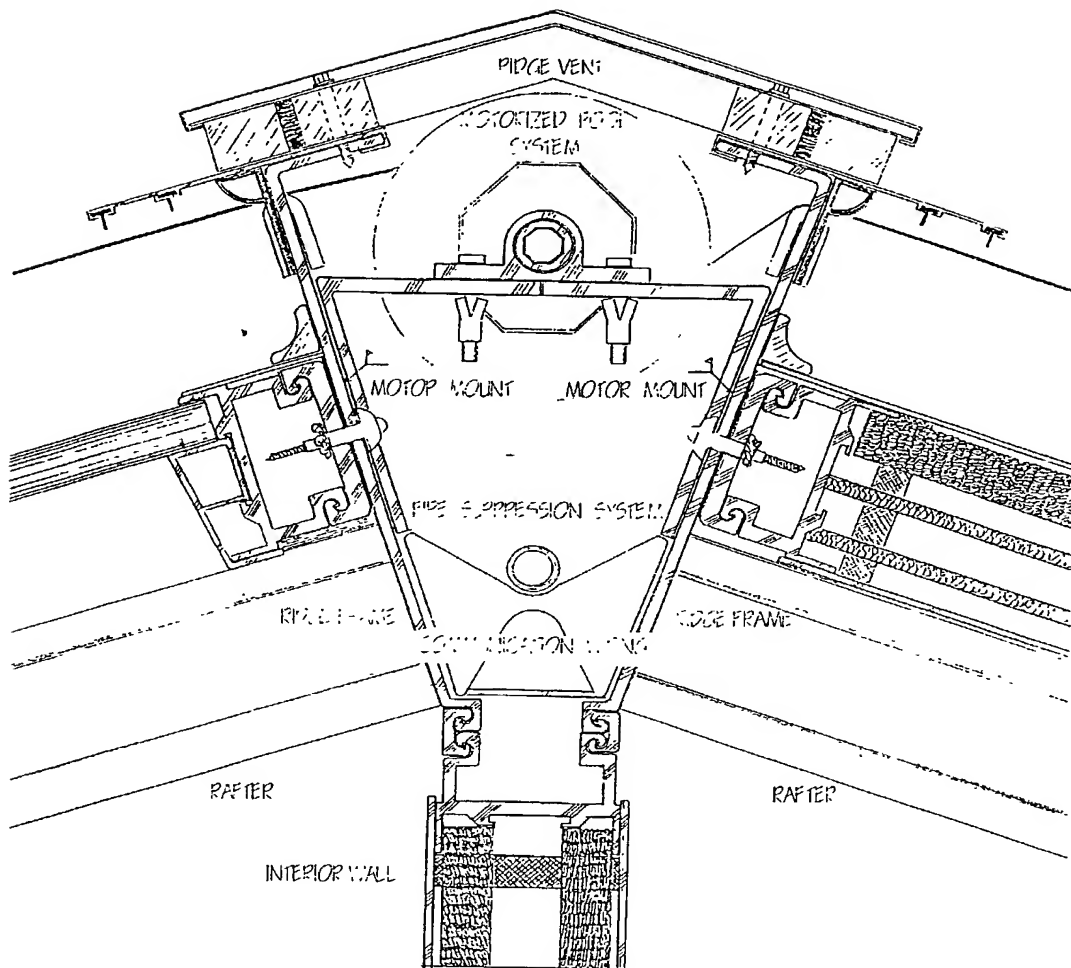


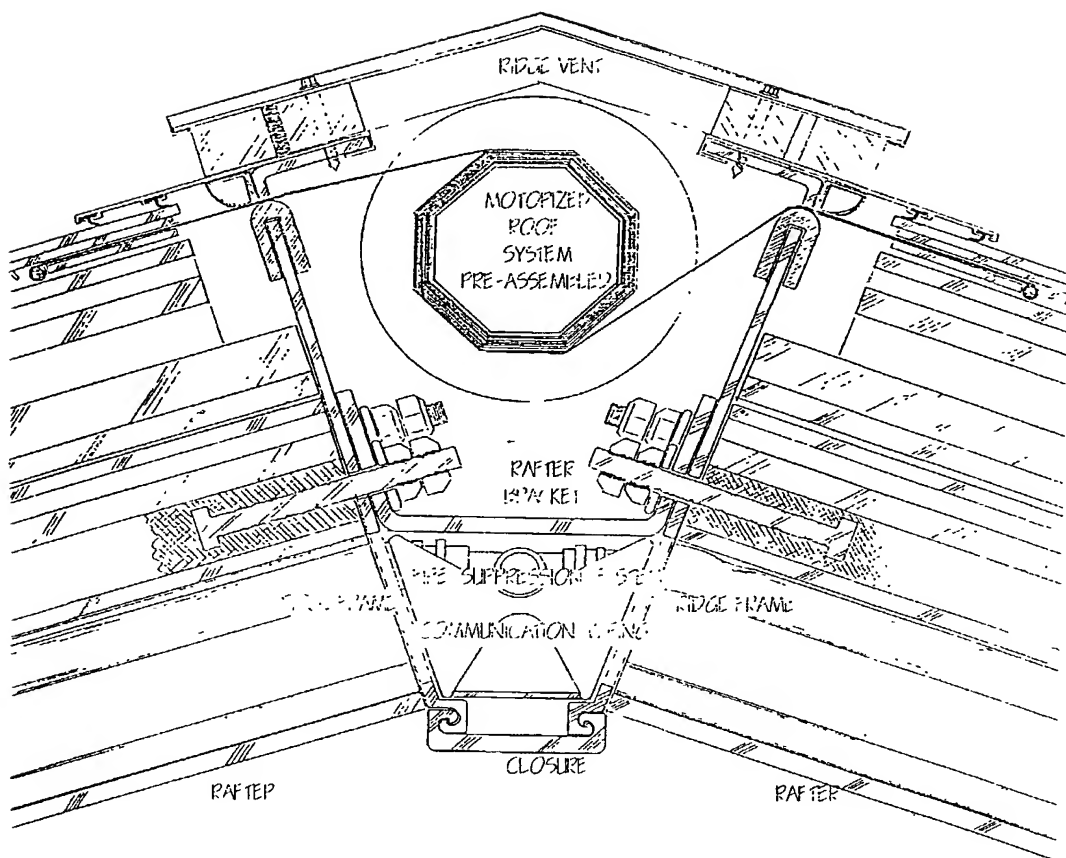

WO 00/68523

PCT/US00/12795

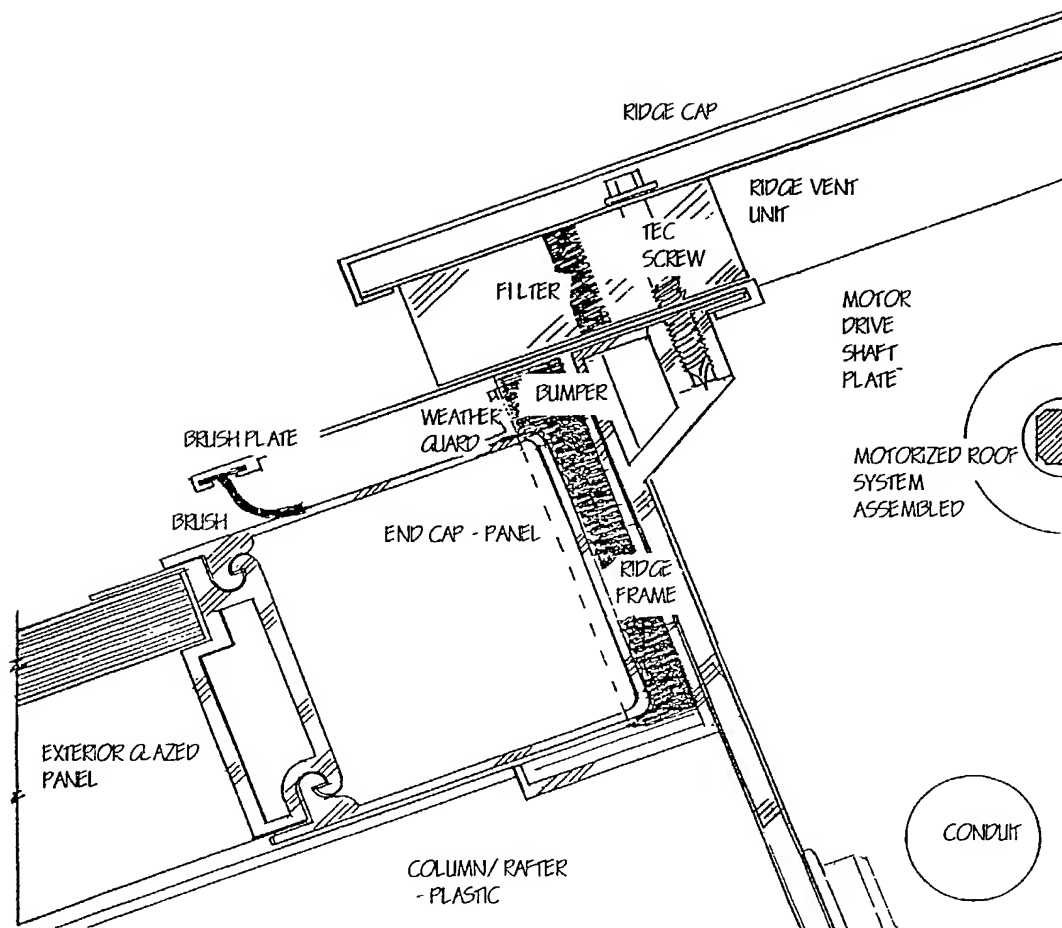


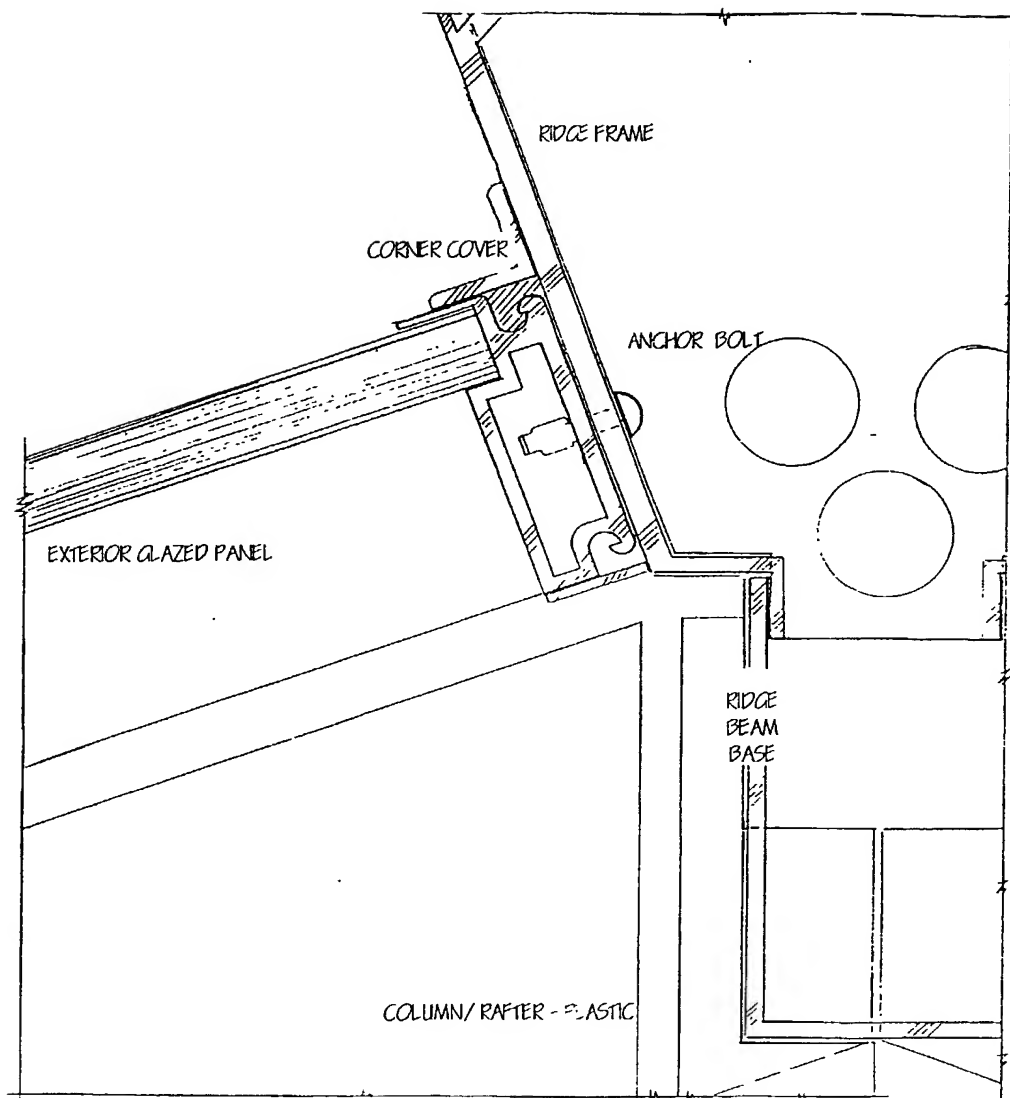

10009369 .060602
10/009369


WO 00/68523


PCT/US00/12795

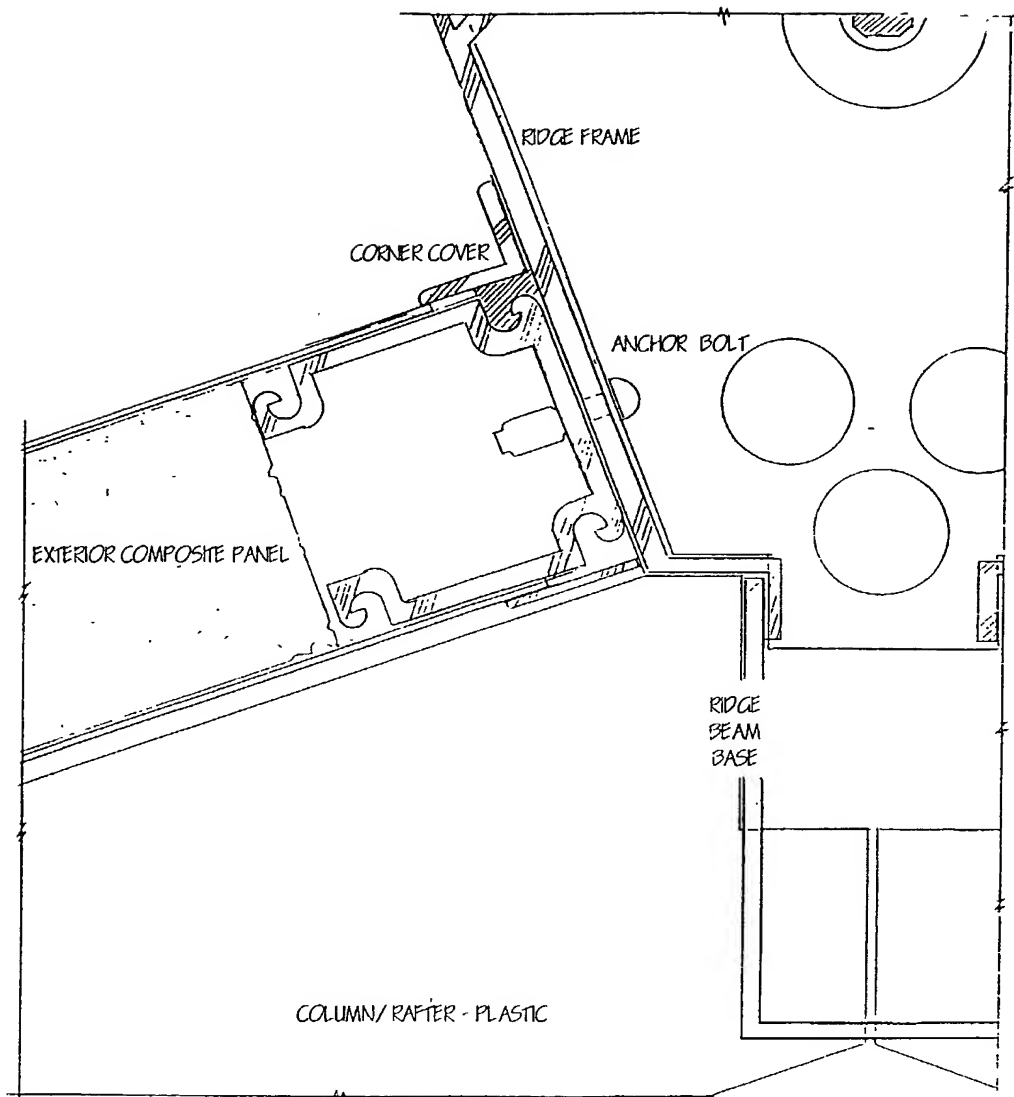

WO 00/68523


PCT/US00/12795

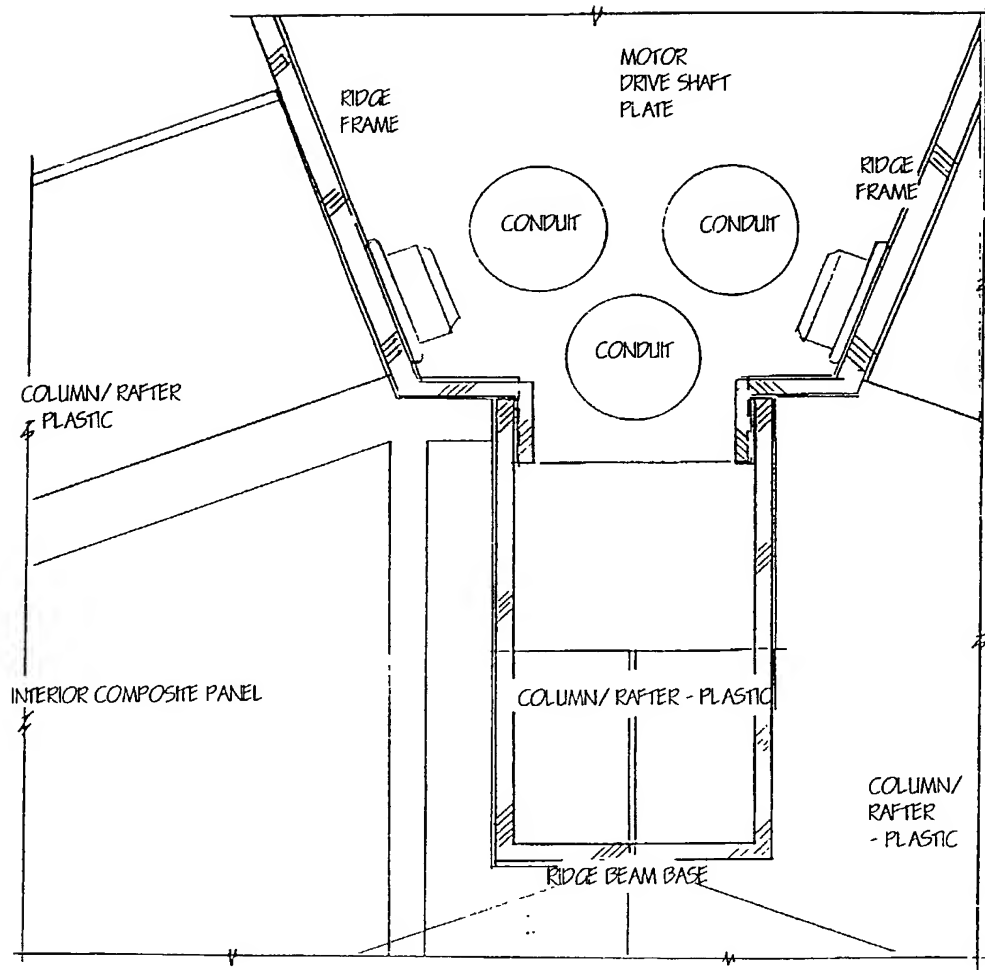


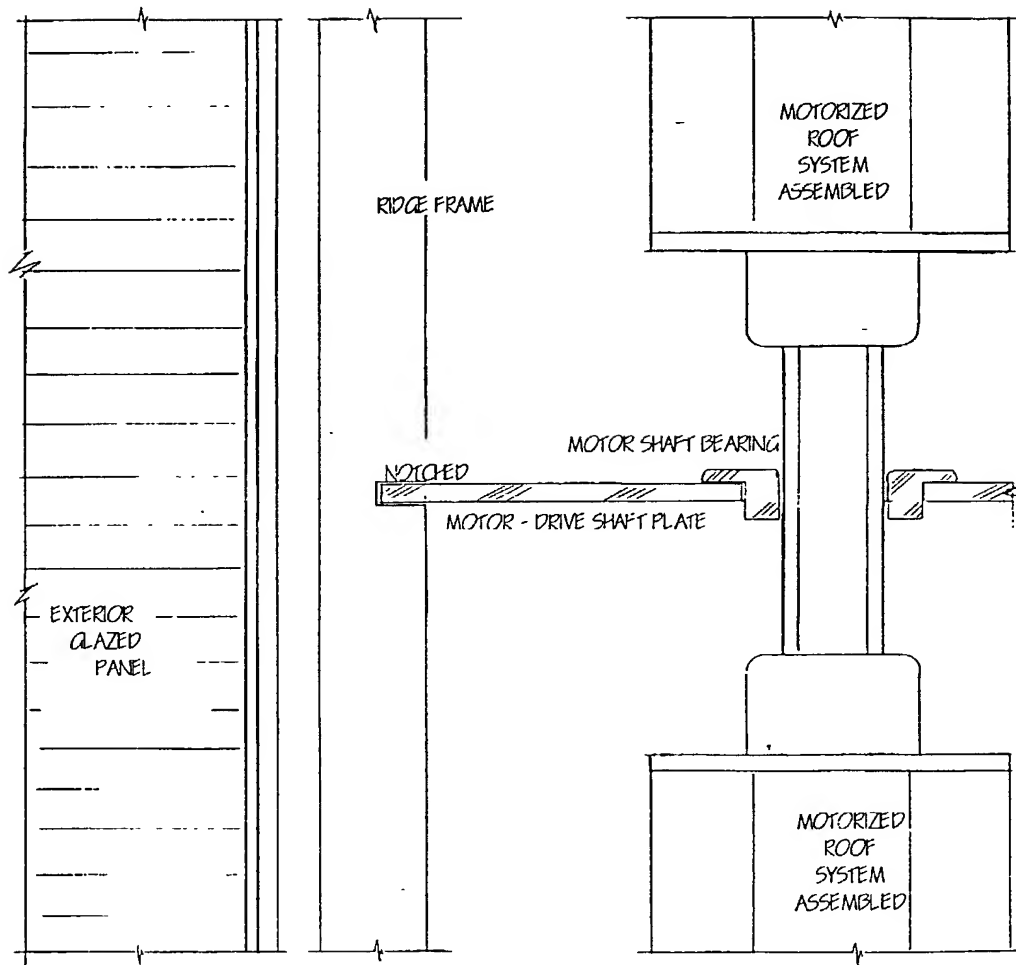

WO 00/68523


PCT/US00/12795

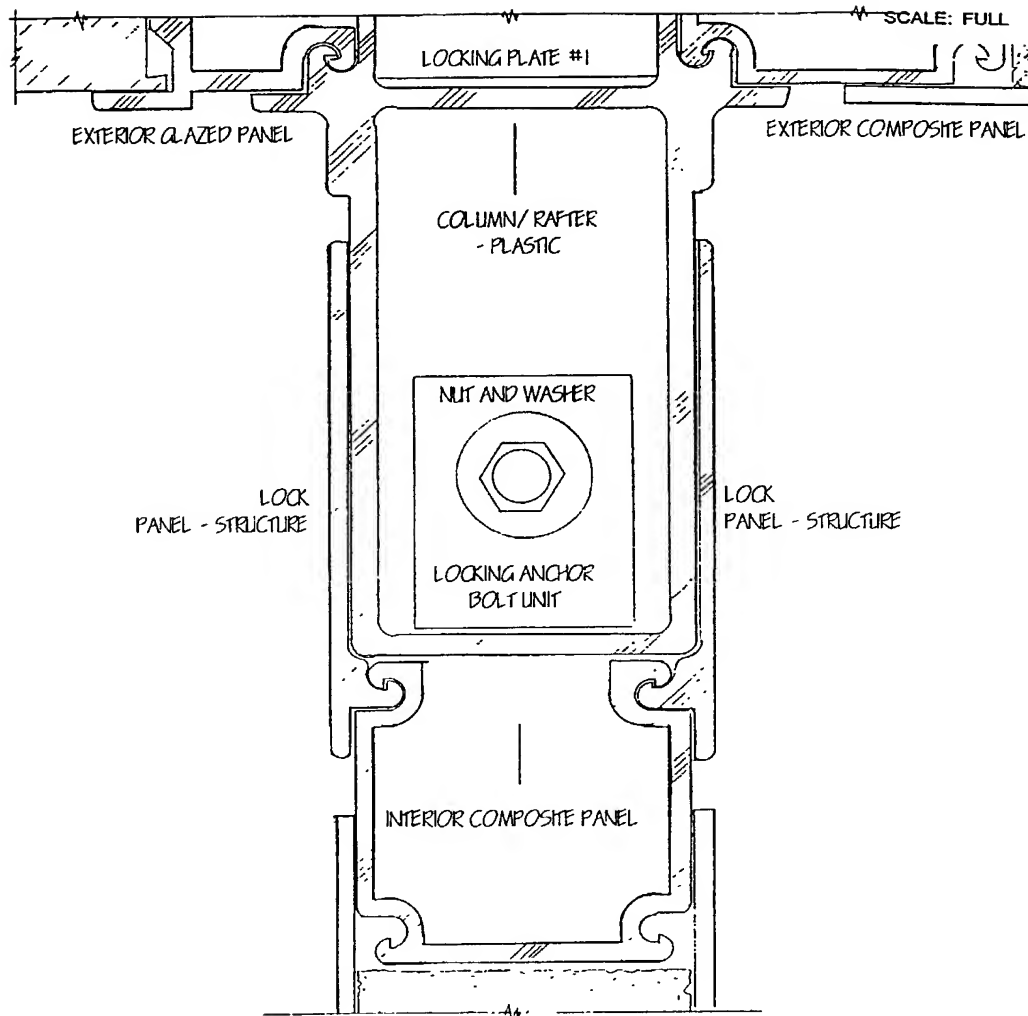

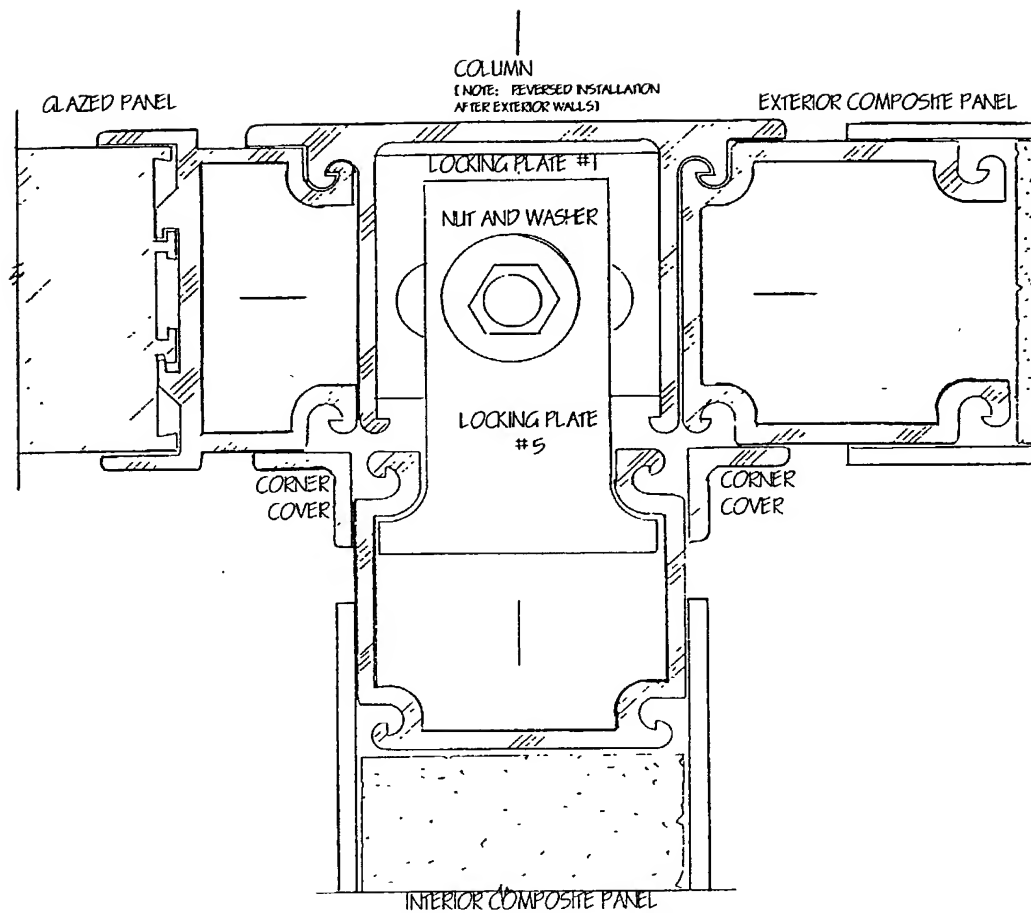


WO 00/68523

PCT/US00/12795

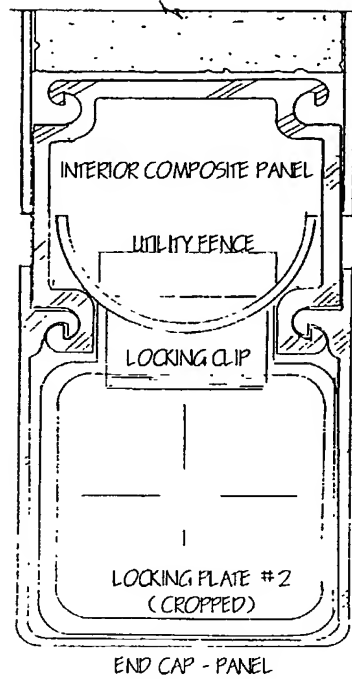


WO 00/68523

PCT/US00/12795

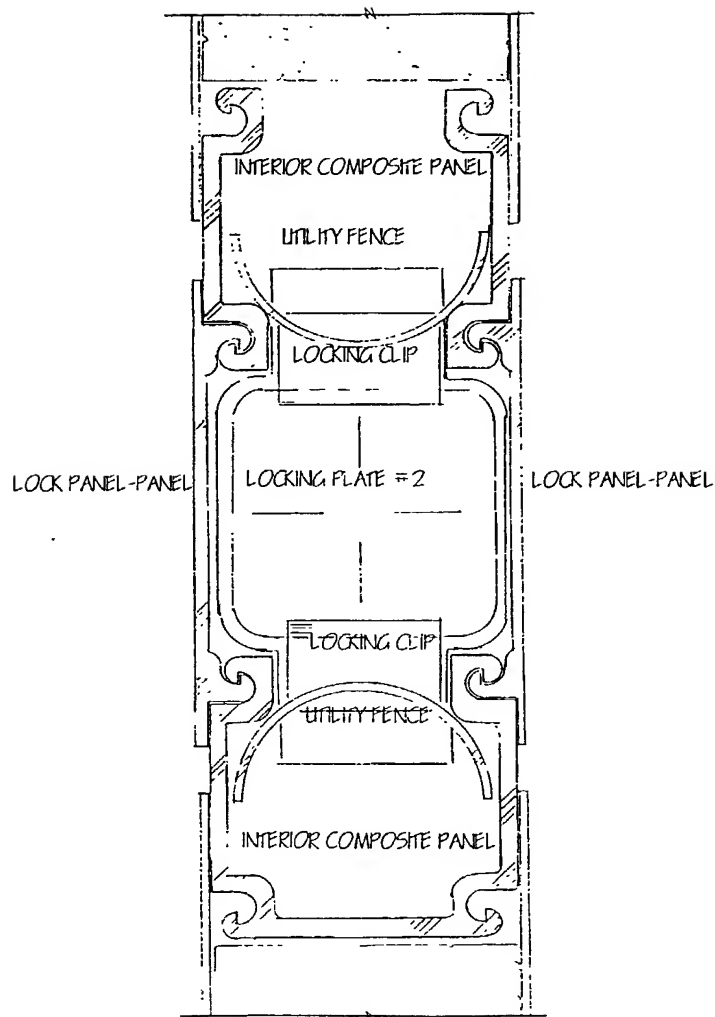


WO 00/68523

PCT/US00/12795

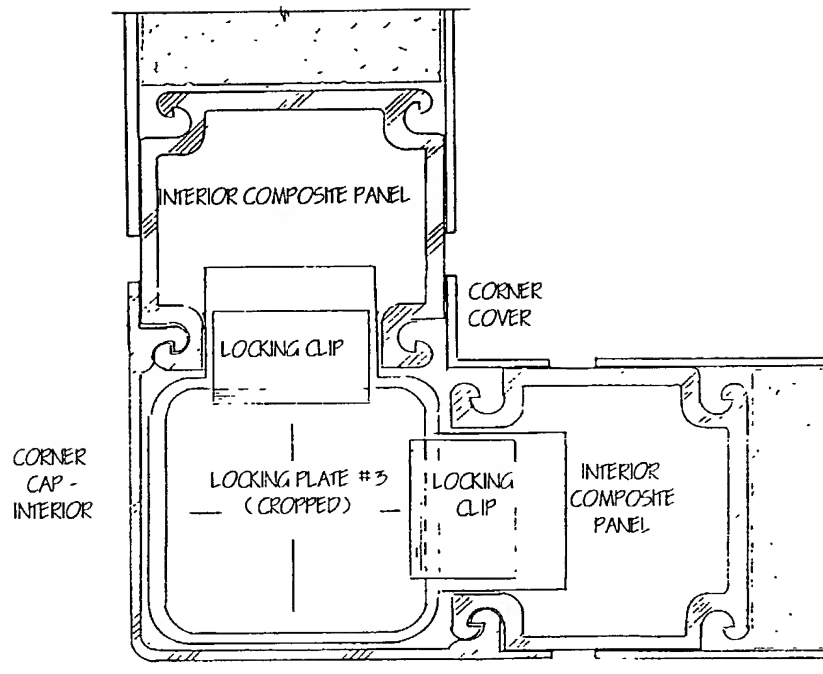


WO 00/68523

PCT/US00/12795

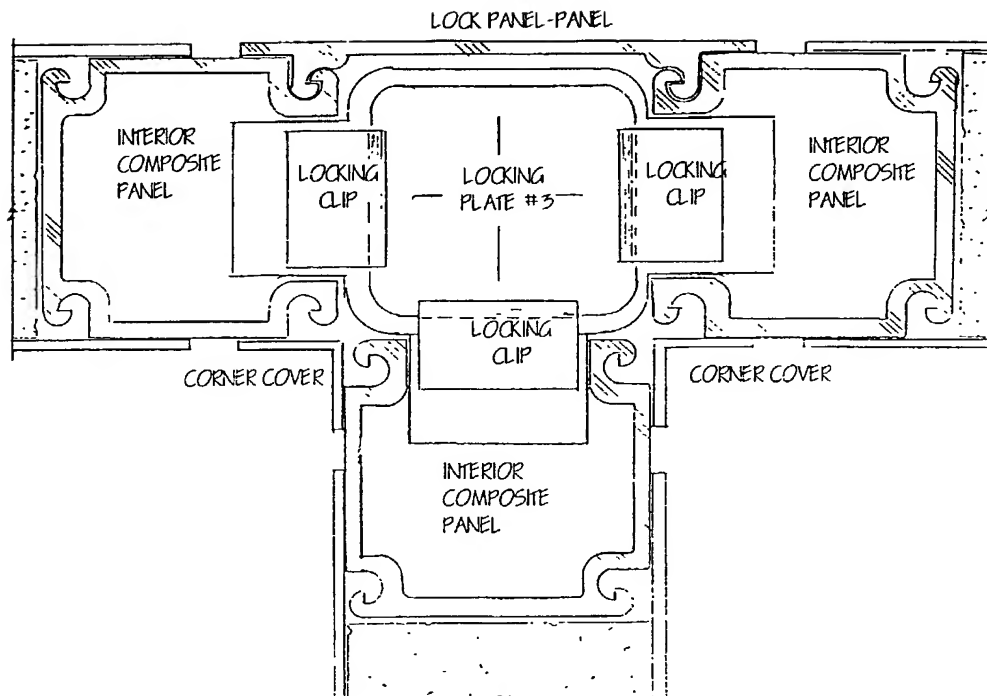


WO 00/68523

PCT/US00/12795

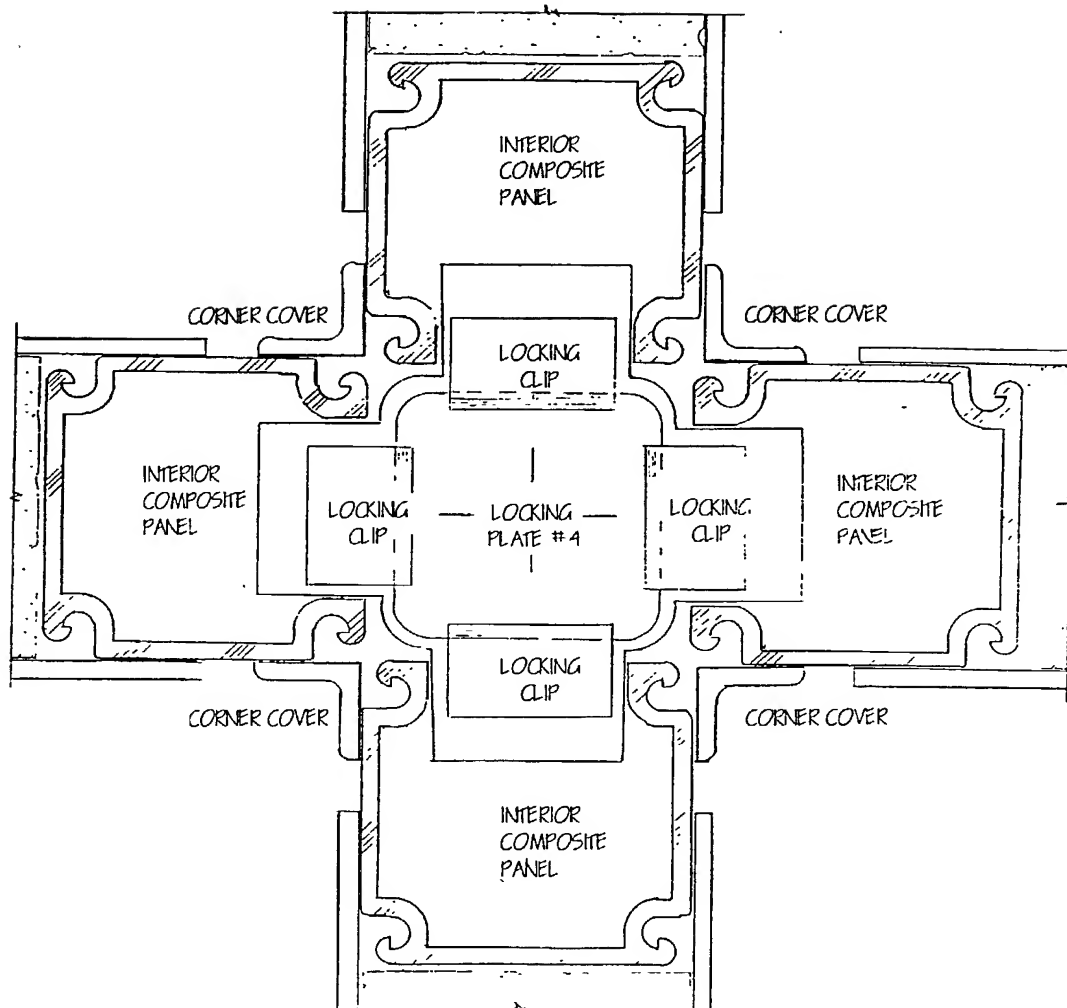


WO 00/68523

PCT/US00/12795

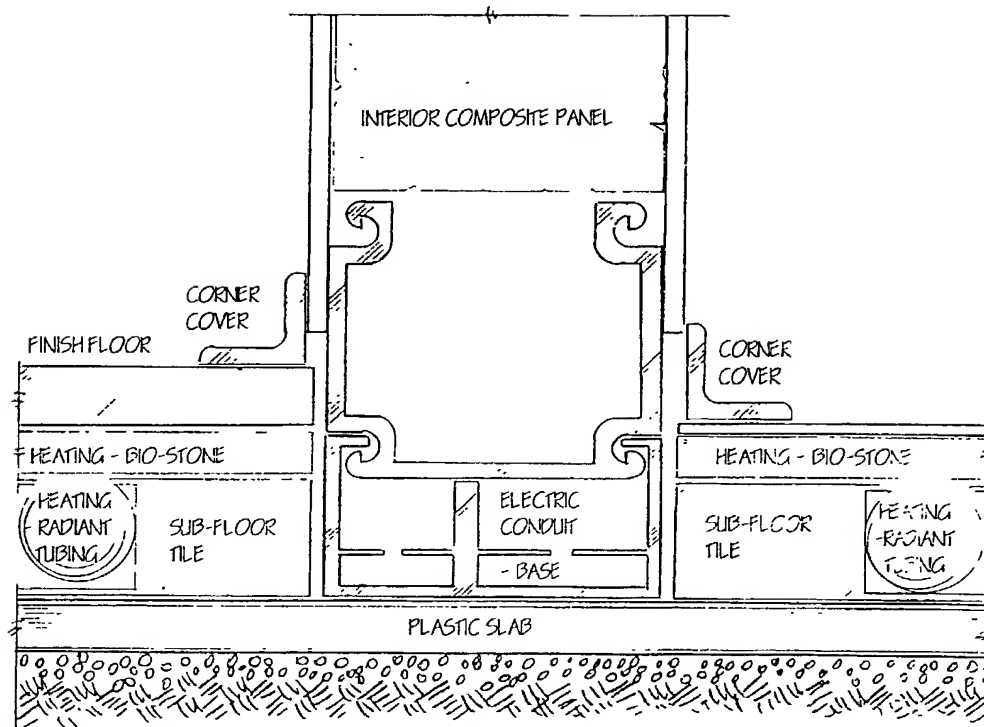


WO 00/68523

PCT/US00/12795

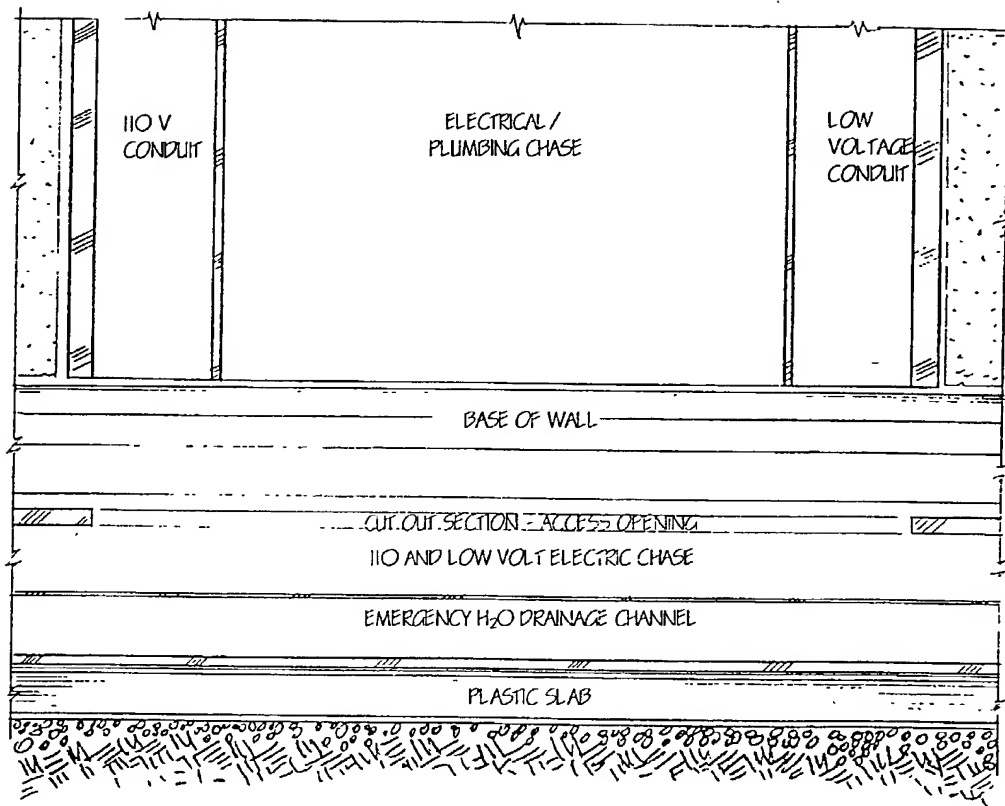


WO 00/68523


PCT/US00/12795

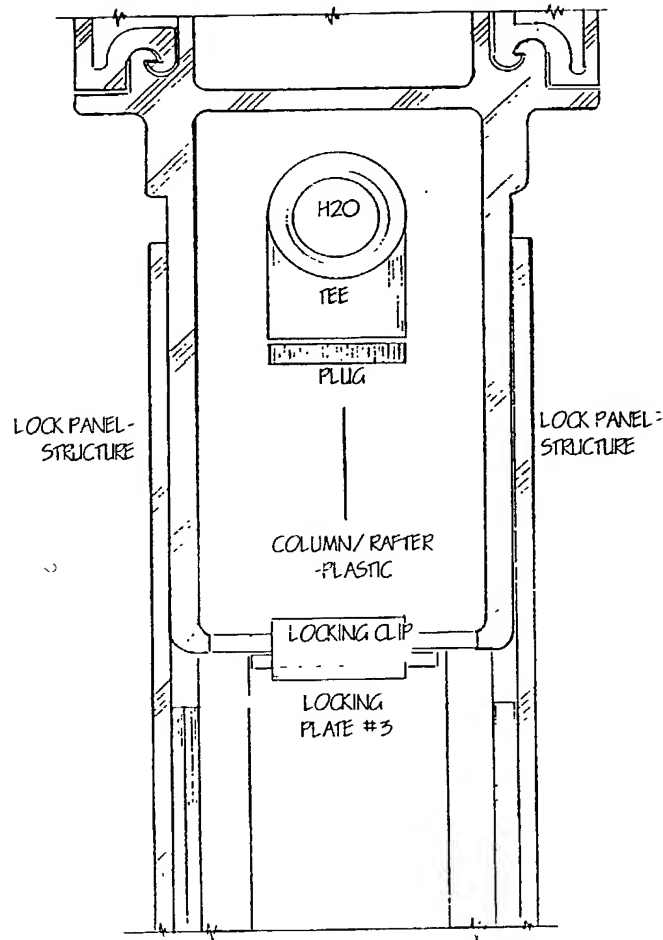

WO 00/68523


PCT/US00/12795

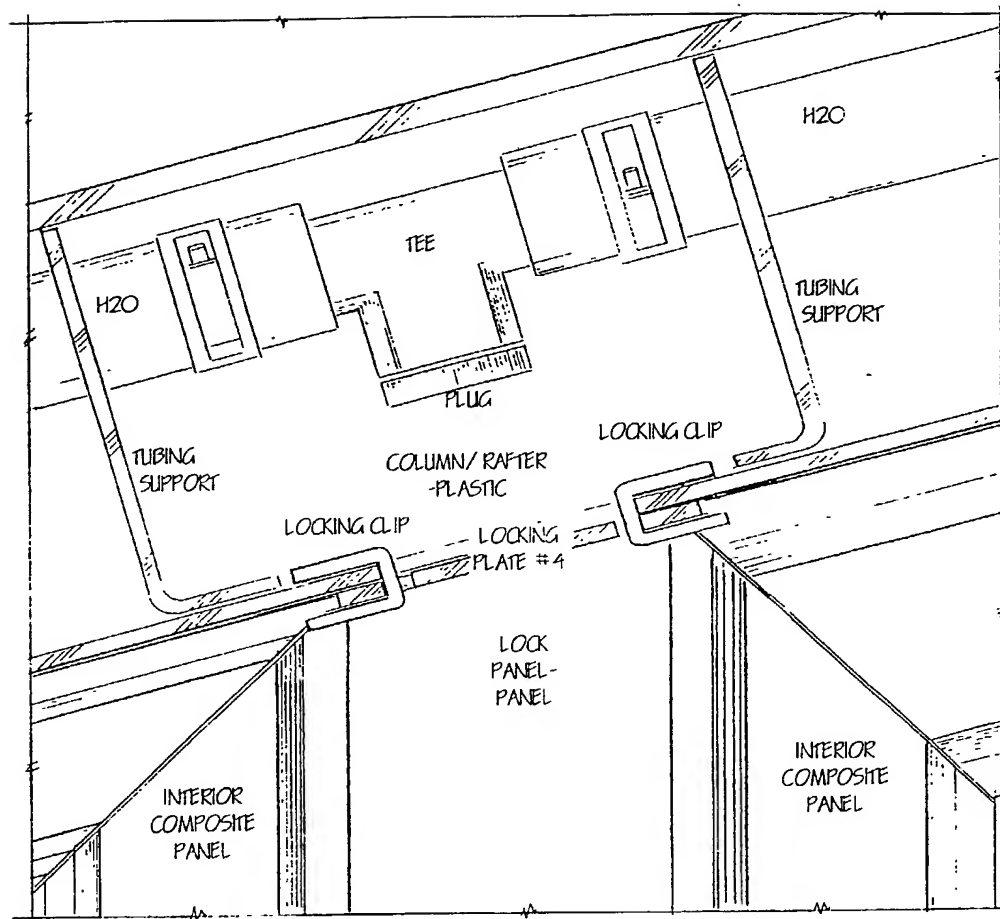


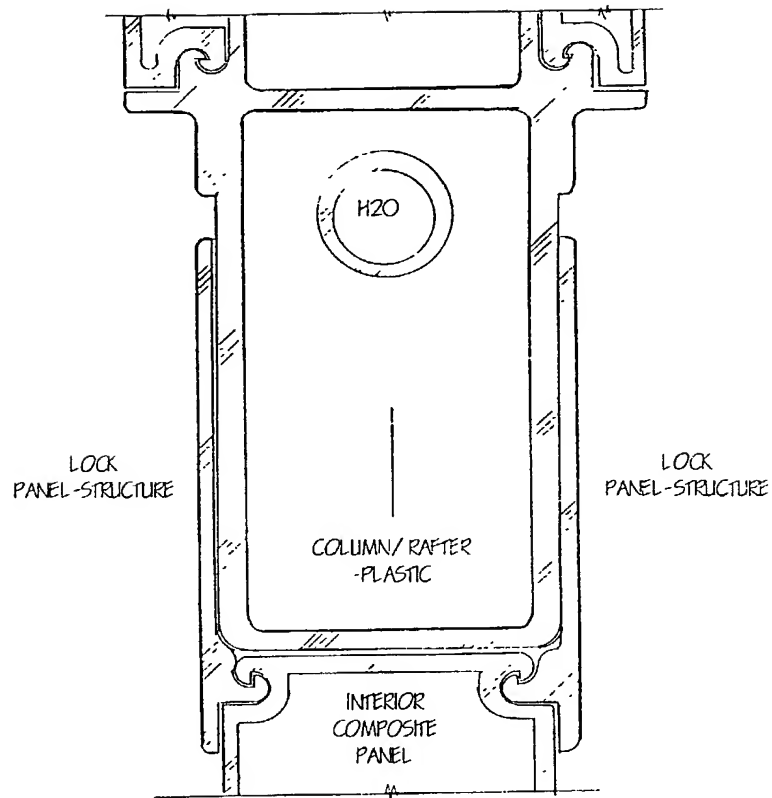

WO 00/68523


PCT/US00/12795

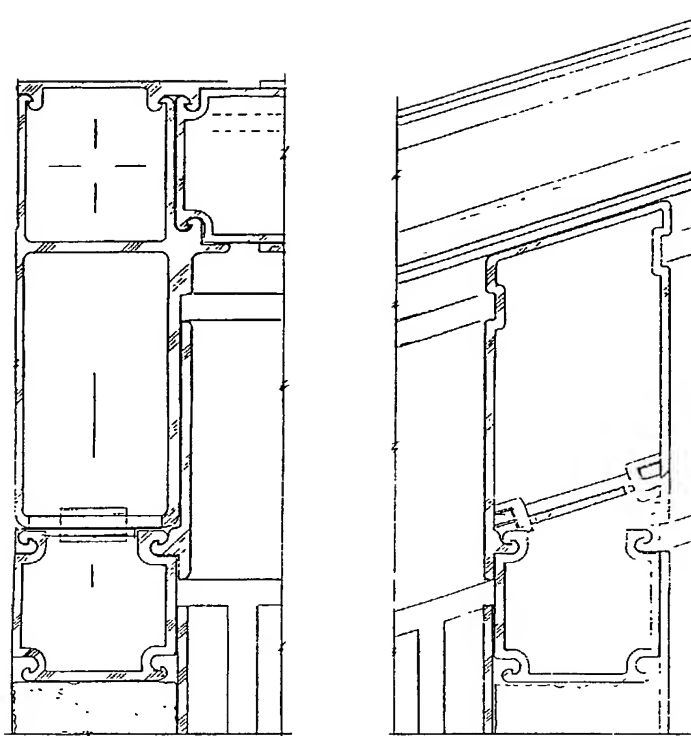

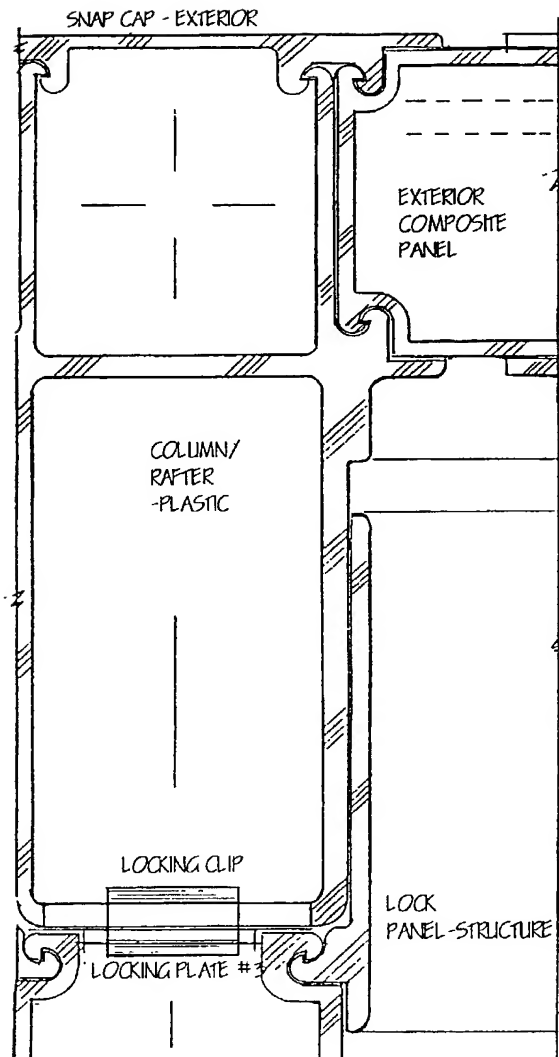


WO 00/68523

PCT/US00/12795

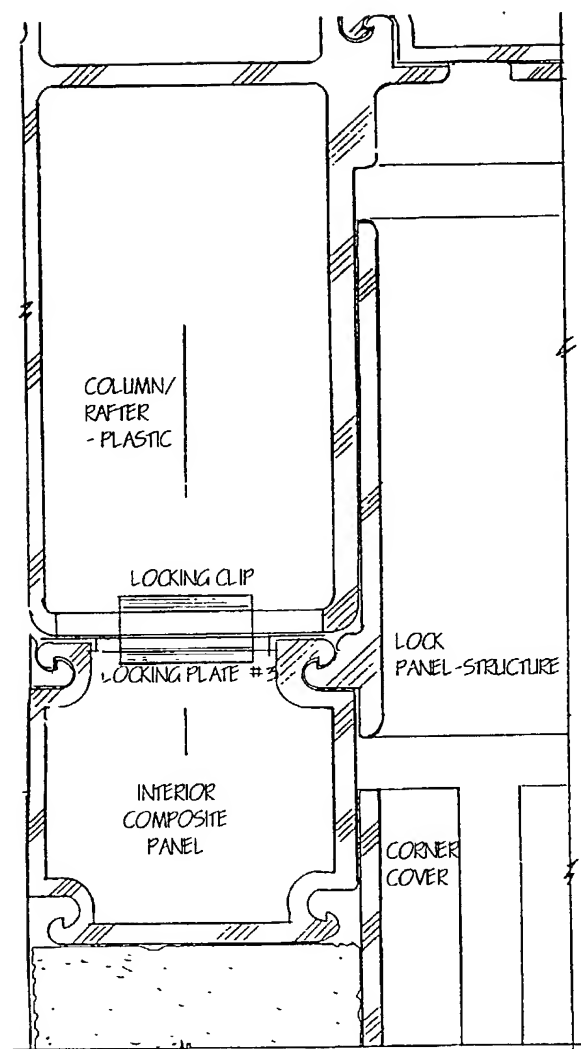


WO 00/68523

PCT/US00/12795

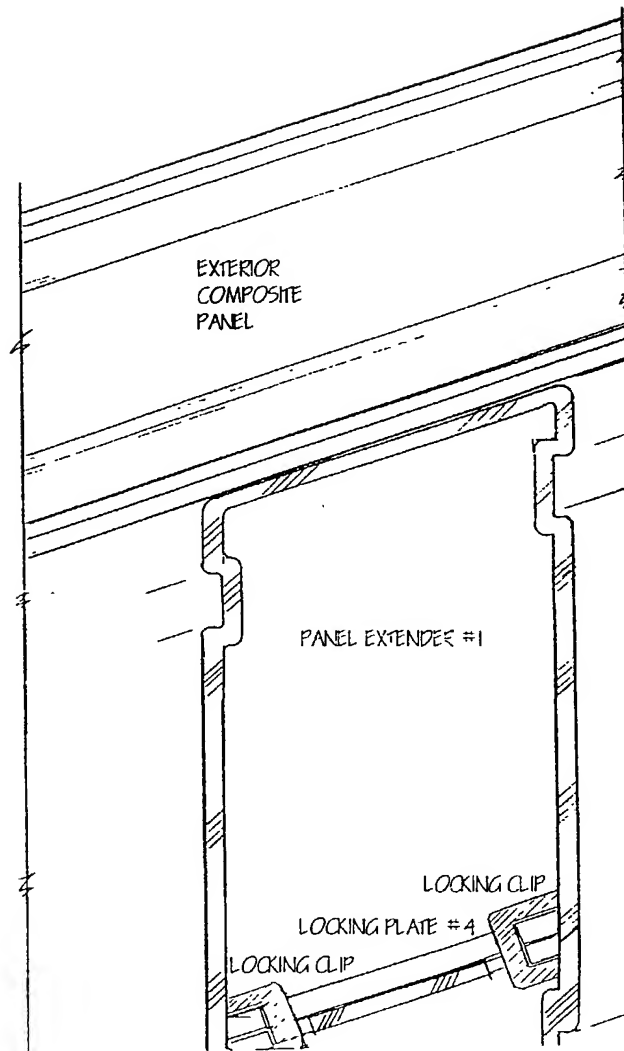

WO 00/68523

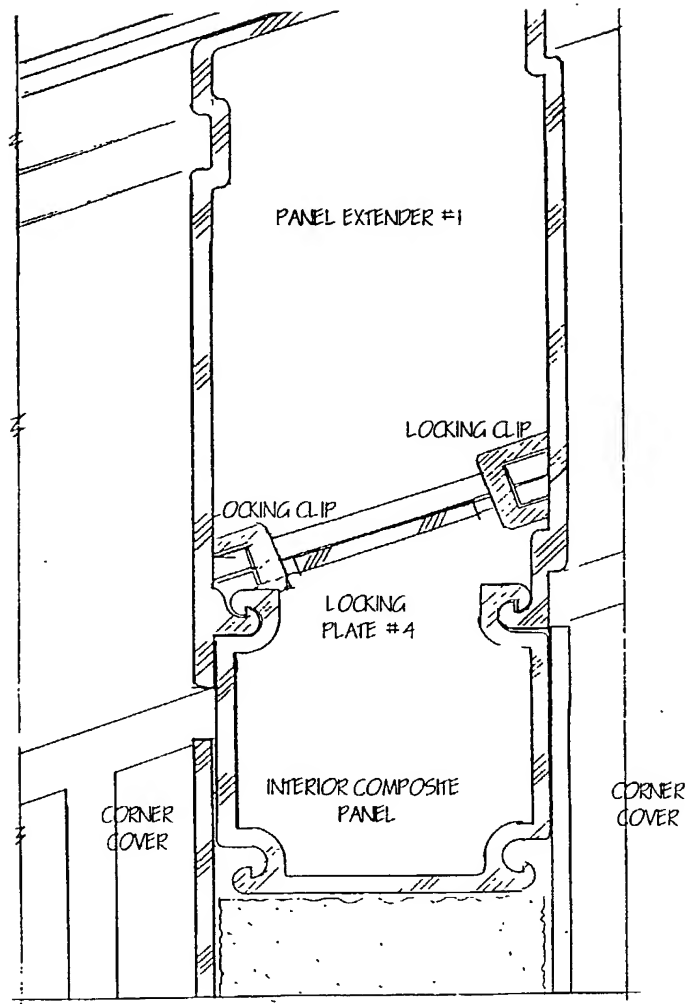


1000459 00002

10/009369


PCT/US00/12795


WO 00/68523

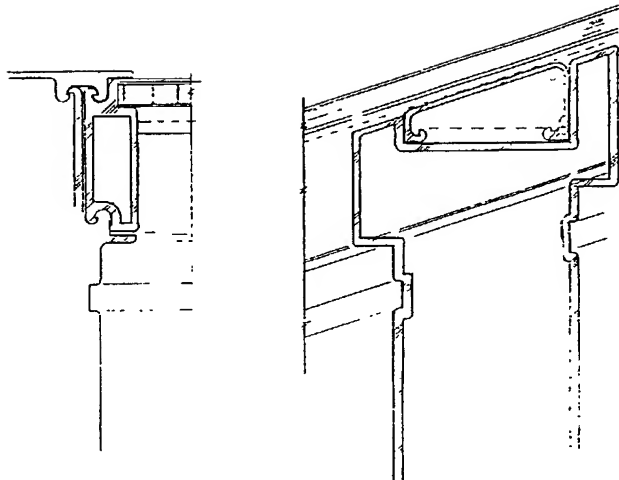


WO 00/68523


PCT/US00/12795

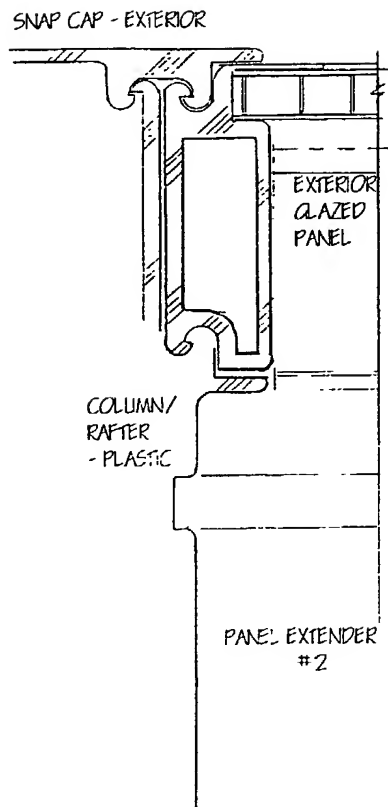

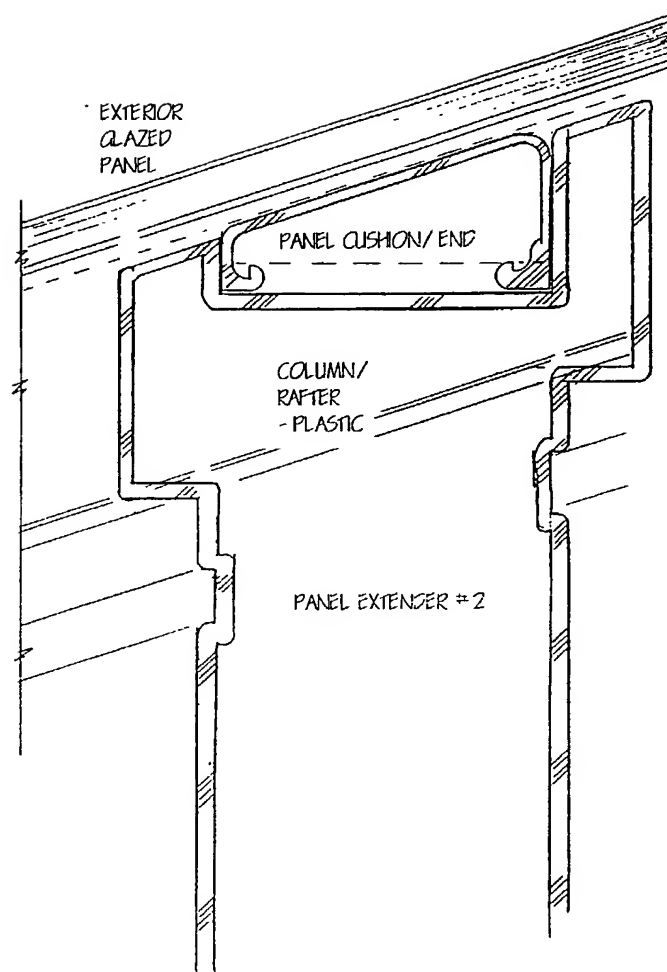


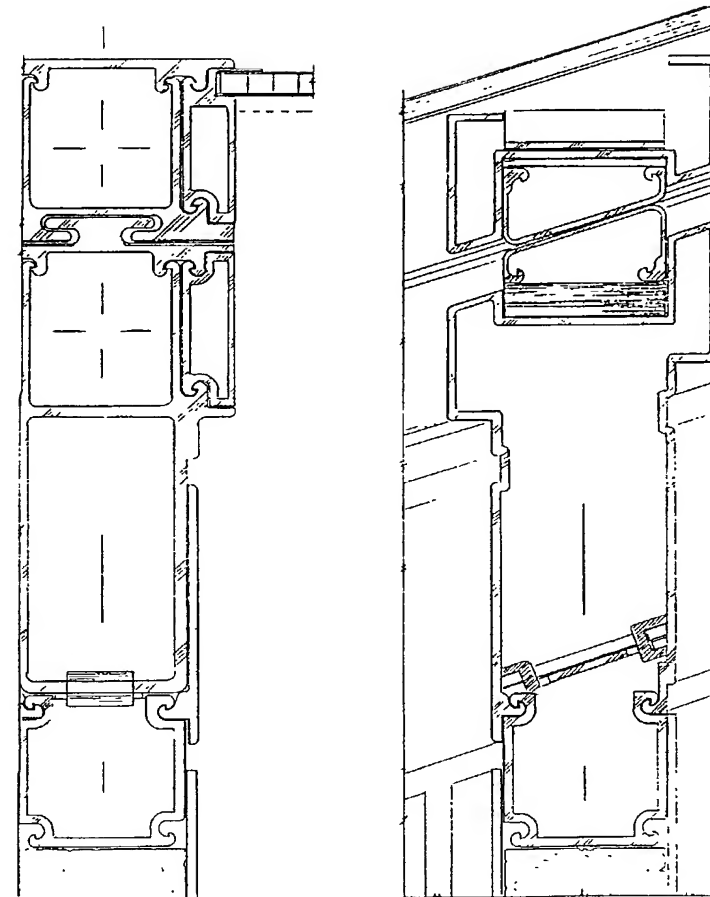



WO 00/68523

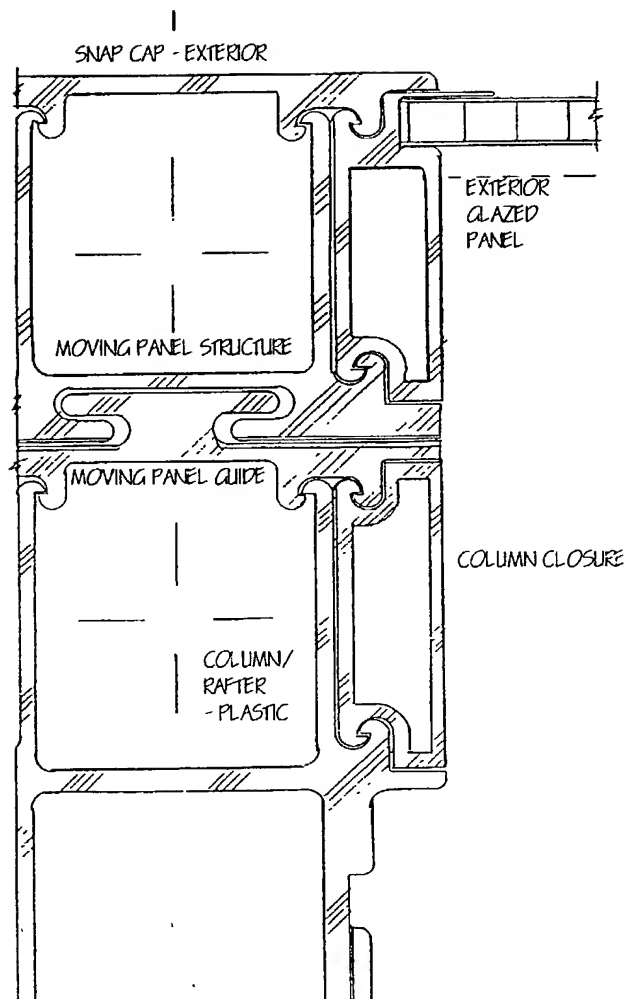

WO 00/68523

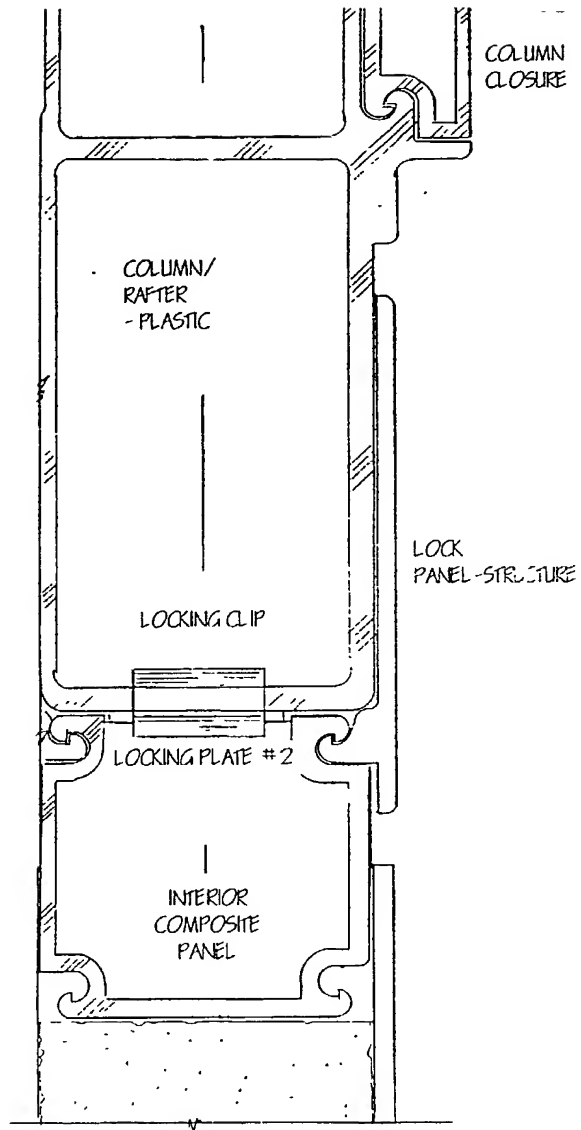

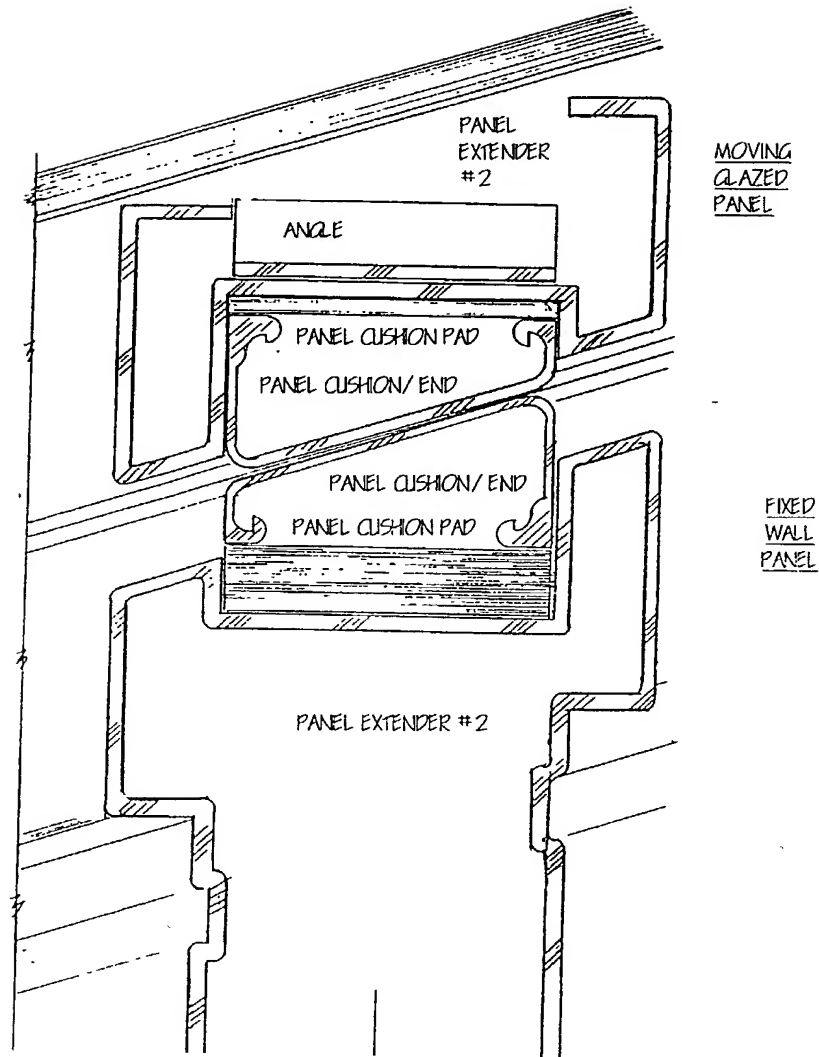

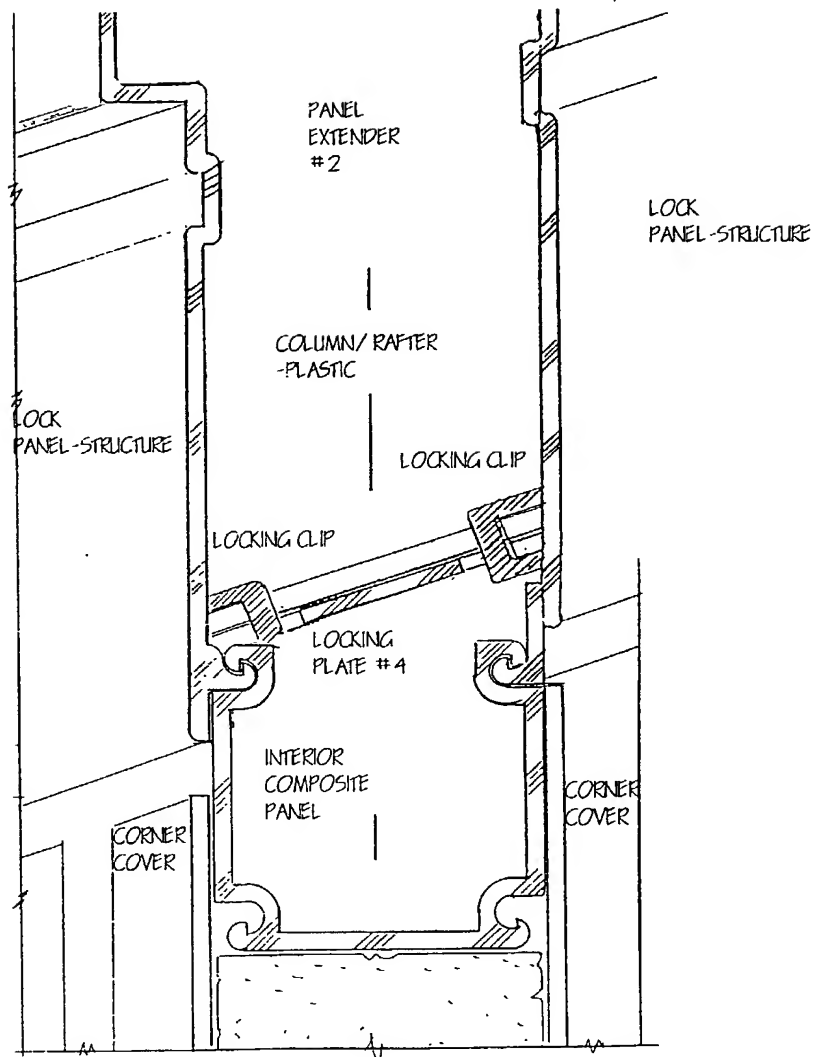

INDEX: INTERIOR WALL


DRAWING	DESCRIPTION
IW01A-019	PLAN @ EXTERIOR SIDEWALL @ ADJOINING INTERIOR WALL
IW01B-019	PLAN @ EXTERIOR GABLE COLUMN @ ADJOINING INTERIOR WALL
IW01C-019	PLAN @ END OF INTERIOR WALL
IW01D-019	PLAN @ INTERIOR WALL CONNECTION
IW01E-019	PLAN @ INTERIOR WALL CORNER
IW01F-019	PLAN @ 3-WAY INTERIOR WALL
IW01G-019	PLAN @ 4-WAY INTERIOR CORNER
IW02A-019	SECTION @ BASE OF INTERIOR WALL
IW02B-019	SECTION @ BASE OF INTERIOR WALL
IW03A-019	SECTION @ TOP OF INTERIOR WALL @ JUNCTION
IW03B-019	SECTION @ TOP OF INTERIOR WALL @ JUNCTION
IW03C-019	SECTION @ TOP OF INTERIOR WALL @ WALL PANEL
IW04A-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04B-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04C-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04D-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04E-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW05A-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
IW05B-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
IW05C-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
IW06A-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06B-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06C-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06D-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06E-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF

WO 00/68523

PCT/US00/12795

INDEX: MANIFOLD UNIT

DRAWING	DESCRIPTION
MU01A-019	MANIFOLD CONTROL SYSTEM
MU02A-019	DETAILS @ MANIFOLD UNIT
MU02B-019	PLAN @ MANIFOLD @ DOOR
MU03A-019	FIRE SUPPRESSION SYSTEM @ RAFTER
MU04A-019	SECTION @ EXTERIOR HOSE BIB
MU05A-019	PRE-PLUMBED WALL
MU05B-019	CONCEPT @ PLUMBING WALL
MU06A-019	PLAN OF MODULAR BATHROOM
MU06B-019	PLAN OF MODULAR BATHROOM
MU07A-019	SECTION @ DRAINAGE SYSTEM FOR ELECTRICAL PROTECTION
MU07B-019	SECTION @ BASE OF WALL

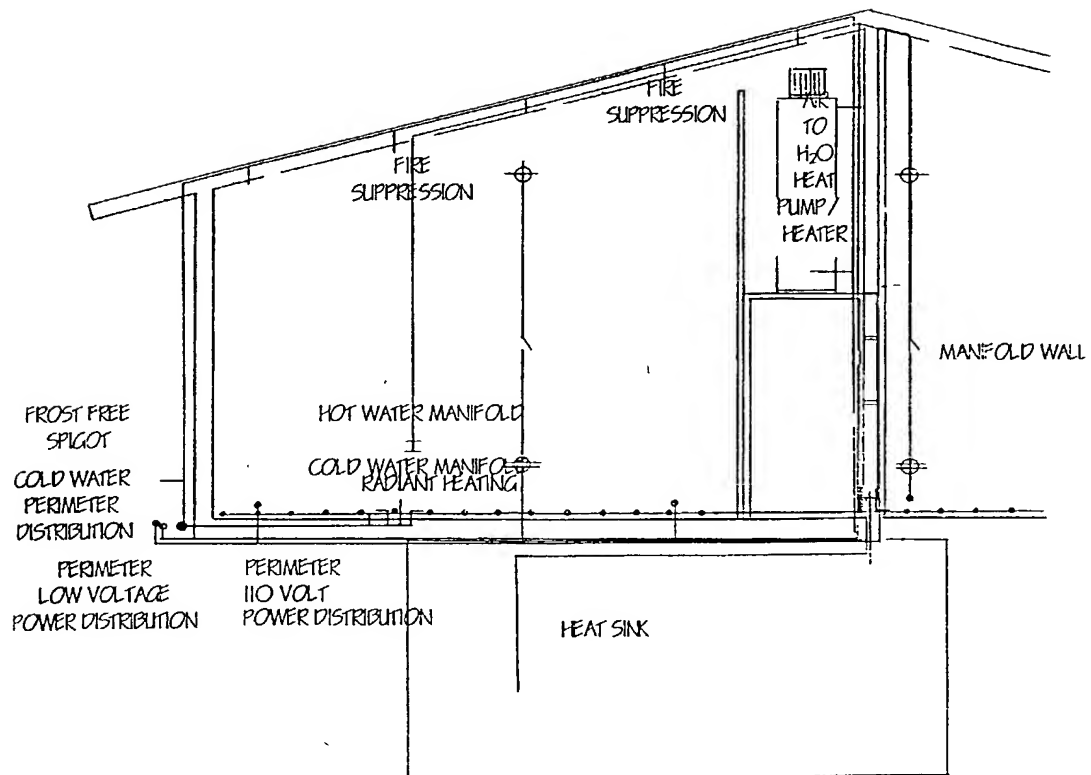

10009369 10/009369


WO 00/68523

PCT/US00/12795

500



PLAN @ TOP




PLAN @ BOTTOM

250 250


1080

1080

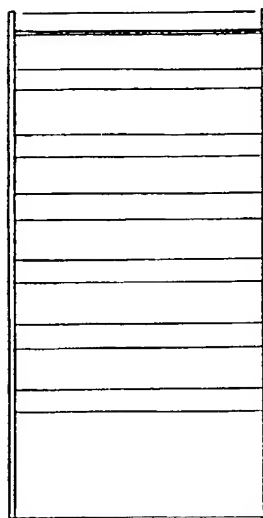

ELEVATION


500




SECTION

WO 00/68523


PCT/US00/12795

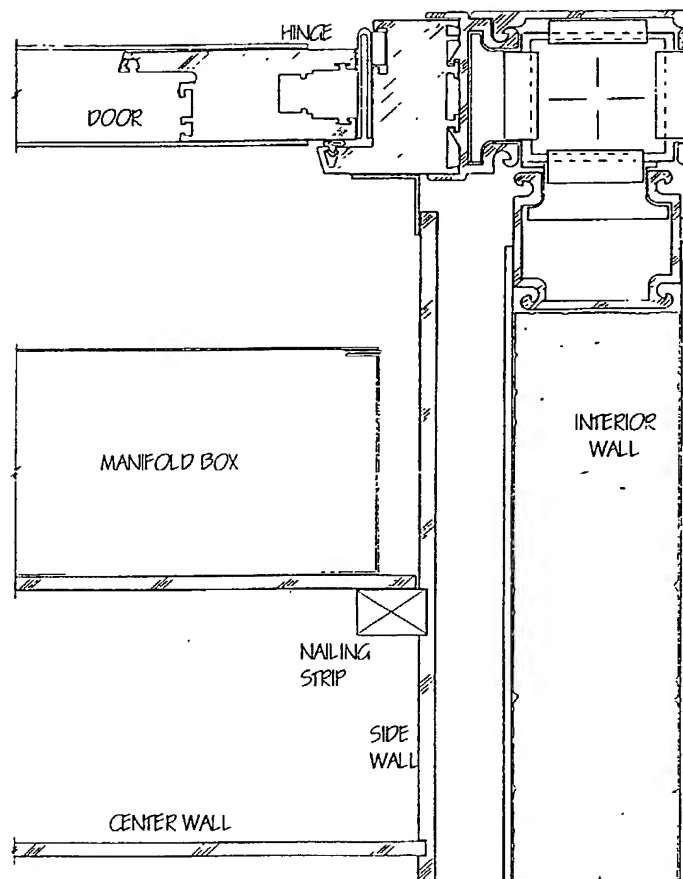


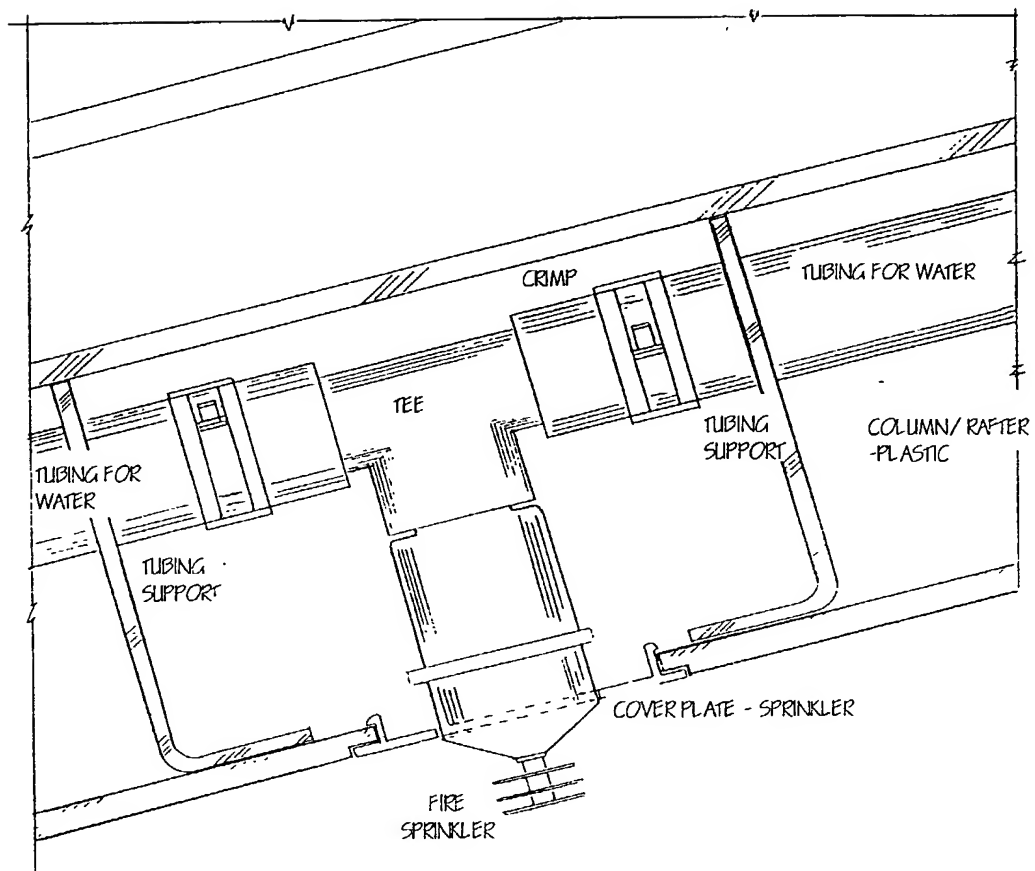


WO 00/68523

PCT/US00/12795

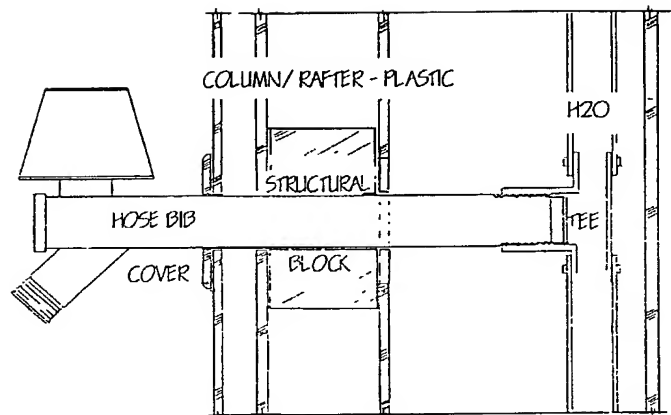

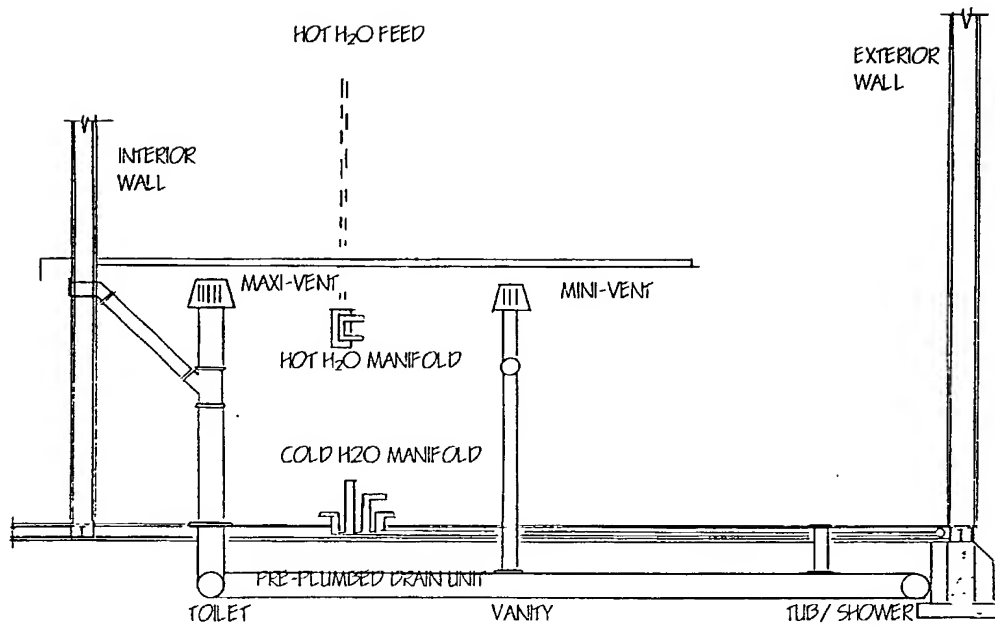



WO 00/68523

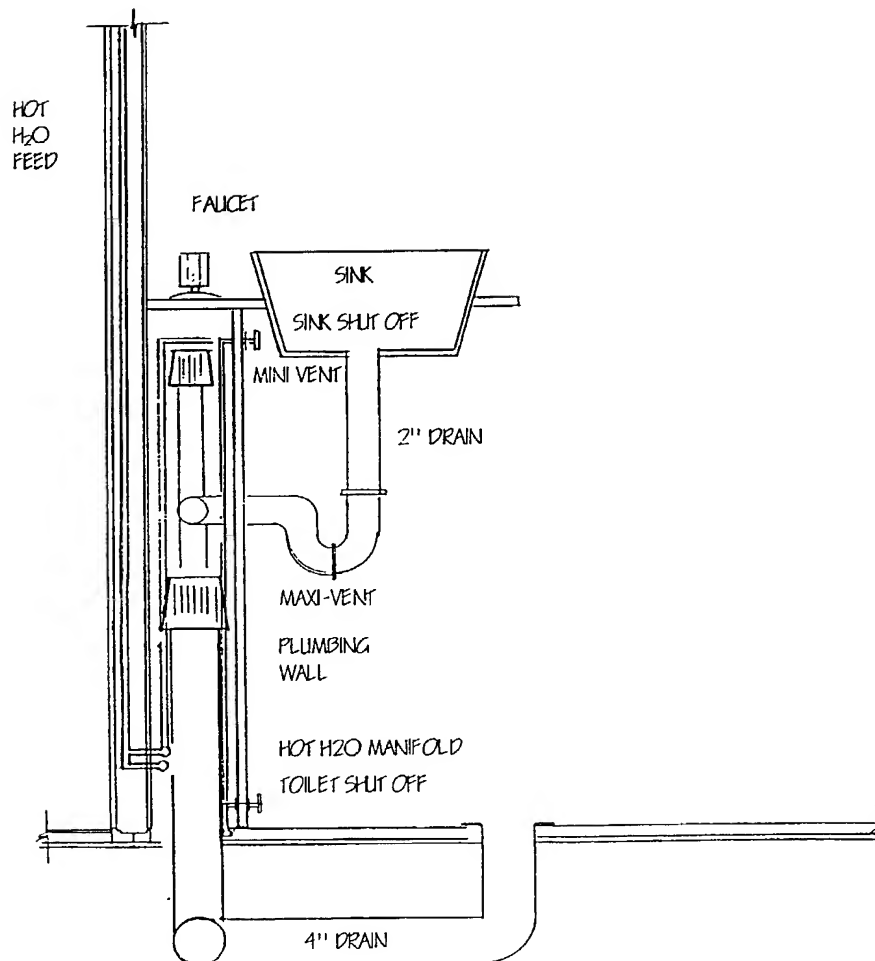
10/009369
PCT/US00/12795


WO 00/68523

PCT/US00/12795

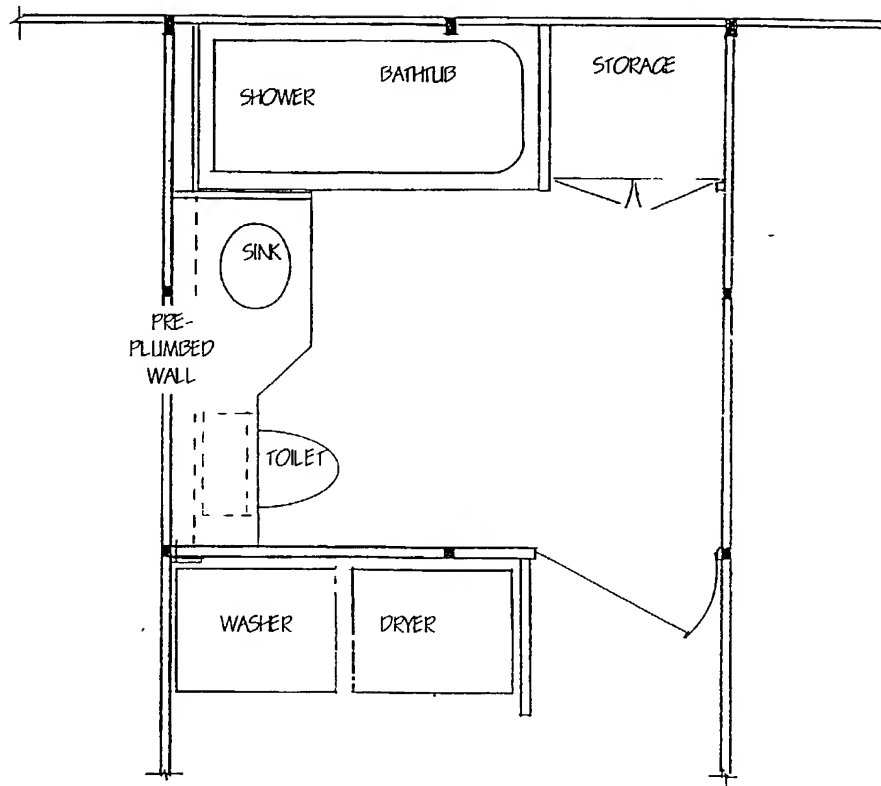

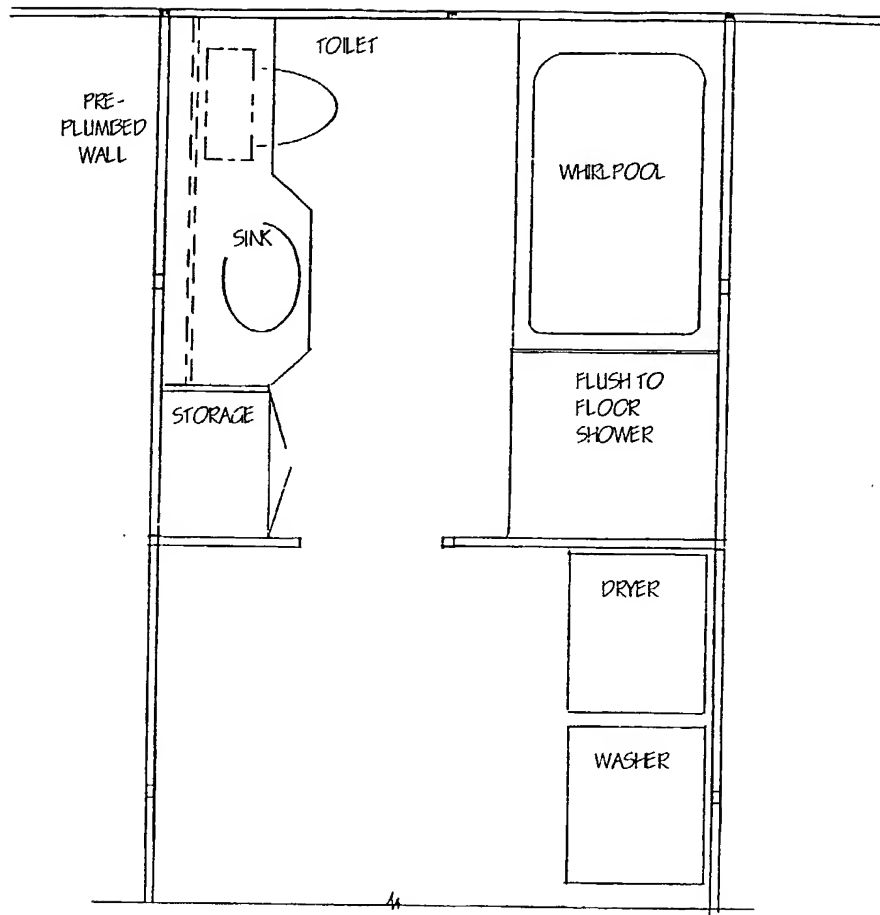



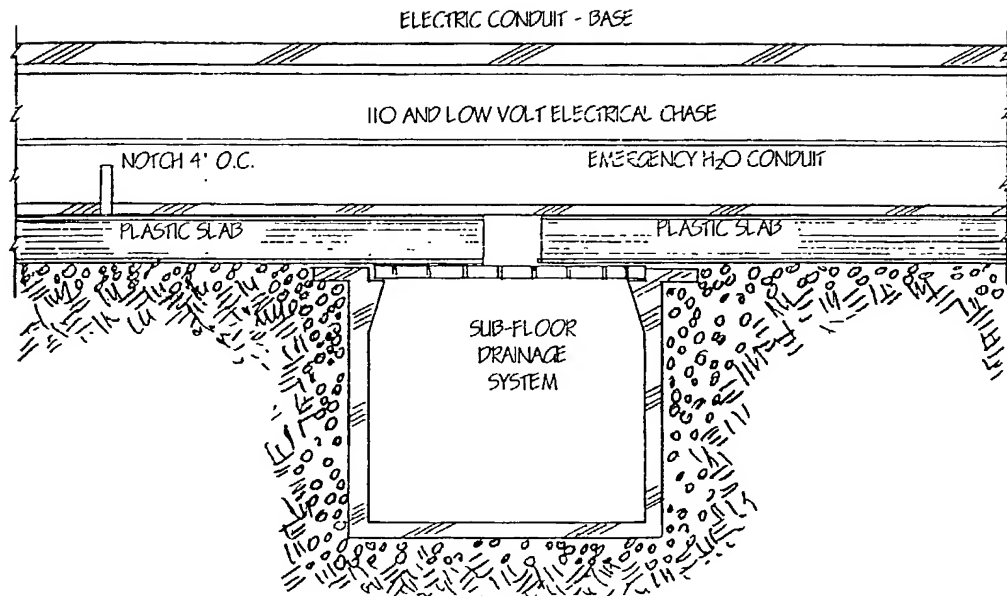


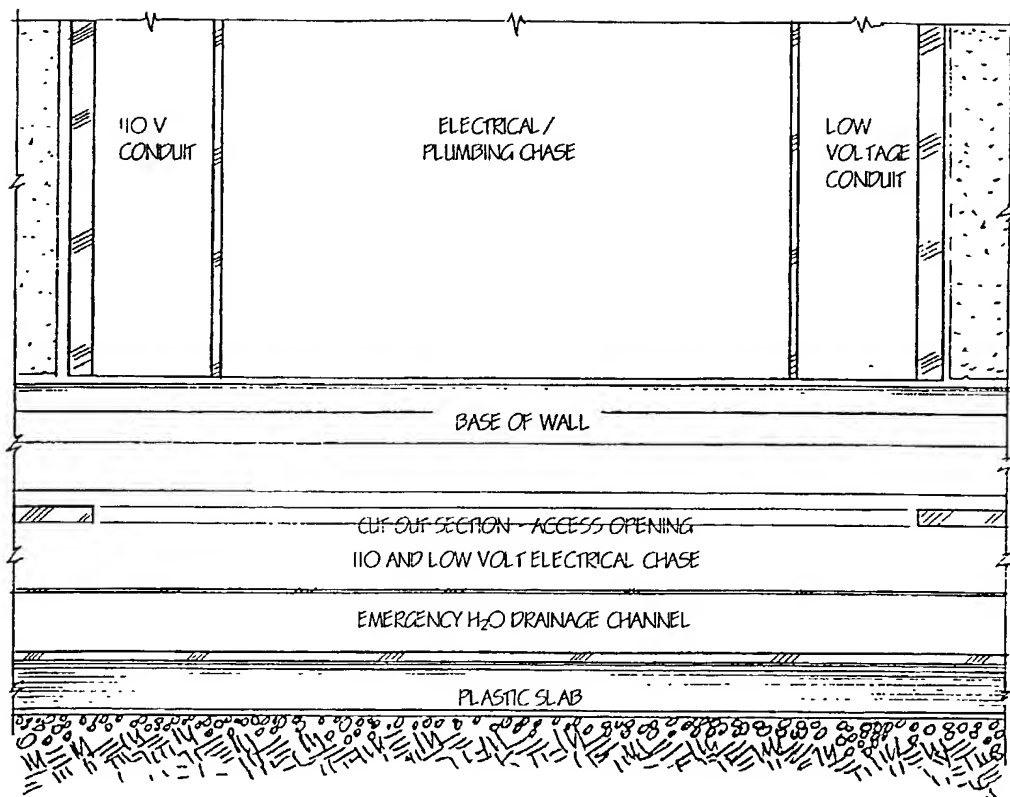

WO 00/68523

PCT/US00/12795

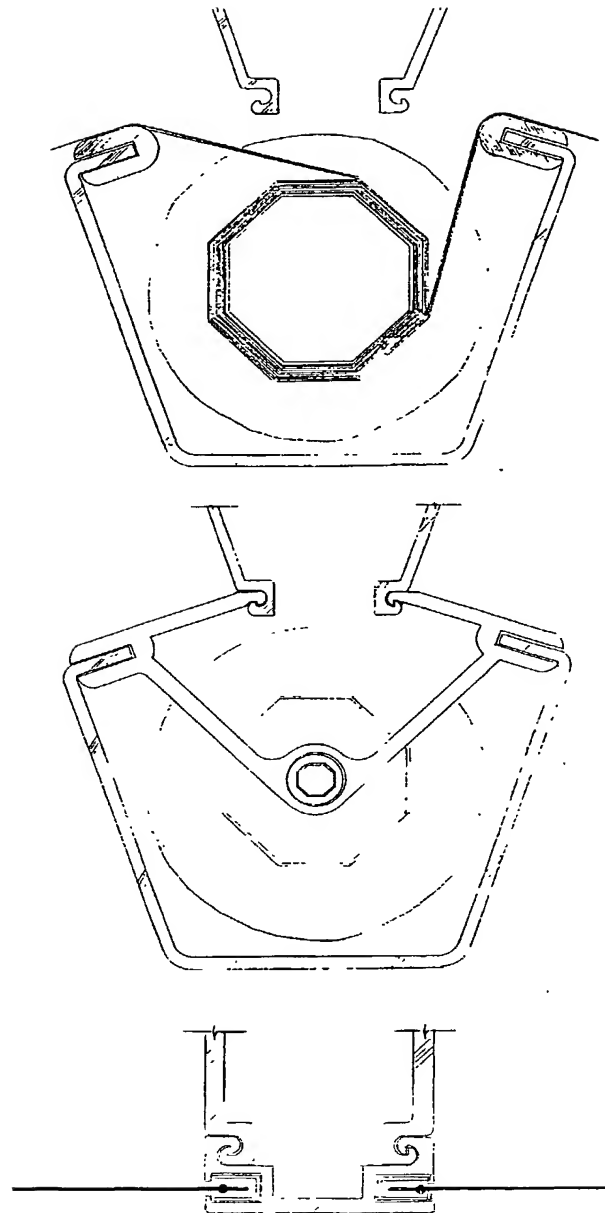


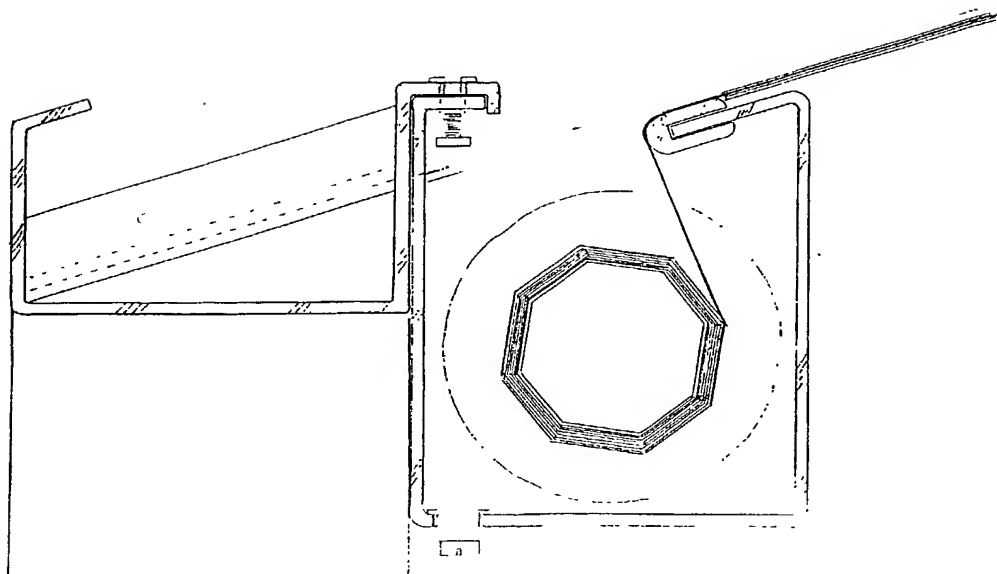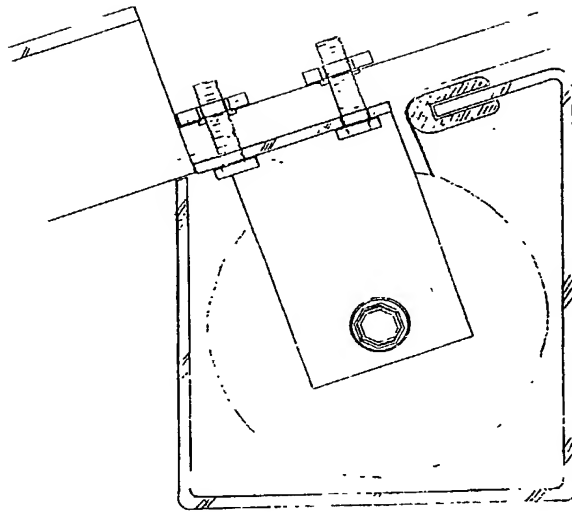

Customization template system

When the desire is for customization, it is easily accomplished.

The exact final desired position is marked on the extrusion, the provided template inserted over the extrusion to this mark, the locking handle on the template is tightened, the extrusion again is marked on the opposite edge of the template. The template is moved to the new mark. The extrusion is then cut and drilled. The second template inserted and the extrusion is drilled again and is ready to be snapped into place.

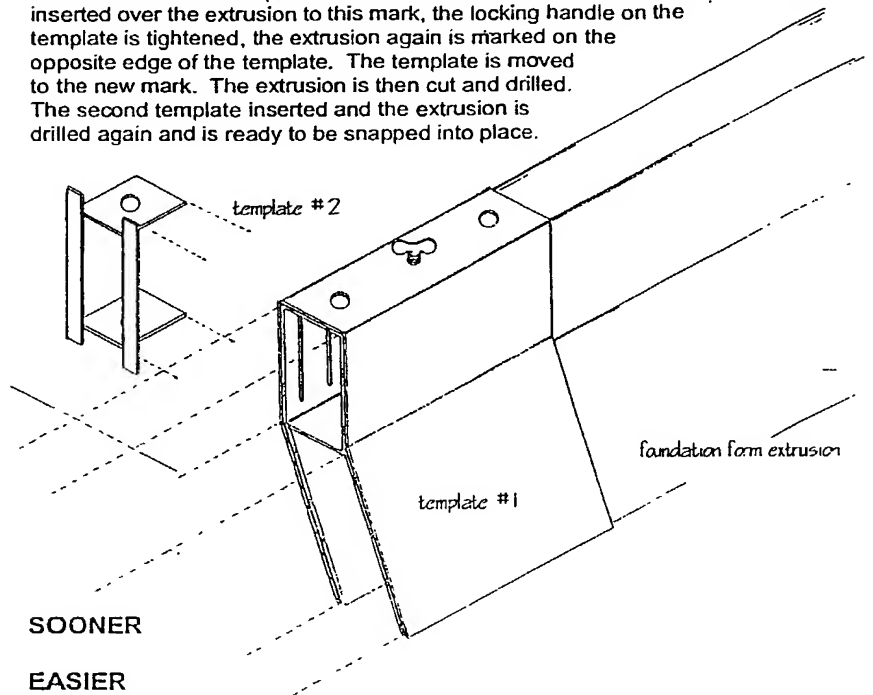

SOONER

EASIER


CHEAPER

SAFER

ABSTRACT
(a)(b)
46

Everything returns to the standard way of snapping-it-together from there.

After a few projects, the team will become very proficient and quickly finish this part of the work in a day. AND, the project is ready for them to proceed with the construction.

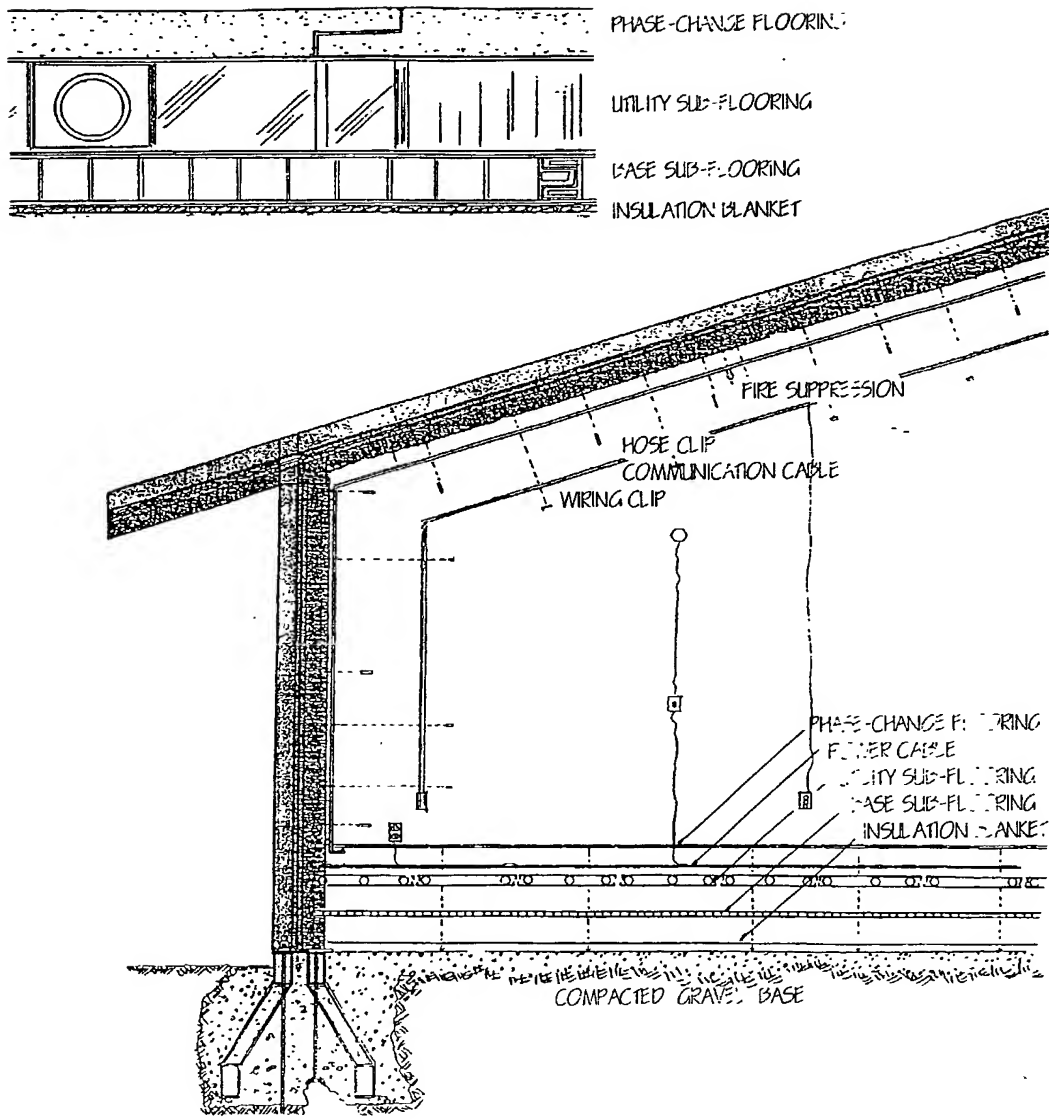


10000

10/009369


WO 00/68523



PCT/US00/12795

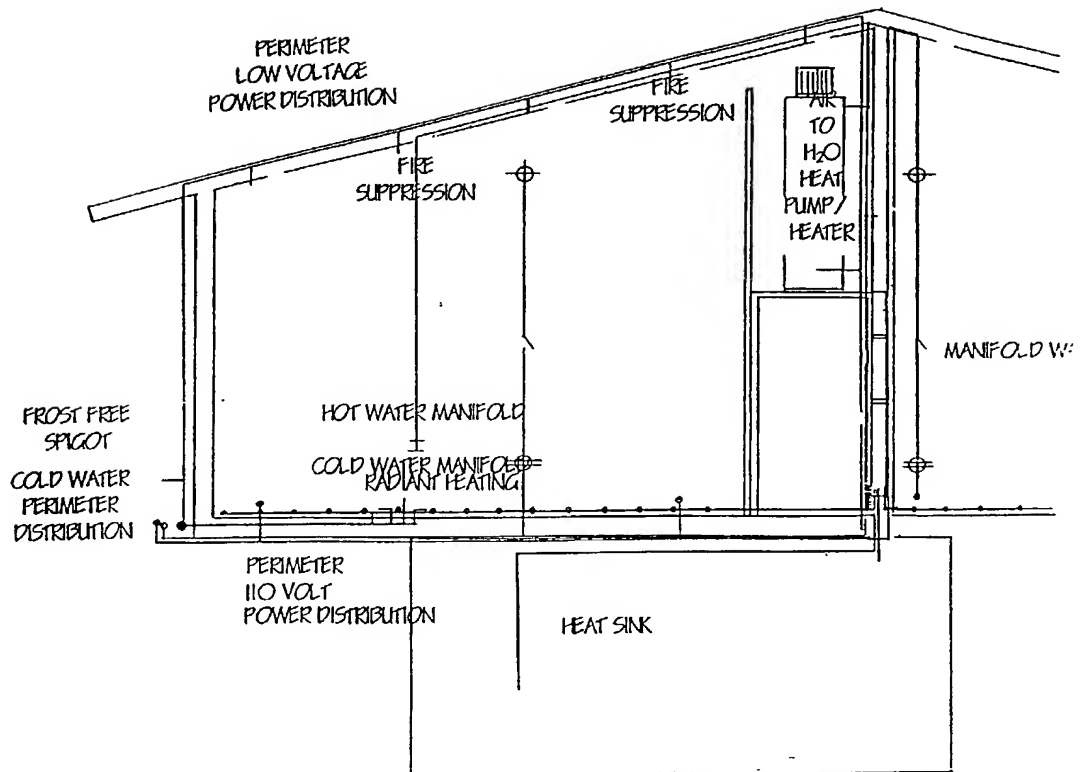


WO 00/68523


PCT/US00/12795



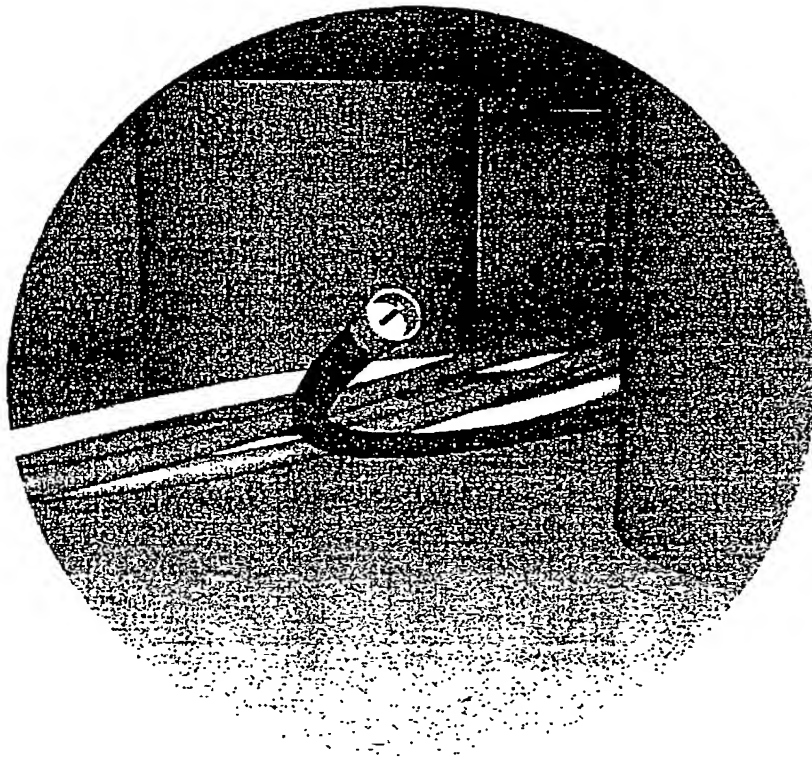


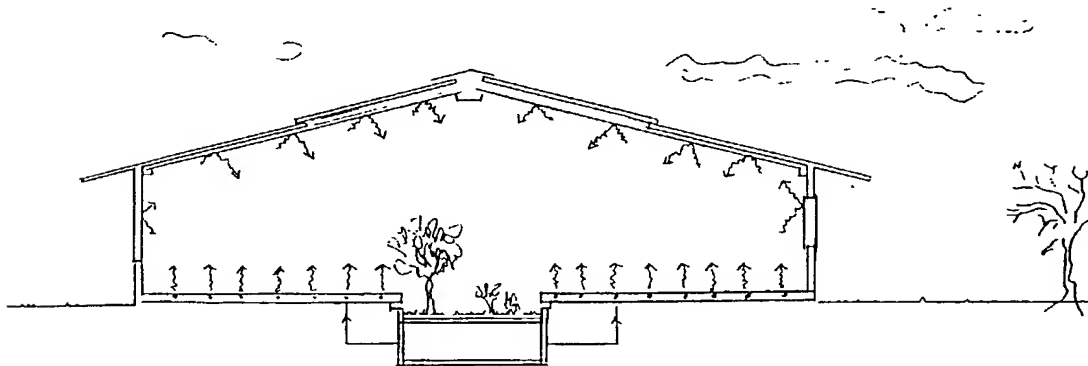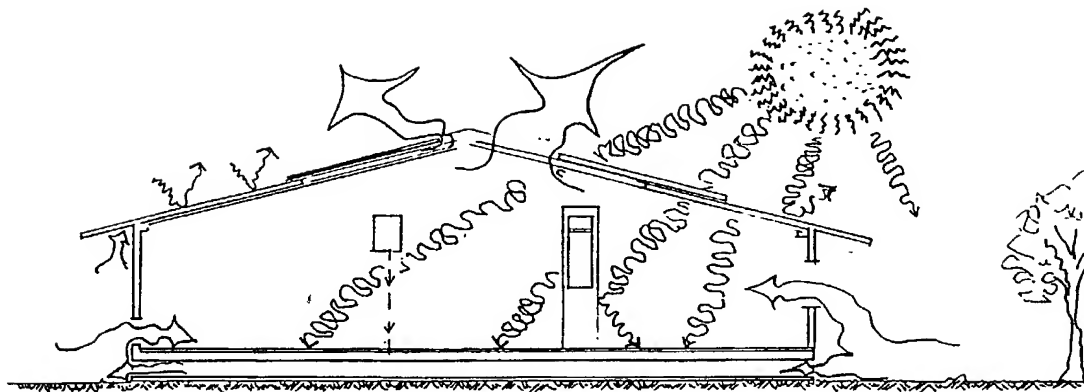


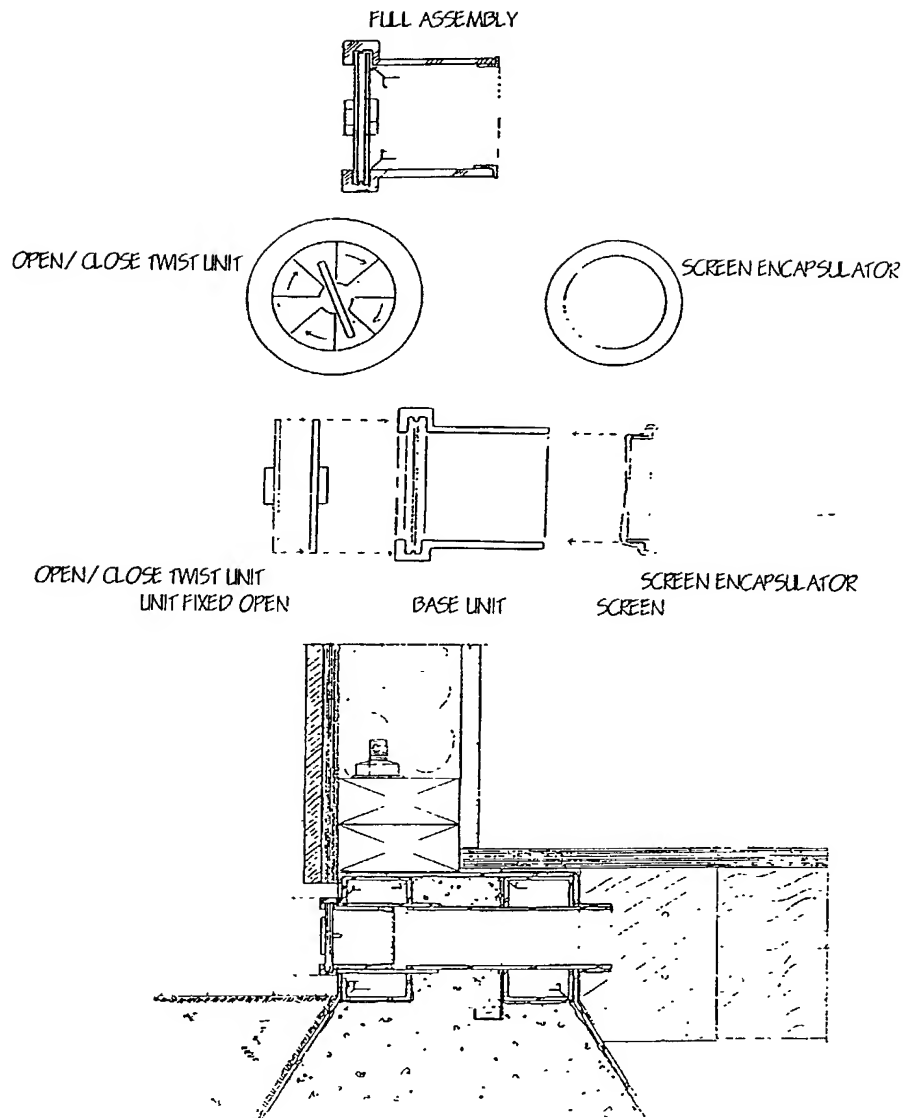

WO 00/68523

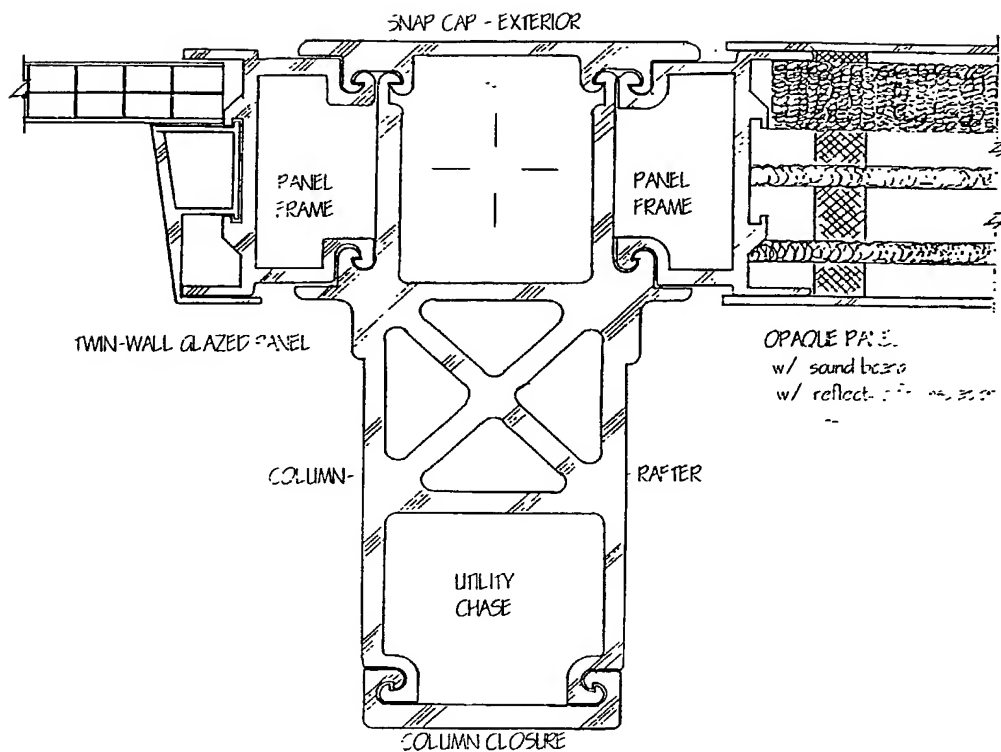

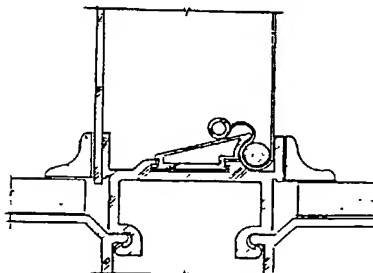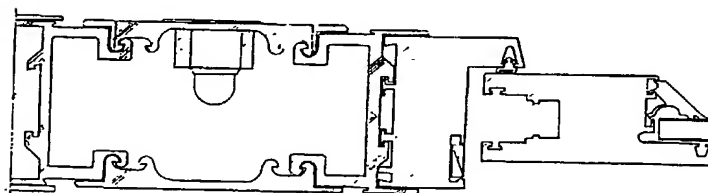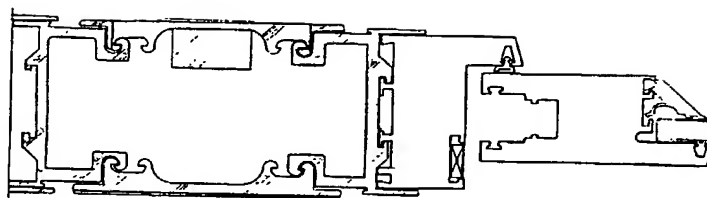

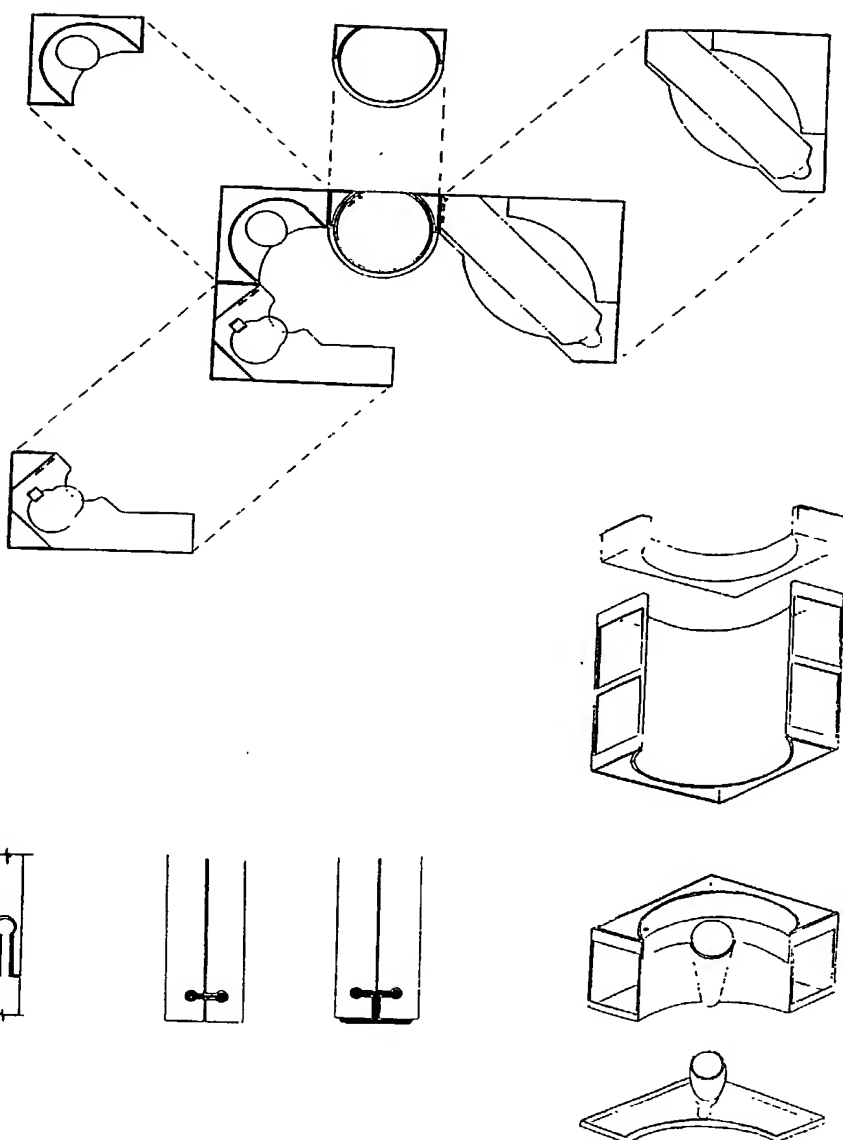

~~As a~~ below-named inventor, I hereby declare that:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which
(check one)

_____ is attached hereto.
X was filed on November 8, 2001 as Application Serial No. 10/009,369
 and was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a-d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT application which designated at least one country other than the United States of America, listed below and also have identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

		<u>Priority Claimed</u>	
		YES	NO
<u>PCT/US00/12795</u>	<u>10/05/2000</u>	<u>X</u>	
(Number)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined

in title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u> </u> (Application Serial No.)	<u> </u> (Filing Date)	<u> </u> (Status) (patented, pending, abandoned)
---	--	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (Listed name and registration number).

J. Pierre Kolisch, Reg. No. ~~15,802~~; Jon M. Dickinson, Reg. No. ~~22,820~~; John M. McCormack, Reg. No. ~~26,948~~; Peter E. Heuser, Reg. No. ~~27,902~~; David P. Cooper, Reg. No. ~~33,372~~; Pierre C. Van Rysselberghe, Reg. No. ~~33,557~~; Walter W. Karnstein, Reg. No. ~~35,565~~; Charles H. DeVoe, Reg. No. ~~37,305~~; David S. D'Ascenzo, Reg. No. ~~39,952~~; Owen W. Dukelow, Reg. No. ~~41,002~~; James R. Abney, Reg. No. ~~42,253~~; Mark D. Alleman, Reg. No. ~~42,257~~; Michael M. Hall, Reg. No. ~~43,653~~; Christopher S. Tuttle, Reg. No. ~~41,357~~; Barbara A. McCoy, Reg. No. ~~46,077~~; David E. Hall, Reg. No. ~~51,172~~; Ellen M. Gonzales, Reg. No. ~~44,128~~; Paul W. Churilla, Reg. No. ~~47,495~~; Thomas A. Dougherty, Reg. No. ~~51,214~~; Stanley M. Hollenberg, Reg. No. ~~47,658~~; and Anton E. Skaugset, Reg. No. ~~38,617~~

SEND CORRESPONDENCE TO:

Kolisch, Hartwell, Dickinson,
McCormack & Heuser
200 Pacific Building
520 S.W. Yamhill Street
Portland, Oregon 97204

DIRECT TELEPHONE CALLS TO
(name and telephone number)

JON M. DICKINSON

(503) 224-6655

Full name of sole

or first inventor: JAMES H. CROWELL

05-10-02

INVENTOR'S SIGNATURE:

DATE:

Residence:

Lake Oswego, Oregon

Citizenship:

U.S.

Post Office Address:

4629 SW Lakeview Blvd., Lake Oswego, Oregon 97035